

DYNAMIC ABUTMENT SOLUTIONS

DIGITAL SOLUTIONS

PRODUCT REFERENCES





Virginia Woolf, 17
25005 · Lleida (Spain)

INTERNATIONAL +34 873 450 709
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

Dynamic Abutment Solutions is the trademark of the manufacturer Talladium España S.L. The information included in this catalogue is exclusively addressed to professionals in dental sector.

All commercial trademarks mentioned herein are fully registered by their respective companies, and the images that appear are just to provide an orientation. Talladium reserves the right to modify this document without previous notice. Talladium is not responsible for the inadequate execution of these products if the warning indications corresponding to every reference are not contemplated.

Ask about the products available with CE legislation. Some of the products are not authorized for sale and distribution or do not have a sales license in some countries according to other legislations. Information: das@dynamicabutment.com.



INDEX

8	LIST OF COMPATIBILITIES AVAILABLE
9	COMPATIBILITIES AVAILABLE
24	COMPATIBILITIES AND REFERENCES
168	DAS LIBRARIES
170	MULTI-UNIT DAS LIBRARIES
172	DYNAMIC SCREWS TECHNICAL SPECIFICATIONS
176	STRAIGHT SCREWS TECHNICAL SPECIFICATIONS
180	SCREWDRIVERS AND STRAIGHT SCREWS
181	DYNAMIC MILLING TOOL SPECIFICATIONS
185	SCREWDRIVERS AND COMPLEMENTS
186	DAS MU SYSTEM COMPONENTS

MULTI-UNIT
DAS SYSTEM

DYNAMIC
DAS SYSTEM

LIST OF COMPATIBILITIES AVAILABLE

AB	BIOTEC	EASY IMPLANT	JDENTALCARE	NOVA IMPLANTS	STRAUMANN
ACE	BIOTEM	ECKERMANN	KEYSTONE	OSSTEM IMPLANT	SURCAM DENTAL
ADIN	BREDENT MEDICAL	ELITE MEDICA	KLOCKNER	OSTEOPLUS	SYBRON IMPLANT SOLUTIONS
ALFA-GATE	BTI	EUROTEKNIKA	KUWOTECH	OXY	SYSTHEX
ALPHABIO	BTK	F&B IMPLANT (FIT & BRILLIANT)	LASAK	PALTOP	TBR
ALPHA-DENT	CAMLOG	GALIMPLANT	LEADER	PHIBO	TITANIUM-FIX
ANCLADEN	CONEXÃO SISTEMA DE PRÓTESE	GC TECH	MEDENTIKA	POINT IMPLANT	TREE-OSS
ANKYLOS	CORTEX	GMI (ILERIMPLANT)	MEDENTIS	PROCLINIC	TRI DENTAL IMPLANTS
ANTHOGYR	COWELLMEDI	GT MEDICAL	MEGAGEN	PROTEG IMPLANTS	TRINON
ARDS	C-TECH	HAHN IMPLANT (GLIDEWELL)	MICRODENT	RADHEX	UFIT
ASTRA	DENTAL TECH	HIOSSSEN	MIS	REFLECT	VULKAN IMPLANTS
AVINENT	DENTAURUM	HI-TEC	MONOIMPLANT	RITTER	WARANTEC (ONEPLANT)
B&W	DENTEGRIS	IBS	MOZO-GRAU (TICARE)	ROOTT	WIN
BEGO	DENTEM	IDO IMPLANTS	MPI	SEWON MEDIX	XIVE
BIOCONCEPT	DENTIS	IHDE DENTAL (IMBIODENT)	NEOBIOTECH	SIC INVENT	YES IMPLANT
BIOGENESIS	DENTIUM	IMPLANT DIRECT	NEODENT	SIGNO VINCES	ZIACOM
BIOHORIZONS	DIO IMPLANTS	IMPLANT GENESIS	NEOSS	SIN IMPLANTS	ZIMMER
BIOLOK	DITRON	IMPLANTSWISS	NOBEL BIO CARE	SOUTHERN IMPLANTS	
BIOMET 3i	DMI DENTAL SUPPLY	INTRA-LOCK	NORIS MEDICAL	STERI-OSS	
BIONER	DSP BIOMEDICAL		NORMON	STERNGOLD	

COMPATIBILITIES AVAILABLE

AB

Model: l2
Implant Ø: 3.5/3.75/4.2/4.5/
Platform: Standard
Code: 0040

Model: l2
Implant Ø: 5/6
Platform: Standard
Code: 0040

Model: l22
Implant Ø: 3.75/4.22
Platform: Standard
Code: 0040

Model: l5
Implant Ø: 3.5/3.75/4.2/4.5/
Platform: Standard
Code: 0040

Model: l5
Implant Ø: 5/6/7/8
Platform: Standard
Code: 0040

Model: l55
Implant Ø: 3.75/4.2/4.5
Platform: Standard
Code: 0040

Model: l55
Implant Ø: 5/6/7/8
Platform: Standard
Code: 0040

Model: l10
Implant Ø: 4.2/5
Platform: Standard
Code: 0040

Model: l15
Implant Ø: 6/7/8
Platform: Standard
Code: 0040

Model: Multi Unit D1-P64
Implant Ø: Multi Unit D1-P64
Platform: Universal
Code: 0025

ACE

Model: External Hex
Implant Ø: 3.3
Platform: NP 3.5
Code: 0023

Model: External Hex
Implant Ø: 3.75/4
Platform: RP 4.1
Code: 0024

Model: External Hex
Implant Ø: 4.75
Platform: WP 5
Code: 0058

Model: Infinity TRI-CAM
Implant Ø: 3.5
Platform: 3.5
Code: 0026

Model: Infinity TRI-CAM
Implant Ø: 4.3
Platform: 4.3
Code: 0027

Model: Infinity TRI-CAM
Implant Ø: 5
Platform: 5
Code: 0028

Model: Infinity Internal Hex
Implant Ø: 3.7/4.1
Platform: 3.5
Code: 0040

Model: Infinity Internal Hex
Implant Ø: 4.7/5.1
Platform: 4.5
Code: 0041

Model: Infinity Octagon
Implant Ø: 3.3
Platform: RP 4.8
Code: 0037

Model: Infinity Octagon
Implant Ø: 4.1
Platform: RP 4.8
Code: 0037

Model: Infinity Octagon
Implant Ø: 4.8
Platform: RP 4.8
Code: 0037

Model: Infinity Octagon
Implant Ø: 4.8
Platform: WP 6.5
Code: 0096

Model: Multi Unit
Implant Ø: Universal
Platform: Universal
Code: 0025

ADIN

Model: Swell
Implant Ø: 3.3
Platform: 3.45
Code: 0040

Model: Swell
Implant Ø: 3.3
Platform: 3.45
Code: 0042

Model: Swell
Implant Ø: 3.75/4.2
Platform: 3.6
Code: 0040

Model: Swell
Implant Ø: 3.75/4.2
Platform: 3.6
Code: 0042

Model: Swell
Implant Ø: 5
Platform: 4
Code: 0040

Model: Swell
Implant Ø: 5
Platform: 4
Code: 0042

Model: Swell
Implant Ø: 6
Platform: 4.6
Code: 0040

Model: Swell
Implant Ø: 6
Platform: 4.6
Code: 0042

Model: Touareg-S / Touareg-OS
Implant Ø: 3.5
Platform: 3.45
Code: 0040

Model: Touareg-S / Touareg-OS
Implant Ø: 3.5
Platform: 3.45
Code: 0042

Model: Touareg-S / Touareg-OS
Implant Ø: 3.75/4.2
Platform: 3.6
Code: 0040

Model: Touareg-S / Touareg-OS
Implant Ø: 3.75/4.2
Platform: 3.6
Code: 0042

Model: Touareg-S / Touareg-OS
Implant Ø: 5
Platform: 4
Code: 0040

Model: Touareg-S / Touareg-OS
Implant Ø: 5
Platform: 4
Code: 0042

Model: Touareg-S / Touareg-OS
Implant Ø: 6
Platform: 5
Code: 0040

Model: Touareg-S / Touareg-OS
Implant Ø: 6
Platform: 5
Code: 0042

Model: Touareg CloseFit
Implant Ø: 2.75
Platform: UNP
Code: 0188

Model: Touareg CloseFit
Implant Ø: 3
Platform: NP
Code: 0145

Model: Touareg CloseFit
Implant Ø: 3.5
Platform: RP
Code: 0021

Model: Touareg CloseFit
Implant Ø: 4.3/5
Platform: WP
Code: 0022

Model: Triple
Implant Ø: 3.5/3.75/4.2/5/6
Platform: Standard
Code: 0040

Model: Triple
Implant Ø: 3.5/3.75/4.2/5/6
Platform: Standard
Code: 0042

Model: Multi Unit TMA
Implant Ø: Universal
Platform: Universal
Code: 0025

ALFA-GATE

Model: Bioactive/Porous/Trio/MAX
Implant Ø: 3.3/3.75/4.2/4.7/5.2/6
Platform: SP
Code: 0040

Model: Conical
Implant Ø: 3.5
Platform: NP
Code: 0021

Model: Conical
Implant Ø: 4.3/5
Platform: RP
Code: 0022

ALPHABIO

Model: Internal Hex Connection (IH) SPI
Implant Ø: 3.3/3.75/4.2/5/6
Platform: Universal
Code: 0040

Model: Internal Hex Connection (IH) SPI
Implant Ø: 3.3/3.75/4.2/4.65/5.3
Platform: Universal
Code: 0040

Model: Internal Hex Connection (IH) ICE
Implant Ø: 3.3/3.75/4.2/5
Platform: Universal
Code: 0040

Model: Internal Hex Connection (IH) ICE
Implant Ø: 3.3/3.75/4.2/5/6
Platform: Universal
Code: 0040

Model: Internal Hex Connection
(IH) DFI
Implant Ø: 3.75/4.2/5
Platform: 3.5
Code: 0040

Model: Conical Hex Connection (CHC)
NICE
Implant Ø: 3.2
Platform: Narrow
Code: 0136

Model: Conical Hex Connection (CHC)
NICE
Implant Ø: 3.2/3.5
Platform: Narrow
Code: 0136

Model: Conical Standard Connection
(CS)
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0169

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0195

COMPATIBILITIES AVAILABLE

ALPHA-DENT

Model: Classic Conus
Implant Ø: 3.3/3.75
Platform: 3
Code: 0265

Model: Active Conus
Implant Ø: 3.25/3.75
Platform: 3
Code: 0265

ANCLADEN

Model: Anclalock
Implant Ø: 3.75/4.25/5
Platform: 3.5
Code: 0040

ANKYLOS

Model: Ankylos
Implant Ø: 3.5
Platform: 3.5
Code: 0075

Model: Ankylos
Implant Ø: 4.5
Platform: 4.5
Code: 0075

Model: Ankylos
Implant Ø: 5.5
Platform: 5.5
Code: 0075

Model: Ankylos
Implant Ø: 7
Platform: 7
Code: 0075

Model: Balance Base Narrow
Implant Ø: Universal
Platform: Universal
Code: 0183

ANTHOGYR

Model: Axiom BL REG / PX
Implant Ø: 3.4
Platform: 3.4
Code: 0161

Model: Axiom BL REG / PX
Implant Ø: 4
Platform: 4
Code: 0149

Model: Axiom BL REG / PX
Implant Ø: 4.6
Platform: 4.6
Code: 0149

Model: Axiom BL REG / PX
Implant Ø: 5.2
Platform: 5.2
Code: 0162

Model: Anthofit HE
Implant Ø: 3.5/3.75/4
Platform: R (4.1)
Code: 0024

Model: Anthofit HE
Implant Ø: 5
Platform: L (5)
Code: 0058

Model: Ossfit
Implant Ø: 3.5/4.2
Platform: 4.8
Code: 0074

Model: Ossfit
Implant Ø: 3.5/4.2
Platform: 4.8
Code: 0037

Model: Ossfit
Implant Ø: 5
Platform: 6.5
Code: 0096

Model: Multi Unit
Implant Ø: 4.8
Platform: Universal
Code: 0163

ARDS

Model: Smart
Implant Ø: 3.75/4.2/4.5
Platform: 3.75
Code: 0040

Model: Classic
Implant Ø: 3.3/3.75/4.2/5/6
Platform: 3.75
Code: 0040

Model: Premium
Implant Ø: 3.3/3.75/4.2/5/6
Platform: 3.75
Code: 0040

Model: CIT
Implant Ø: 3.3/3.75/4.2/5/6
Platform: 3.75
Code: 0040

ASTRA

Model: Yellow
Implant Ø: 3
Platform: Yellow (X-estrecha)
Code: 0109

Model: Aqua
Implant Ø: 3.5/4
Platform: Aqua(Estrecha)
Code: 0004

Model: Lilac
Implant Ø: 4.5/5
Platform: Lilac (Ancha)
Code: 0005

Model: Uniabutment Cono 200
Implant Ø: Regular/Wide
Platform: Regular/Wide
Code: 0066

Model: Evolution (Interno)
Implant Ø: 3
Platform: 3
Code: 0090

Model: Evolution (Interno)
Implant Ø: 3.6
Platform: 3.6
Code: 0006

Model: Evolution (Interno)
Implant Ø: 4.2
Platform: 4.2
Code: 0007

Model: Evolution (Interno)
Implant Ø: 4.8
Platform: 4.8
Code: 0091

Model: Evolution (Interno)
Implant Ø: 5.4
Platform: 5.4
Code: 0092

Model: Evolution
(Cono externo 33°)
Implant Ø:
Platform: Universal
Code: 0008

Model: Multibase Abutment
(SmartFix concept)
Implant Ø:
Platform: Universal
Code: 0258

Model: DS OmniTaper EV
Implant Ø: 3
Platform: XS
Code: 0090

Model: DS OmniTaper EV
Implant Ø: 3.4
Platform: S
Code: 0006

Model: DS OmniTaper EV
Implant Ø: 3.8
Platform: M
Code: 0007

Model: DS OmniTaper EV
Implant Ø: 4.5
Platform: L
Code: 0091

Model: DS OmniTaper EV
Implant Ø: 5.5
Platform: XL
Code: 0092

AVINENT

Model: HE/EC
Implant Ø: 3.3//3.5/4
Platform: 3.5
Code: 0023

Model: HE/EC
Implant Ø:
3.3/3.8/4/4.2/4.8//4.5/5
Platform: 4.1
Code: 0024

Model: HE/EC
Implant Ø: 4.8
Platform: 5.1
Code: 0061

Model: HI/IC
Implant Ø: 3.1//3.5/4
Platform: 3.5
Code: 0040_B

Model: HI/IC
Implant Ø:
3.3/3.8/4/4.2/4.8//4.5/5
Platform: 4.1
Code: 0040_B

Model: Transepitelial
Implant Ø:
Platform: Regular
Code: 0025

B&W

Model: Hexágono Externo
Implant Ø: 3.75/4
Platform: 4.1
Code: 0024

Model: Hexágono Externo
Implant Ø: 5
Platform: 5
Code: 0058

Model: Cónico Hexagono
Interno CIH
Implant Ø: 3.3/4
Platform: 4
Code: 0040

Model: Cónico Hexagono
Interno CIH
Implant Ø: 3.3/4
Platform: 4
Code: 0042

BEGO

Model: RS/RSX
Implant Ø: 3.0
Platform: 3.0
Code: 0049

Model: S/RI/RS/RSX
Implant Ø: 3.25/3.75
Platform: 3.67
Code: 0050

Model: S/RI/RS/RSX
Implant Ø: 4.1
Platform: 4.1
Code: 0051

Model: S/RI/RS/RSX
Implant Ø: 4.5
Platform: 4.5
Code: 0052

Model: S/RI/RS/RSX
Implant Ø: 5.5
Platform: 5.5
Code: 0081

Model: Mini
Implant Ø: 2.7/2.9/3.1
Platform: Mini
Code: 0187

Model: MultiPlus
Implant Ø:
Platform: Universal
Code: 0150

BIOCONCEPT

Model: BC Tissue Level Standard
Implant Ø: 3.3/4.1/4.8
Platform: Regular
Code: 0037

COMPATIBILITIES AVAILABLE

Model: BV Tapered Bone Level
Implant Ø: 3.5
Platform: Narrow
Code: 0029

Model: BV Tapered Bone Level
Implant Ø: 4/4.5/5
Platform: Regular
Code: 0030

Model: BC Bone Level
Implant Ø: 4.1/4.8
Platform: Regular
Code: 0035

Model: BC Tissue Level Standard Plus
Implant Ø: 4.8
Platform: Regular
Code: 0037

Model: BC Tissue Level Tapered Effect
Implant Ø: 4.8
Platform: Regular
Code: 0037

Model: BC Bone Level
Implant Ø: 3.3
Platform: Narrow
Code: 0033

BIOGENESIS

Model: 3icon
Implant Ø: 3.3
Platform: Mini (Pink)
Code: 0023

Model: 3icon
Implant Ø: 3.75/4/4.3/4.5
Platform: Regular (Blue)
Code: 0024

Model: 3icon
Implant Ø: 5/5.5
Platform: Wide (Yellow)
Code: 0058

Model: Aticon
Implant Ø: 3.5/4/4.5/5
Platform: Blue
Code: 0005

Model: Iticon
Implant Ø: 3.5/4.1/4.8
Platform: 4.8
Code: 0037

BIOHORIZONS

Model: External
Implant Ø: 3.5
Platform: 3.7 (Yellow)
Code: 0023

Model: Tapered Internal
Implant Ø: 3/3.4
Platform: 3 (Grey)
Code: 0102

Model: Tapered Internal
Implant Ø: 3.8
Platform: 3.5 (Yellow)
Code: 0040

Model: Tapered Internal
Implant Ø: 4.6
Platform: 4.5 (Green)
Code: 0041

Model: Tapered Internal
Implant Ø: 5.8
Platform: 5.7 (Blue)
Code: 0080

Model: Tapered Plus
Implant Ø: 3.8
Platform: 3 (Grey)
Code: 0102

Model: Tapered Plus
Implant Ø: 4.6
Platform: 3.5 (Yellow)
Code: 0040

Model: Tapered Plus
Implant Ø: 5.8
Platform: 4.5 (Green)
Code: 0041

Model: Tapered Pro Conical
Implant Ø: 3.3/3.8
Platform: Narrow (Grey)
Code: 0119

Model: Tapered Pro Conical
Implant Ø: 4.2/4.6/5.2
Platform: Regular (Yellow)
Code: 0120

Model: Mount-free
Tapered Internal
Implant Ø: 3/3.4
Platform: 3 (Grey)
Code: 0102

Model: Mount-free
Tapered Internal
Implant Ø: 3.8
Platform: 3.5 (Yellow)
Code: 0040

Model: Mount-free
Tapered Internal
Implant Ø: 4.6
Platform: 4.5 (Green)
Code: 0041

Model: Mount-free
Tapered Internal
Implant Ø: 5.8
Platform: 5.7 (Blue)
Code: 0080

Model: Tapered Pro
Implant Ø: 3.8
Platform: 3 (Grey)
Code: 0102

Model: Tapered Pro
Implant Ø: 4.2/4.6
Platform: 3.5 (Yellow)
Code: 0040

Model: Tapered Pro
Implant Ø: 5.2
Platform: 4.5 (Green)
Code: 0041

Model: Tapered Short
Implant Ø: 4.6
Platform: 3.5 (Yellow)
Code: 0040

Model: Tapered Short
Implant Ø: 5.8
Platform: 4.5 (Green)
Code: 0041

Model: Tapered PTG
Implant Ø: 4.2
Platform: 3.5 (Yellow)
Code: 0040

Model: Tapered IM
(Immediate Molar)
Implant Ø: 7/8
Platform: 5.7 (Blue)
Code: 0080

Model: Tapered Tissue Level
Implant Ø: 3/3.8
Platform: 3.5 (Yellow)
Code: 0040

Model: Tapered Tissue Level
Implant Ø: 4.6
Platform: 4.5 (Green)
Code: 0041

Model: Tapered Tissue Level
Implant Ø: 5.8
Platform: 5.7 (Blue)
Code: 0080

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0025

BIOLOK

Model: Hexágono Externo
Implant Ø: 3.45
Platform: 3.45
Code: 0003

BIOMET 3i

Model: Osseotite External Hex
Implant Ø: 3.25
Platform: 3.4
Code: 0003

Model: Osseotite External Hex
Implant Ø: 3.75/4
Platform: 4.1
Code: 0024

Model: Osseotite External Hex
Implant Ø: 5
Platform: 5
Code: 0058

Model: Certain
Implant Ø: 3.25/4
Platform: 3.4
Code: 0001

Model: Certain
Implant Ø: 4/5
Platform: 4.1
Code: 0002

Model: Certain
Implant Ø: 5
Platform: 5
Code: 0057

Model: Low Profile
Implant Ø:
Platform: Universal
Code: 0025

BIONER

Model: Ikelt / Bikelt
Implant Ø: 3.3/3.75/4
Platform: 4.1
Code: 0024

Model: Ikelt
Implant Ø: 5
Platform: 5
Code: 0058

Model: Hikelt
Implant Ø: 4.2
Platform: 3.95
Code: 0040

Model: Hikelt
Implant Ø: 4.7
Platform: 4.9
Code: 0041

Model: TopDM
Implant Ø: 3.5
Platform: 3.5
Code: 0021

Model: TopDM
Implant Ø: 4
Platform: 4
Code: 0021

Model: TopDM
Implant Ø: 5
Platform: 5
Code: 0021

Model: Short DM
Implant Ø: 4/5/6
Platform: Universal
Code: 0021

Model: Hibikelt
Implant Ø: 4/5
Platform: Universal
Code: 0021

Model: Transepitelial A-5M
Implant Ø: Transepitelial A-5M
Platform: Regular
Code: 0025

BIOTEC

Model: SPR/CIM
Implant Ø: 3.3
Platform: 3.3
Code: 0040

Model: SPR/CIM
Implant Ø: 3.75
Platform: 3.75
Code: 0040

Model: SPR/SPTT/CIM
Implant Ø: 4.2
Platform: 4.2
Code: 0040

Model: SPR/SPTT/CIM
Implant Ø: 5
Platform: 5
Code: 0040

COMPATIBILITIES AVAILABLE

BIOTEM

Model: AR Fixture
Implant Ø: 3,7/4/4,5
Platform: Regular
Code: 0030

BREDENT MEDICAL

Model: Narrow Sky
Implant Ø: 3,5
Platform: NP 3,5
Code: 0110

Model: Blue Sky
Implant Ø: 3,5/4/4,5/5,5
Platform: 4
Code: 0111

Model: Blue Sky Classic
Implant Ø: 3,5/4/4,5
Platform: 4
Code: 0111

Model: Copa Sky
Implant Ø: 3,5/4/4,5/5/6
Platform: 3,3
Code: 0251

BTI

Model: Externa Tiny
Implant Ø: 2,5/3/3,3/3,5/3,75
Platform: Tiny 3,5
Code: 0009

Model: Externa Universal
Implant Ø: 3,75/4
Platform: Universal 4,1
Code: 0024

Model: Externa Universal Plus
Implant Ø: 4,5/5
Platform: Universal Plus 4,1
Code: 0024

Model: Externa
Implant Ø: 4,5/5/5,5
Platform: Ancha 5,5
Code: 0060

Model: Interna
Implant Ø: 3,3/3,5/3,75
Platform: 3,5
Code: 0257

Model: Interna Universal
Implant Ø: 3,3/3,5/3,75/4/4,25
Platform: Universal 4,1
Code: 0010

Model: Interna Universal Plus
Implant Ø: 4,5/5/5,5
Platform: Universal Plus 4,1
Code: 0010

Model: Interna Ancha
Implant Ø: 5,5/6/6,25
Platform: Ancha 5,5
Code: 0059

Model: Multi-IM
Implant Ø: converter 4,1
Platform: Universal 4,1
Code: 0151

Model: Multi-IM
Implant Ø: converter 5,5
Platform: Ancha 5,5
Code: 0177

BTK

Model: Klassic / Konic
Implant Ø: 3,25
Platform: 3,4 EN
Code: 0003

Model: Klassic / Konic/Line Plus
Implant Ø: 3,25PL/3,75/4
Platform: 4,1 ER
Code: 0024

Model: IS +/Line Plus IS+
Implant Ø: 3,3/3,7/4,1/4,8/6
Platform: DR
Code: 0029

Model: Klassic / Konic
Implant Ø: 3,3/3,7/4,1/4,8
Platform: KR
Code: 0029

Model: Klassic / Konic
Implant Ø: 3,25/4
Platform: 3,5 IR
Code: 0040

Model: Line Plus IC+
Implant Ø: 3,25/3,75/4,25/5
Platform: LR
Code: 0040

Model: Klassic / Konic
Implant Ø: 3,25/4
Platform: 3,5 IR
Code: 0042

CAMLOG

Model: Camlog Screw-Line/
Progressive-Line
Implant Ø: 3,3
Platform: 3,3
Code: 0087

Model: Camlog Screw-Line/
Progressive-Line
Implant Ø: 3,8
Platform: 3,8
Code: 0011

Model: Camlog Screw-Line/
Progressive-Line
Implant Ø: 4,3
Platform: 4,3
Code: 0012

Model: Camlog Screw-Line/
Progressive-Line
Implant Ø: 5
Platform: 5
Code: 0088

Model: Conelog Screw-Line/
Progressive-Line
Implant Ø: 3,3
Platform: 3,3
Code: 0119

Model: Conelog Screw-Line/
Progressive-Line
Implant Ø: 3,8
Platform: 3,8
Code: 0120

Model: Conelog Screw-Line/
Progressive-Line
Implant Ø: 4,3
Platform: 4,3
Code: 0121

CONEXÃO SISTEMA DE PRÓTESE

Model: NP 24° Flesh Gold
Implant Ø: 3,5/3,75/4,3/5
Platform: Universal
Code: 0021

Model: NP 24° Flash
Implant Ø: 3,5/4,3/5
Platform: Universal
Code: 0021

Model: NP 24° Pterytrans EX
Implant Ø: 3,5
Platform: Universal
Code: 0021

Model: NP 24° Short® NP BLT
Implant Ø: 3,75/4,3
Platform: Universal
Code: 0021

Model: NP 24° Torq
Implant Ø: 3,5/3,75/4
Platform: Universal
Code: 0021

Model: NP 24° Expand
Implant Ø: 3,75/4,5
Platform: Universal
Code: 0021

CORTEX

Model: Internal Hex Dynamix
Implant Ø: 3,3/3,8/4,2/5/6
Platform: 3,75
Code: 0040

Model: Internal Hex Classix
Implant Ø: 3,3/3,8/4,2/5/6
Platform: 3,75
Code: 0040

Model: Internal Hex Saturn
Implant Ø: 3,8/4,2
Platform: 3,5
Code: 0040

Model: Conical Dynamix
Implant Ø: 3
Platform: NP
Code: 0109

Model: Conical Dynamix
Implant Ø: 3,3/3,8/4,2
Platform: RP
Code: 0004

Model: Conical Dynamix
Implant Ø: 5/6
Platform: WP
Code: 0005

Model: Conical Classix
Implant Ø: 3,3/3,8/4,2
Platform: RP
Code: 0004

Model: Conical Classix
Implant Ø: 5/6
Platform: WP
Code: 0005

Model: Conical Magix
Implant Ø: 3,3/3,8/4,2
Platform: RP
Code: 0004

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0025

COWELLMEDI

Model: Inno - External Type
Implant Ø: 5,0/6,0
Platform: 5,1
Code: 0061

Model: Multi S&A Abutment Ø 4,5 mm
Implant Ø: Multi S Abutment
Platform: Universal
Code: 0193

C-TECH

Model: EL Esthetic Line
Implant Ø: 3,8/4,3/5,1
Platform: 4
Code: 0246

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0245

DENTAL TECH

Model: Implagic
Implant Ø: 4,5
Platform: 4,5 (Blue)
Code: 0041

DENTAURUM

Model: Tiologic
Implant Ø: 3,3
Platform: Small
Code: 0130

Model: Tiologic
Implant Ø: 3,7/4,2
Platform: Medium
Code: 0131

Model: Tiologic
Implant Ø: 4,8/5,5
Platform: Large
Code: 0132

DENTEGRIS

Model: SLS-Straight
Implant Ø: 4,5
Platform: 4,5
Code: 0041_B

Model: Sinus-Lift
Implant Ø: 4,5
Platform: 4,5
Code: 0041_B

COMPATIBILITIES AVAILABLE

Model: S&T Implants
Implant Ø: 4.5
Platform: 4.5
Code: 0041_B

DENTEM

Model: Regular
Implant Ø:
Platform: Regular
Code: 0030

DENTIS

Model: OneQ-SL
Implant Ø: 3
Platform: Narrow
Code: 0014

Model: OneQ-SL
Implant Ø: 3.9/4.2/4.7/5.2
Platform: Regular
Code: 0030

Model: OneQ-SL
Implant Ø: 6/7/8
Platform: Wide
Code: 0030

Model: s-Clean Tapered /
Tapered II
Implant Ø: 3.7
Platform: Mini
Code: 0030

Model: s-Clean Tapered /
Tapered II
Implant Ø: 4.1/4.3
Platform: Regular
Code: 0030

Model: s-Clean Tapered /
Tapered II
Implant Ø: 4.8
Platform: Wide
Code: 0030

Model: s-Clean Straight
Implant Ø: 4.1/4.8
Platform: 4.1/4.8
Code: 0030

Model: s-Clean Save
Implant Ø: 5.5/6
Platform: 5.5/6
Code: 0030

Model: SQ-SL
Implant Ø: 3.5
Platform: Narrow
Code: 0014

Model: SQ-SL
Implant Ø: 4/4.5/5
Platform: Regular
Code: 0030

Model: SQ-SL
Implant Ø: 6/7/8
Platform: Wide
Code: 0030

Model: e-Clean
Implant Ø: 3.5
Platform: Mini
Code: 0023

Model: e-Clean
Implant Ø: 4.1
Platform: Regular
Code: 0024

Model: e-Clean
Implant Ø: 5.1
Platform: Wide
Code: 0061

Model: i-Clean Tapered
Implant Ø: 3.7
Platform: Mini
Code: 0037

Model: i-Clean Tapered
Implant Ø: 4.1/4.3
Platform: Regular
Code: 0037

Model: i-Clean Tapered
Implant Ø: 4.8
Platform: Wide
Code: 0037

Model: i-Clean Straight
Implant Ø: 4.1/4.8
Platform: 4.8
Code: 0037

Model: Octa Abutment
Implant Ø: Universal
Platform: Universal
Code: 0074

DENTIUM

Model: NR Line
Implant Ø: 3.1
Platform: 3.2
Code: 0190

Model: NR Line
Implant Ø: 3.1
Platform: 3.6
Code: 0190

Model: NR Line
Implant Ø: 3.6
Platform: 3.6
Code: 0191

Model: NR Line
Implant Ø: 4.3
Platform: 4.3
Code: 0191

Model: NR Line
Implant Ø: 5
Platform: 5
Code: 0191

Model: NR Line
Implant Ø: 6
Platform: 6
Code: 0191

Model: Multi Unit NR Line
Implant Ø:
Platform: 5
Code: 0192

Model: SimpleLine II
Implant Ø: 3.8/4.3
Platform: 4.8
Code: 0074

Model: SimpleLine II
Implant Ø: 3.8/4.3
Platform: 4.8
Code: 0037

Model: SimpleLine II
Implant Ø: 4.3/4.8
Platform: 6.5
Code: 0096

Model: SuperLine/SuperLine II/
Implantium
Implant Ø: 3.4
Platform: 3.6
Code: 0030

Model: SuperLine/SuperLine II/
Implantium
Implant Ø: 3.8
Platform: 4
Code: 0030

Model: SuperLine/SuperLine II/
Implantium
Implant Ø: 4.3
Platform: 4.5
Code: 0030

Model: SuperLine/SuperLine II/
Implantium
Implant Ø: 4.8
Platform: 5
Code: 0030

Model: SuperLine/SuperLine II/
Implantium
Implant Ø: 4.8
Platform: 6
Code: 0030

Model: Multi Unit Superline and
Implantium
Implant Ø:
Platform: 4.5
Code: 0193

DIO IMPLANTS

Model: SM System
Implant Ø: 4.5/5/5.3
Platform: Regular/Wide
Code: 0013

Model: UF II Narrow
Implant Ø: 3/3.3
Platform: Narrow
Code: 0014

Model: UF II
Implant Ø: 3.8/4/4.5/5/5.5
Platform: Regular
Code: 0030

Model: External
Implant Ø: 3.3/3.8
Platform: Narrow 3.5
Code: 0023

Model: External
Implant Ø: 3.75/4/4.5
Platform: Regular 4.1
Code: 0024

Model: External
Implant Ø: 5/5.3/5.5/6
Platform: Wide 5.1
Code: 0061

Model: Internal OCTA
Implant Ø:
Platform: 4.8
Code: 0074

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0247

DITRON

Model: Ultimate Matrix
Implant Ø: 3.75/4.2
Platform: 3.75
Code: 0040

Model: Ultimate Matrix
Implant Ø: 5
Platform: 4
Code: 0040

Model: Ultimate Matrix
Implant Ø: 6
Platform: 4.6
Code: 0040

Model: MPI Matrix
Implant Ø: 3.5
Platform: 3.5
Code: 0040

Model: MPI Matrix
Implant Ø: 3.75
Platform: 3.75
Code: 0040

Model: MPI Matrix
Implant Ø: 4.2
Platform: 4.2
Code: 0040

Model: MPI Matrix
Implant Ø: 5
Platform: 5
Code: 0040

Model: MPI Matrix
Implant Ø: 6
Platform: 6
Code: 0040

DMI DENTAL SUPPLY

Model: DCI/DSI
Implant Ø: 3.3/3.5/3.75/4.2/5/6
Platform: 3.75
Code: 0040

DSP BIOMEDICAL

Model: Hexágono Externo
Implant Ø: 3.75/4/5//3.5/3.8/4.3
Platform: 4.1
Code: 0024

EASY IMPLANT

Model: Master C
Implant Ø: 3.5
Platform: 3.5 (Ocean)
Code: 0004

Model: Master C
Implant Ø: 4
Platform: 4 (Ocean)
Code: 0004

COMPATIBILITIES AVAILABLE

Model: Master C
Implant Ø: 4.5
Platform: 4.5 (Lilas)
Code: 0030

Model: Master C
Implant Ø: 5
Platform: 5 (Lilas)
Code: 0030

Model: Master S
Implant Ø: 3.3
Platform: 3.3 (Ocean)
Code: 0004

Model: Master S
Implant Ø: 3.75
Platform: 3.75 (Lilas)
Code: 0030

Model: Master S
Implant Ø: 4.25
Platform: 4.25 (Lilas)
Code: 0030

Model: Master S
Implant Ø: 4.75
Platform: 4.75 (Lilas)
Code: 0030

Model: Master L
Implant Ø: 3.3
Platform: 3.3 (Lilas)
Code: 0030

Model: Master L
Implant Ø: 3.75
Platform: 3.75 (Lilas)
Code: 0030

Model: Master L
Implant Ø: 4.25
Platform: 4.25 (Lilas)
Code: 0030

Model: Master L
Implant Ø: 4.75
Platform: 4.75 (Lilas)
Code: 0030

Model: MINI
Implant Ø: 3
Platform: 3
Code: 0176

Model: Hexcel-S
Implant Ø: 3.3
Platform: 3.3
Code: 0003

Model: Hexcel-S
Implant Ø: 3.75
Platform: 4.1
Code: 0024

Model: Hexcel-S
Implant Ø: 4.25
Platform: 4.1
Code: 0024

Model: Hexcel-S
Implant Ø: 4.75
Platform: 5
Code: 0058

Model: Multi Unit Conical
Abutment
Implant Ø:
Platform: Universal
Code: 0025

ECKERMANN

Model: All-Spiral
Implant Ø: 4
Platform: Regular
Code: 0069

Model: Duplo
Implant Ø: 4
Platform: Regular
Code: 0070

Model: Hexagon
Implant Ø: 3/3.5/4/4.5/5
Platform: 4.1
Code: 0024

Model: Winner
Implant Ø: 3/3.5/4
Platform: 3.5
Code: 0040_B

Model: Winner
Implant Ø: 3/3.5/4
Platform: 3.5
Code: 0042

Model: Winner
Implant Ø: 4/4.5/5
Platform: 4.5
Code: 0041_B

Model: Winner
Implant Ø: 4/4.5/5
Platform: 4.5
Code: 0043

ELITE MEDICA

Model: Conexión Externa
Implant Ø: 3.75
Platform: Narrow
Code: 0023

Model: Conexión Externa
Implant Ø: 4
Platform: Regular
Code: 0024

Model: Conexión Externa
Implant Ø: 5
Platform: Wide
Code: 0061

EUROTEKNIKA

Model: Naturactis
Implant Ø: 3.5
Platform: 3.4
Code: 0004

Model: Naturactis
Implant Ø: 4
Platform: 3.8
Code: 0004

Model: Naturactis
Implant Ø: 4.5
Platform: 4.3
Code: 0004

Model: Naturactis
Implant Ø: 5
Platform: 4.8
Code: 0004

Model: Uneva
Implant Ø: 3.6
Platform: 4.1
Code: 0024

Model: Uneva
Implant Ø: 4.1
Platform: 4.1
Code: 0024

Model: Uneva
(Platform Switching)
Implant Ø: 4.8
Platform: 4.1
Code: 0024

Model: Uneva
(Platform Switching)
Implant Ø: 6
Platform: 4.1
Code: 0024

Model: Natea
Implant Ø: 3.6/4.1/4.8
Platform: Narrow
Code: 0004

Model: Natea
Implant Ø: 3.6/4.1/4.8
Platform: Regular
Code: 0004

Model: Natea
Implant Ø: 6
Platform: Wide
Code: 0004

Model: Aesthetica
Implant Ø: 4.1
Platform: 4.8
Code: 0074

Model: Aesthetica
Implant Ø: 4.1
Platform: 4.8
Code: 0037

Model: Aesthetica
Implant Ø: 4.8
Platform: 6.5
Code: 0096

Model: Naturall
Implant Ø: 3.5
Platform: Narrow
Code: 0004

Model: Naturall
Implant Ø: 4/4.5
Platform: Regular
Code: 0004

Model: Naturall
Implant Ø: 5
Platform: Wide
Code: 0004

Model: Ibone E/Ibone S
Implant Ø: 3.8/4.3/4.8
Platform: 3.5
Code: 0004

Model: Ibone E/Ibone S
Implant Ø: 4.8/5.5/6.2
Platform: 4.3
Code: 0004

Model: Ibone G
Implant Ø: 4.8/5.5
Platform: RP
Code: 0037

Model: Ibone G
Implant Ø: 5.5/6.2
Platform: WP
Code: 0096

Model: Multi Unit Tetra
Implant Ø: Universal
Platform: Universal
Code: 0025

F&B IMPLANT (FIT & BRILLANT)

Model: FA Submerged Fixture
Implant Ø: 3.9
Platform: Narrow
Code: 0030

Model: FA Submerged Fixture
Implant Ø: 4.1/4.4
Platform: Regular
Code: 0030

Model: FA Submerged Fixture
Implant Ø: 4.8
Platform: Wide
Code: 0030

Model: FA Submerged Fixture
Implant Ø: 5.3/5.8/6.3/6.8
Platform: Ultra-Wide
Code: 0030

GALIMPLANT

Model: Conexión Externa
Implant Ø: 3.5/4
Platform: 4
Code: 0024

Model: Conexión Interna
Implant Ø: 3.5
Platform: 3.5
Code: 0004

Model: Conexión Interna
Implant Ø: 4
Platform: 4
Code: 0004

Model: Conexión Interna
Implant Ø: 5
Platform: 5
Code: 0004

Model: Pilar multi-posicion recto/
Pilar multi-posicion angulado
Implant Ø: Universal
Platform: Universal
Code: 0025

GC TECH

Model: AADVA Standard /
Tapered Implants
Implant Ø: 3.3
Platform: Narrow
Code: 0196

Model: AADVA Standard /
Tapered Implants
Implant Ø: 4
Platform: Regular
Code: 0197

Model: AADVA Standard /
Tapered Implants
Implant Ø: 5
Platform: Wide
Code: 0198

COMPATIBILITIES AVAILABLE

GMI (ILERIMPLANT)

Model: Phoenix
Implant Ø: 3.3/3.75/4
Platform: Standard 4.1
Code: 0024

Model: Phoenix
Implant Ø: 5
Platform: Wide 5.1
Code: 0061

Model: Frontier
Implant Ø: 3.3/3.75/4.25
Platform: RP 3.3
Code: 0042_B

Model: Frontier
Implant Ø: 4.75/5.75
Platform: WP 4.3
Code: 0041_B

Model: Universal
Implant Ø: Universal
Platform: PS-RP 4.8
Code: 0025

Model: Avantgard
Implant Ø: 3.75/4.25
Platform: RP
Code: 0243

GT MEDICAL

Model: Best Fit Octógono Interno
Implant Ø: 3.7/4.3/4.8
Platform: Regular
Code: 0074

Model: Best Fit Octógono Interno
Implant Ø: 3.7/4.3/4.8
Platform: Regular
Code: 0037

Model: Best Fit Hexágono Interno
Implant Ø: 3.7/4.1/4.3/4.8
Platform: Wide
Code: 0005

Model: Best Fit Hexágono Externo
Implant Ø: 3.5
Platform: Narrow
Code: 0023

Model: Best Fit Hexágono Externo
Implant Ø: 4.1
Platform: Regular
Code: 0024

Model: Best Fit Hexágono Externo
Implant Ø: 5.1
Platform: Wide
Code: 0061

HAHN IMPLANT (GLIDEWELL)

Model: Hahn Tapered Implant
Implant Ø: 3.5/4.3
Platform: 3.5/4.3
Code: 0021

Model: Hahn Tapered Implant
Implant Ø: 5
Platform: 5
Code: 0022

Model: Hahn Tapered Implant
Implant Ø: 7
Platform: 7
Code: 0124

Model: Multi-Unit Abutment system
Implant Ø: Universal
Platform: Universal
Code: 0025

Model: Hahn Tapered Implant
Implant Ø: 3
Platform: 3
Code: 0159

HIOSSEN

Model: ETIII SA / ETIII SA
Implant Ø: 3.5
Platform: Mini
Code: 0029

Model: ETIII SA / ETIII SA / ETIV SA
Implant Ø: 4/4.5/5
Platform: Regular
Code: 0030

Model: ETIII BA
Implant Ø: 3.5
Platform: Mini
Code: 0029

Model: ETIII BA
Implant Ø: 4/4.5/5
Platform: Regular
Code: 0030

HI-TEC

Model: Tapered Self Thread
Implant Ø: 3.3/3.75
Platform: 3.5
Code: 0040

Model: Tapered Self Thread
Implant Ø: 4.2/5
Platform: 4.5
Code: 0041

Model: Logic Plus
Implant Ø: 3.5
Platform: 3.7
Code: 0040

Model: Logic Plus
Implant Ø: 4.3
Platform: 3.9
Code: 0040

IBS

Model: Magic FC
Implant Ø: 4/4.5/5/5.5/6/6.5
Platform: 3.8
Code: 0030

Model: N.R. Fix
Implant Ø: 3/3.5
Platform: 3.8
Code: 0030

IDO IMPLANTS

Model: I Do Implant
Implant Ø: 3.8/4.4/5.5/5.5/6/7
Platform: Universal
Code: 0030

IHDE DENTAL (IMBIODENT)

Model: Bone Level Plus
Implant Ø: 3.3
Platform: 3.3
Code: 0033

Model: Bone Level Plus
Implant Ø: 4.1
Platform: 4.1
Code: 0035

Model: Bone Level Plus
Implant Ø: 4.8
Platform: 4.8
Code: 0035

IMPLANT DIRECT

Model: RePlus / Replant / Reactive
Implant Ø: 3.5/3.7/4.2
Platform: 3.5
Code: 0026

Model: RePlus / Replant / Reactive
Implant Ø: 4.3/4.7
Platform: 4.3
Code: 0027

Model: RePlus / Replant / Reactive
Implant Ø: 5/5.7
Platform: 5
Code: 0028

Model: Legacy
Implant Ø: 3.7/4.2
Platform: 3.5
Code: 0040

Model: Legacy
Implant Ø: 4.7/5.2
Platform: 4.5
Code: 0041

Model: Swishplant / Swishplus
Implant Ø: 4.1/4.8
Platform: 4.8
Code: 0074

Model: Swishplant / Swishplus
Implant Ø: 4.1/4.8
Platform: 4.8
Code: 0037

Model: Swishplant / Swishplus
Implant Ø: 4.8/5.7
Platform: 6.5
Code: 0096

Model: SwishActive
Implant Ø: 3.3
Platform: 3
Code: 0021

Model: SwishActive
Implant Ø: 4.1/4.8
Platform: 3.4
Code: 0022

Model: Interactive
Implant Ø: 3.2/3.7
Platform: 3
Code: 0021

Model: Interactive
Implant Ø: 4.3/5
Platform: 3.4
Code: 0022

Model: Simply Iconic
Implant Ø: 3.2/3.7/4.2
Platform: Purple 3.0
Code: 0021

Model: Simply Iconic
Implant Ø: 4.7/5.2/5.7
Platform: Gold 3.4
Code: 0022

Model: Multi Unit Abutment
Implant Ø:
Platform: 5
Code: 00158

IMPLANT GENESIS

Model: Aktiv System
Implant Ø: 3.5/3.75/4.2/5
Platform: Standard
Code: 0040

IMPLANTSWISS

Model: Bone Level
Implant Ø: 3.3
Platform: 3.3
Code: 0004

Model: Bone Level
Implant Ø: 3.7
Platform: 3.7
Code: 0030

Model: Bone Level
Implant Ø: 4.3
Platform: 4.3
Code: 0030

Model: Bone Level
Implant Ø: 4.8
Platform: 4.8
Code: 0030

Model: Bone Level
Implant Ø: 5.5
Platform: 5.5
Code: 0030

Model: Multi Unit Abutment
Implant Ø: Universal
Platform: 4.8
Code: 0025

INTRA-LOCK

Model: UniHex
Implant Ø: 4
Platform: Regular
Code: 0024

Model: UniHex
Implant Ø: 4.75
Platform: Wide
Code: 0024

COMPATIBILITIES AVAILABLE

Model: IntraHex
Implant Ø: 3.75/4
Platform: 3.5
Code: 0040

Model: IntraHex
Implant Ø: 4.75
Platform: 4.5
Code: 0041

JDENTALCARE

Model: JDEvolution/
JDEvolution Plus
Implant Ø: 3.7
Platform: 3.7
Code: 0040

Model: JDEvolution/
JDEvolution Plus
Implant Ø: 4.3/5
Platform: 4
Code: 0040

Model: JDEvolution/
JDEvolution Plus
Implant Ø: 6
Platform: 5
Code: 0040

Model: JD Pterygo
Implant Ø: 4
Platform: 4
Code: 0040

Model: JD ICON/JD ICON F
Implant Ø: 3.9
Platform: 3.9
Code: 0022

Model: JD ICON/JD ICON F
Implant Ø: 4.3
Platform: 4
Code: 0022

Model: JD ICON/JD ICON F
Implant Ø: 5
Platform: 4.7
Code: 0022

Model: JD ICON Plus
Implant Ø: 3.7
Platform: 3.7
Code: 0015

Model: JD ICON Plus
Implant Ø: 4.3
Platform: 4
Code: 0015

Model: JD ICON Plus
Implant Ø: 5
Platform: 4.8
Code: 0015

Model: JD ICON Plus T
Implant Ø: 3.5
Platform: 3.5
Code: 0015

Model: JD ICON Plus T
Implant Ø: 4
Platform: 3.5
Code: 0015

Model: JD ICON Plus T
Implant Ø: 4.5
Platform: 3.5
Code: 0015

Model: Conical Abutment
Implant Ø:
Platform: Universal
Code: 0025

KEYSTONE

Model: Restore
Implant Ø: 3.75/4
Platform: RD 4.1
Code: 0024

Model: Restore
Implant Ø: 5/6
Platform: WD 5
Code: 0061

Model: Internal TiLobe
PrimaConnex
Implant Ø: 3.3/3.5
Platform: 3.5
Code: 0044

Model: Internal TiLobe
PrimaConnex
Implant Ø: 4/4.1
Platform: 4.1
Code: 0045

Model: Internal TiLobe
PrimaConnex
Implant Ø: 5
Platform: 5
Code: 0046

Model: Internal TiLobe Prima Plus
Implant Ø: 3.5
Platform: 3.5
Code: 0044

Model: Internal TiLobe Prima Plus
Implant Ø: 4.1
Platform: 4.1
Code: 0045

Model: Internal TiLobe Prima Plus
Implant Ø: 5/6
Platform: 5
Code: 0046

KLOCKNER

Model: Essential Cone
Implant Ø: 3.5/4/4.5
Platform: 4.5
Code: 0054

Model: Essential Cone
Implant Ø: 4.8
Platform: 6
Code: 0071

Model: Essential Cone Pilar 25°
Implant Ø: 3.5/4/4.5
Platform: 4.5
Code: 0054

Model: Essential Cone
Octacone 12°
Implant Ø: 3.5/4/4.5
Platform: 4.5
Code: 0054

Model: KL
Implant Ø: 3.3
Platform: Narrow
Code: 0023

Model: KL
Implant Ø: 3.7/4.2
Platform: Regular
Code: 0024

Model: KL
Implant Ø: 4.7
Platform: Wide
Code: 0061

Model: Vega
Implant Ø: 3.5
Platform: NV
Code: 0082

Model: Vega
Implant Ø: 4/4.5
Platform: RV
Code: 0083

Model: Vega+
Implant Ø: 3.6
Platform: NV
Code: 0082

Model: Vega+
Implant Ø: 4.1/4.6
Platform: RV
Code: 0083

Model: Multi Unit Permanent
Implant Ø: 4.2
Platform: Universal
Code: 0173

KUWOTECH

Model: KISPLANT
Implant Ø: Cono Morse +
Hexágono Interno
Platform: 3.5
Code: 0030

Model: KISPLANT
Implant Ø: Cono Morse +
Hexágono Interno
Platform: 4/4.5/5/5.5/6
Code: 0030

LASAK

Model: Bioniq
Implant Ø: 2.9
Platform: QN (Amarillo)
Code: 0166

Model: Bioniq
Implant Ø: 3.5
Platform: 3.75 (Red)
Code: 0167

Model: Bioniq
Implant Ø: 4
Platform: QR (Azul)
Code: 0167

Model: Bioniq
Implant Ø: 5
Platform: QR (Azul)
Code: 0167

LEADER

Model: Tixos Internal Hex
Implant Ø: 3.3
Platform: 3.5
Code: 0040

Model: Tixos Internal Hex
Implant Ø: 3.75
Platform: 4
Code: 0040

Model: Tixos External Hex
Implant Ø: 3.3/3.75
Platform: 4.1
Code: 0024

Model: Tixos External Hex
Implant Ø: 5
Platform: 5
Code: 0058

MEDENTIKA

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0025

MEDENTIS

Model: Premium/Active Master
Implant Ø: 3.3
Platform: 3.3 (Pink)
Code: 0249

Model: Premium/Active Master
Implant Ø: 3.75
Platform: 3.75 (Red)
Code: 0125

Model: Premium/Active Master
Implant Ø: 4.1
Platform: 4.1 (Green)
Code: 0125

Model: Premium/Active Master
Implant Ø: 4.8
Platform: 4.8 (Blue)
Code: 0125

MEGAGEN

Model: AnyRidge
Implant Ø: 3.5
Platform: Small
Code: 0015

Model: AnyRidge
Implant Ø: 4/4.5
Platform: Regular
Code: 0015

Model: AnyRidge
Implant Ø: 5/5.5
Platform: Wide
Code: 0015

Model: AnyOne Internal
Implant Ø: 3.5/4/4.5/5/6/7
Platform: General
Code: 0030

Model: AnyOne External
Implant Ø: 3.5
Platform: Small 3.5
Code: 0023

COMPATIBILITIES AVAILABLE

Model: AnyOne External
Implant Ø: 4
Platform: Regular 4.1
Code: 0024

Model: AnyOne External
Implant Ø: 4.5
Platform: Regular 4.5
Code: 0024

Model: AnyOne External
Implant Ø: 5
Platform: Wide 5
Code: 0058

Model: AnyOne External
Implant Ø: 6
Platform: SuperWide 5.5
Code: 0058

Model: Cone Abutment
Implant Ø: Universal
Platform: 3.8
Code: 0128

Model: Cone Abutment
Implant Ø: Universal
Platform: 4.8
Code: 0074

Model: Mini Narrow Ridge
Implant Ø: 3/3.4
Platform: Mini
Code: 0014

Model: ExFeel
Implant Ø: 3.5
Platform: Small
Code: 0037

Model: ExFeel
Implant Ø: 4.1
Platform: Regular
Code: 0037

Model: ExFeel
Implant Ø: 4.8/5
Platform: Wide
Code: 0037

Model: Multi Unit N Type
Implant Ø: Multi Unit N Type
Platform: Universal
Code: 0025

Model: Multi Unit S Type
Implant Ø: Multi Unit S Type
Platform: Universal
Code: 0264

Model: Blue Diamond/BD Cuff
Implant Ø: 3.3/3.7
Platform: NC
Code: 0222

Model: Blue Diamond/BD Cuff
Implant Ø: 4.1/4.4/4.8/5.3/5.8/6.3
Platform: RC
Code: 0223

MICRODENT

Model: Universal
Implant Ø: 2.8/3.25
Platform: 3.5
Code: 0003

Model: Universal
Implant Ø: 3.3/3.5/3.75/4
Platform: 4.1
Code: 0024

Model: Universal
Implant Ø: 4.2/5
Platform: 5.1
Code: 0058

Model: System
Implant Ø: 2.8/3.25
Platform: 3.5
Code: 0003

Model: Ektos
Implant Ø: 3.7/4.2
Platform: 3.5
Code: 0040_B

MIS

Model: Lance
Implant Ø: 3.75/4.2
Platform: Standard
Code: 0024

Model: Lance
Implant Ø: 5
Platform: Wide
Code: 0058

Model: Multi-Unit
Implant Ø:
Platform: General
Code: 0020

Model: Seven
Implant Ø: 3.3
Platform: Narrow
Code: 0019

Model: Seven
Implant Ø: 3.75/4.2
Platform: Standard
Code: 0040

Model: Seven
Implant Ø: 5/6
Platform: Wide
Code: 0041

Model: M4
Implant Ø: 3.3
Platform: Narrow
Code: 0019

Model: M4
Implant Ø: 3.75/4.2
Platform: Standard
Code: 0040

Model: M4
Implant Ø: 5/6
Platform: Wide
Code: 0041

Model: C1
Implant Ø: 3.3
Platform: Narrow
Code: 0016

Model: C1
Implant Ø: 3.75/4.2
Platform: Standard
Code: 0017

Model: C1
Implant Ø: 5
Platform: Wide
Code: 0018

Model: V3
Implant Ø: 3.9/4.3/5
Platform: Standard
Code: 0017

MONOIMPLANT

Model: MonoImplant Multi Unit
Implant Ø: 3/3.7/4.1
Platform: 4.8
Code: 0025

MOZO-GRAU (TICARE)

Model: MG Osseous
Implant Ø: 3.3
Platform: 3.4 Mini
Code: 0003

Model: MG Osseous
Implant Ø: 3.4/3.75/4.25
Platform: 4.1 Standard
Code: 0024

Model: MG Osseous
Implant Ø: 5
Platform: 5 Maxi
Code: 0061

Model: MG Inhex
Implant Ø: 3.3
Platform: 2.3 Mini
Code: 0109

Model: MG Inhex
Implant Ø: 3.75/4.25
Platform: 2.8 Standard
Code: 0004

Model: MG Inhex
Implant Ø: 5
Platform: 3.8 Maxi
Code: 0005

MPI

Model: Conexión Externa HE
Privilege
Implant Ø: 3.3
Platform: 3.5
Code: 0009

Model: Conexión Externa HE
Privilege
Implant Ø: 3.3/4
Platform: 4.1
Code: 0024

Model: Conexión Externa HE
Privilege
Implant Ø: 5
Platform: 5
Code: 0058

Model: Privilege CM
Implant Ø: 3.5/4
Platform: Regular
Code: 0004

Model: Privilege CM
Implant Ø: 5
Platform: Wide
Code: 0005

Model: Excellence CM
Implant Ø: 3.5/4
Platform: Regular
Code: 0004

Model: Excellence CM
Implant Ø: 5
Platform: Wide
Code: 0005

NEOBIOTECH

Model: EB External System
Implant Ø: 3.5
Platform: Narrow
Code: 0023

Model: IS Implant System
Implant Ø: 3.2
Platform: S-Narrow
Code: 0029

Model: IS Implant System
Implant Ø: 3.5
Platform: Narrow
Code: 0030

Model: IS Implant System
Implant Ø: 4
Platform: Regular
Code: 0030

Model: IS Implant System
Implant Ø: 4.5
Platform: Regular
Code: 0030

Model: IS Implant System
Implant Ø: 5
Platform: Wide
Code: 0030

Model: IS Implant System
Implant Ø:
Platform: 4.8
Code: 0025

NEODENT

Model: Helix GM/Drive GM/
Titamax GM
Implant Ø: 3.5/3.75/4/4.3/5/6
Platform: Regular
Code: 0186

Model: Smart HE
Implant Ø: 3.75/4
Platform: 4.1
Code: 0024

Model: Helix HE
Implant Ø: 3.75/4/4.3
Platform: 4.1
Code: 0024

Model: Mini Pilar CM /
Mini Pilar Angulado CM
Implant Ø: Mini Pilar CM /
Mini Pilar Angulado CM
Platform: Universal
Code: 0025

COMPATIBILITIES AVAILABLE

NEOSS

Model: ProActive Straight/
Tapered/Edge
Implant Ø: 3.5 Green
Platform: Standard
Code: 0047

Model: ProActive Straight/
Tapered/Edge
Implant Ø: 4 Yellow
Platform: Standard
Code: 0047

Model: ProActive Straight/
Tapered/Edge
Implant Ø: 4.5 Blue
Platform: Standard
Code: 0048

Model: ProActive Straight/
Tapered/Edge
Implant Ø: 5 Peach
Platform: Standard
Code: 0048

Model: ProActive Straight/
Tapered/Edge
Implant Ø: 5.5 Lilac
Platform: Standard
Code: 0048

Model: ProActive Wide
Implant Ø: 6
Platform: Standard
Code: 0048

Model: ProActive Sinus
Implant Ø: 6.5
Platform: Standard
Code: 0048

Model: Short Implant
Implant Ø: 3.5/4/4.5
Platform: Standard
Code: 0047

Model: Short Implant
Implant Ø: 5/5.5/6/6.5
Platform: Standard
Code: 0048

NOBEL BIO CARE

Model: Branemark
Implant Ø: 3.3
Platform: Narrow
Code: 0023

Model: Branemark
Implant Ø: 3.75/4
Platform: Regular
Code: 0024

Model: Branemark
Implant Ø: 5/6
Platform: Wide
Code: 0061

Model: Replace
Implant Ø: 3.5
Platform: Narrow
Code: 0026

Model: Replace
Implant Ø: 4.3
Platform: Regular
Code: 0027

Model: Replace
Implant Ø: 5
Platform: Wide
Code: 0028

Model: Replace
Implant Ø: 6
Platform: Platform 6
Code: 0129

Model: Active/Replace
Conical Connection
Implant Ø: 3
Platform: Mini 3.0
Code: 0159

Model: Active/Replace
Conical Connection
Implant Ø: 3.5
Platform: Narrow
Code: 0021

Model: Active/Replace
Conical Connection
Implant Ø: 4.3/5
Platform: Regular
Code: 0022

Model: Active/Replace
Conical Connection
Implant Ø: 5.5
Platform: Wide
Code: 0124

Model: NobelSpeedy
Implant Ø: 3.3
Platform: Narrow
Code: 0023

Model: NobelSpeedy
Implant Ø: 4/5
Platform: Regular
Code: 0024

Model: NobelSpeedy
Implant Ø: 5/6
Platform: Wide
Code: 0061

Model: NobelParallel
Implant Ø: 3.75
Platform: Narrow
Code: 0021

Model: NobelParallel
Implant Ø: 4.3/5
Platform: Regular
Code: 0022

Model: NobelParallel
Implant Ø: 5.5
Platform: Wide
Code: 0124

NORIS MEDICAL

Model: Tuff
Implant Ø: 3.3/3.75/4.2/5/6
Platform: 3.75
Code: 0040

Model: Tuff TT
Implant Ø: 3.3/3.75/4.2/5/6
Platform: 3.75
Code: 0040

Model: Onix
Implant Ø: 3.3/3.75/4.2/5/6
Platform: 3.75
Code: 0040

Model: Cortical
Implant Ø: 4.0/5/6
Platform: 3.75
Code: 0040

Model: PteryCore
Implant Ø: 4.2
Platform: 3.75
Code: 0040

Model: PteryFit
Implant Ø: 4.2
Platform: 3.75
Code: 0040

NORMON

Model: Normoimplant HE
Implant Ø: 3.25/3.75/4.25/4.75
Platform: 4.1
Code: 0024

Model: Normoimplant HI
Implant Ø: 3.75/4.25/4.75
Platform: 3.5
Code: 0040_B

NOVA IMPLANTS

Model: PSI/PCI
Implant Ø: 3.3/3.75/4.2/5/6
Platform: 3.75
Code: 0040_B

OSSTEM IMPLANT

Model: TS
Implant Ø: 3
Platform: Mini 3.0
Code: 0029

Model: TS
Implant Ø: 3.5
Platform: Mini 3.5
Code: 0029

Model: TS
Implant Ø: 4/4.5/5/6/7
Platform: Regular
Code: 0030

Model: US
Implant Ø: 3.3/3.5
Platform: Mini 3.5
Code: 0023

Model: US
Implant Ø: 3.75/4/4.5
Platform: Regular 4.1
Code: 0024

Model: US
Implant Ø: 5/5.5
Platform: Wide 5.1
Code: 0061

Model: US
Implant Ø: 5/5.5
Platform: Wide PS 5
Code: 0058

Model: Multi Unit Abutment/
Esthetic Low abutment
Implant Ø: Universal
Platform: Mini/Regular
Code: 0025

OSTEOPLUS

Model: She
Implant Ø: 3.45
Platform: 3.45
Code: 0009

Model: She
Implant Ø: 3.75 / 4
Platform: 4
Code: 0024

Model: Shi
Implant Ø: 3.3 / 3.75 / 4.2
Platform: 3.5
Code: 0040

OXY

Model: K1 Line
Implant Ø: 3.5/4/4.5/5
Platform: Regular
Code: 0015

Model: K1 Line
Implant Ø: 5.5/6/6.5
Platform: Wide
Code: 0015

Model: PSK Line
Implant Ø: 3.5/4/4.5/5
Platform: Regular
Code: 0015

Model: MD Line KONE
Implant Ø: 3.75/4.25/5
Platform: Regular
Code: 0015

Model: MD Line Ext
Implant Ø: 3.75/4.25
Platform: Standard
Code: 0024

Model: Fixo
Implant Ø: Universal
Platform: 4.8
Code: 0024

PALTOP

Model: Advanced classic
Implant Ø: 3.25
Platform: Narrow (blue)
Code: 0029

Model: Advanced classic
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0040_B

Model: Advanced classic
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0042

Model: Advanced classic
Implant Ø: 6
Platform: Wide (purple)
Code: 0041

Model: Advanced +
Implant Ø: 3.25
Platform: Narrow (blue)
Code: 0029

COMPATIBILITIES AVAILABLE

Model: Advanced +
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0040_B

Model: Advanced +
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0042

Model: Advanced +
Implant Ø: 6
Platform: Wide (purple)
Code: 0041

Model: Dynamic
Implant Ø: 3.25
Platform: Narrow (blue)
Code: 0229

Model: Dynamic
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0040_B

Model: Dynamic
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0042

Model: Dynamic
Implant Ø: 6
Platform: Wide (purple)
Code: 0041

Model: PAI
Implant Ø: 3.25
Platform: Narrow (blue)
Code: 0229

Model: PAI
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0040_B

Model: PAI
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0042

Model: PAI
Implant Ø: 6
Platform: Wide (Purple)
Code: 0041

Model: DIVA/ACTIVE
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0040_B

Model: DIVA/ACTIVE
Implant Ø: 3.75/4.2/5
Platform: Standard
Code: 0042

Model: Conical Active
Implant Ø: 3.25/3.75/4.2/5
Platform: Standard
Code: 0029

Model: Universal Multi-Unit
Implant Ø: Multi-Unit
Platform: Standard
Code: 0181

PHIBO

Model: TSH/BNT Serie 3
Implant Ø: 3.6
Platform: 4
Code: 0024

Model: TSH/BNT Serie 4
Implant Ø: 4.2
Platform: 4
Code: 0024

Model: TSH/BNT Serie 5
Implant Ø: 4.8
Platform: 5
Code: 0060

POINT IMPLANT

Model: SM II System UV Implant
Implant Ø: 4/4.5/5
Platform: Regular
Code: 0030

PROCLINIC

Model: Cilindrico Externo
Implant Ø: 3.3
Platform: 3.3 Mini
Code: 0009

Model: Cilindrico Externo/
Cónico Externo
Implant Ø: 3.75/4.25//3.5/4
Platform: 4.1 Estandar
Code: 0024

Model: Cilindrico Externo/
Cónico Externo
Implant Ø: 5
Platform: 5 Maxi
Code: 0058

Model: Cilindrico Interno/
Cónico Interno
Implant Ø:
3.3/3.75/4.25/5/3.5/4/5
Platform: 3.5
Code: 0040

Model: SP Octa
Implant Ø: 3.3/4.1/4.8
Platform: 4.8
Code: 0074

Model: SP Octa
Implant Ø: 3.3/4.1/4.8
Platform: 4.8
Code: 0037

Model: SP Octa
Implant Ø: 4.8
Platform: 6.5
Code: 0096

Model: Aqua CM
Implant Ø: 3.5/4/5
Platform: 2.82
Code: 0004

PROTEG IMPLANTS

Model: PR01
Implant Ø: 3.3/3.75/4.2/5/6
Platform: Narrow
Code: 0265

RADHEX

Model: PHE
Implant Ø: 3.5
Platform: 3.5
Code: 0023

Model: PHE
Implant Ø: 4/4.5/5
Platform: 4.1
Code: 0024

Model: PHI
Implant Ø: 3.75
Platform: 3.5
Code: 0040_B

Model: PHI
Implant Ø: 4.5/5
Platform: 4.5
Code: 0041_B

REFLECT

Model: Rapid
Implant Ø: 3.0
Platform: 3.0
Code: 0159

Model: Rapid
Implant Ø: 3.5
Platform: NP
Code: 0021

RITTER

Model: SB/LA/QSI
Implant Ø: 3.75/4.2/5/6
Platform: Standard
Code: 0040_B

Model: Rapid
Implant Ø: 4.3/5/5.5
Platform: RP
Code: 0022

Model: Recover
Implant Ø: 3.5
Platform: NP
Code: 0021

Model: Recover
Implant Ø: 4.3/5
Platform: 3.5
Code: 0022

Model: Aspire
Implant Ø: 3.5/4
Platform: Aqua(Estrecha)
Code: 0004

Model: Aspire
Implant Ø: 5
Platform: Lilac (Ancha)
Code: 0005

Model: Tapered Screw
Implant Ø: 3.5
Platform: 3.5
Code: 0040_B

Model: Tapered Screw
Implant Ø: 4.1/4.7
Platform: 4.5
Code: 0041

ROOT

Model: R
Implant Ø: 3.5/3.8/4.2/4.8/5.5
Platform: Universal
Code: 0236

SEWON MEDIX

Model: IH2 SLA SYSTEM
Implant Ø: 3.5
Platform: Mini
Code: 0029

Model: IH2 SLA SYSTEM
Implant Ø: 3.5/4/4.5/5
Platform: Regular
Code: 0030

Model: IH2 RBM SYSTEM
Implant Ø: 3.5
Platform: Mini
Code: 0029

Model: IH2 RBM SYSTEM
Implant Ø: 3.5/4/4.5/5
Platform: Regular
Code: 0030

Model: IH SYSTEM
Implant Ø: 3.5/4/4.5/5
Platform: Universal
Code: 0025

SIC INVENT

Model: HEXAGONAL SYSTEM
SiCace
Implant Ø: 3.4/4
Platform: 3.3
Code: 0170

Model: HEXAGONAL SYSTEM
SiCace
Implant Ø: 4.5/5
Platform: 4.2
Code: 0171

Model: HEXAGONAL SYSTEM
SiCMax
Implant Ø: 3.4/4.2
Platform: 3.3
Code: 0170

Model: HEXAGONAL SYSTEM
SiCMax
Implant Ø: 4.7/5.2
Platform: 4.2
Code: 0171

Model: HEXAGONAL SYSTEM
SiCtapered
Implant Ø: 3.4/4.2
Platform: 3.3
Code: 0170

Model: HEXAGONAL SYSTEM
SiCtapered
Implant Ø: 4.7/5.2
Platform: 4.2
Code: 0171

SIGNO VINCES

Model: Duo
Implant Ø: 4.6
Platform: 4.1
Code: 0024

COMPATIBILITIES AVAILABLE

Model: Integra
Implant Ø: 3.75/4
Platform: 4.1
Code: 0024

Model: Compact
Implant Ø: 4.5
Platform: CM3.8
Code: 0004

Model: Duocon
Implant Ø: 3.8
Platform: CM3.8
Code: 0004

Model: Duocon
Implant Ø: 4.6/5.5
Platform: CM4.6
Code: 0005

Model: Infra
Implant Ø: 3.3/3.8/4.6
Platform: CM
Code: 0004

SIN IMPLANTS

Model: HE
Implant Ø: 3.75
Platform: 4.1
Code: 0024

Model: HI SW
Implant Ø: 3.8
Platform: 3.8
Code: 0039

Model: Tryon
Implant Ø: 3.25/3.75/4
Platform: 4.1
Code: 0024

Model: Tryon CO
Implant Ø: 4
Platform: 4.1
Code: 0024

Model: Revolution
Implant Ø: 3.25/3.75/4
Platform: 4.1
Code: 0024

Model: Stylus
Implant Ø: 4
Platform: 4.1
Code: 0024

Model: Epikut/Epikut Plus
Implant Ø: 4.5
Platform: 4.5
Code: 0024

Model: Epikut/Epikut Plus
Implant Ø: 5
Platform: 5
Code: 0058

Model: Epikut/Epikut Plus
Implant Ø: 3.5/3.8/4.5/5
Platform: Universal
Code: 0020

Model: Mini Pilar
Implant Ø: Universal
Platform: Universal
Code: 0025

SOUTHERN IMPLANTS

Model: Tri-Nex
Implant Ø: 3.5
Platform: 3.5
Code: 0026

Model: Tri-Nex
Implant Ø: 4.3
Platform: 4.3
Code: 0027

Model: Tri-Nex
Implant Ø: 5
Platform: 5
Code: 0028

Model: Tri-Nex
Implant Ø: 6
Platform: 6
Code: 0129

Model: IT Connection
Implant Ø: 3.3/4/4.1/4.9/5
Platform: 4.8
Code: 0037

Model: IT Connection
Implant Ø: 4.9/5/6
Platform: 6.5
Code: 0096

Model: External Hex
Implant Ø: 3.25
Platform: 3.4
Code: 0003

Model: External Hex
Implant Ø: 3.75/4
Platform: 4.1
Code: 0024

Model: External Hex
Implant Ø: 4.7/5
Platform: 5
Code: 0058

Model: External Hex
Implant Ø: 5.7/6
Platform: 6
Code: 0058

Model: Deep Conical
Implant Ø: 3
Platform: 2.45
Code: 0109

Model: Deep Conical
Implant Ø: 3.5/4
Platform: 2.95/3.1
Code: 0004

Model: Deep Conical
Implant Ø: 5
Platform: 4.1
Code: 0005

Model: Internal Hex
Implant Ø: 3.75/4.2/5
Platform: Universal
Code: 0040

Model: Provata
Implant Ø: 4/5/6
Platform: Standard
Code: 0040

Model: Compact Conical
Implant Ø: 4.8
Platform: 4.8
Code: 0025

STERI-OSS

Model: Hex-Loc
Implant Ø: 3.25
Platform: 3.3
Code: 0023

STERNGOLD

Model: STERN EX
Implant Ø: 3.75/4/5
Platform: 4.1
Code: 0024

STRAUMANN

Model: Tissue Level
Implant Ø: 3.3
Platform: 3.5
Code: 0160

Model: Tissue Level
Implant Ø: 3.3/4.1/4.8
Platform: Regular 4.8
Code: 0037

Model: Tissue Level
Implant Ø: 4.8
Platform: Wide 6.5
Code: 0096

Model: Synocta
Implant Ø:
Platform: Regular 4.8
Code: 0074

Model: Synocta
Implant Ø:
Platform: Wide 6.5
Code: 0137

Model: Bone Level Tapered SC
Implant Ø: 2.9
Platform: SC- 2.9
Code: 0135

Model: Bone Level
Implant Ø: 3.3
Platform: NC- 3.3
Code: 0033

Model: Bone Level
Implant Ø: 4.1
Platform: RC-4.1
Code: 0035

Model: Bone Level
Implant Ø: 4.8
Platform: RC-4.8
Code: 0035

Model: Screw-Retained
Implant Ø: NC/RC Ø4.6
Platform: Universal
Code: 0101

Model: BLX
Implant Ø: 3.5/3.75/4/4.5
Platform: RB (Regular Base)
Code: 0207

Model: BLX
Implant Ø: 5/5.5/6.5
Platform: WB (Wide Base)
Code: 0208

Model: BLC
Implant Ø: 3.3/3.75
Platform: RB
Code: 0207

Model: BLC
Implant Ø: 4.5/5.5/6.5
Platform: WB
Code: 0208

Model: TLX / TLX S
Implant Ø: 3.75/4.5
Platform: NT
Code: 0260

Model: TLX / TLX S
Implant Ø: 3.75/4.5
Platform: RT
Code: 0261

Model: TLX / TLX S
Implant Ø: 5.5/6.5
Platform: WT
Code: 0262

Model: TLC
Implant Ø: 3.3
Platform: NT
Code: 0260

Model: TLC
Implant Ø: 3.3/3.75/4.5
Platform: RT
Code: 0261

Model: TLC
Implant Ø: 4.5/5.5/6.5
Platform: WT
Code: 0262

SURCAM DENTAL

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0181

SYBRON IMPLANT SOLUTIONS

Model: Endopore (Innova)
Implant Ø: 4.1
Platform: 4.1
Code: 0024

SYSTHEX

Model: Classic-ci / Estetic-ci
Implant Ø: 3.5/3.75/4
Platform: 4.1
Code: 0024

TBR

Model: Hex-Conic
Implant Ø: 3.5
Platform: Narrow
Code: 0023

Model: Hex-Conic
Implant Ø: 5
Platform: Wide
Code: 0058

COMPATIBILITIES AVAILABLE

Model: Connect / Infinity
Implant Ø: 3.5
Platform: 3.5
Code: 0266

Model: Connect / Infinity
Implant Ø: 4
Platform: 4
Code: 0267

Model: Connect / Infinity
Implant Ø: 5
Platform: 5
Code: 0268

Model: Baby 8
Implant Ø: 4
Platform: 4
Code: 0267

Model: Baby 8
Implant Ø: 5
Platform: 5
Code: 0268

TITANIUM-FIX

Model: b-fix
Implant Ø: 3.5/4
Platform: Regular
Code: 0004

Model: b-fix
Implant Ø: 4.5/5
Platform: Larga
Code: 0005

TREE-OSS

Model: Simple
Implant Ø: 3.3/3.75/5
Platform: 3.75 Amarillo
Code: 0040

Model: Rapid/Anatomic
Implant Ø: 3.3
Platform: 3.5 Rosa
Code: 0023

Model: Rapid/Anatomic
Implant Ø: 3.75/4
Platform: 4.1 Amarillo
Code: 0024

Model: Rapid/Anatomic
Implant Ø: 5
Platform: 5.1 Azul
Code: 0061

Model: Anatomic/HS
Implant Ø: 3.5
Platform: 3.5 Rosa
Code: 0026

Model: Anatomic/HS
Implant Ø: 4.3
Platform: 4.3 Amarillo
Code: 0027

Model: Anatomic/HS
Implant Ø: 5
Platform: 5 Azul
Code: 0028

Model: Multi Unit
Implant Ø:
Platform: Universal
Code: 0025

TRI DENTAL IMPLANTS

Model: TRI-Vent
Implant Ø: 3.75/4.1/4.7
Platform: 3.5
Code: 0040

Model: TRI-Vent
Implant Ø: 3.75/4.1/4.7
Platform: 3.5
Code: 0042

TRINON

Model: O2
Implant Ø: 3.5/3.75/4.5
Platform: 4
Code: 0024

Model: OK
Implant Ø: 4
Platform: 4.8
Code: 0074

Model: OK
Implant Ø: 4
Platform: 4.8
Code: 0037

UFIT

Model: Gtz
Implant Ø: 3.5
Platform: Mini
Code: 0004

Model: Gtz
Implant Ø: 4/4.5
Platform: Regular
Code: 0005

Model: Gtz
Implant Ø: 5
Platform: Wide
Code: 0005

Model: Gtz
Implant Ø: 5.5/6/6.5/7
Platform: Ultra-wide
Code: 0005

Model: Ntz
Implant Ø: 3.5
Platform: Mini
Code: 0004

Model: Ntz
Implant Ø: 4/4.5
Platform: Regular
Code: 0005

Model: Ntz
Implant Ø: 5
Platform: Wide
Code: 0005

Model: Ntz
Implant Ø: 5.5/6/6.5/7
Platform: Ultra-wide
Code: 0005

VULKAN IMPLANTS

Model: IN-Hex
Implant Ø: 3.3/3.75/4.2/5
Platform: 3.75
Code: 0040

WARANTEC (ONEPLANT)

Model: IU Implant System
Implant Ø: 3.3/3.6
Platform: Mini
Code: 0004

Model: UT Implant System
Implant Ø: 3.6
Platform: Mini
Code: 0004

WIN

Model: WIN
Implant Ø: 3.30/3.75/4.25/5
Platform: 3.75
Code: 0040_B

Model: WIN
Implant Ø: Universal
Platform: Universal
Code: 0025

XIVE

Model: Xive
Implant Ø: 3
Platform: 3
Code: 0084

Model: Xive
Implant Ø: 3.4
Platform: 3.4
Code: 0038

Model: Xive
Implant Ø: 3.8
Platform: 3.8
Code: 0039

Model: Xive
Implant Ø: 4.5
Platform: 4.5
Code: 0085

Model: Xive
Implant Ø: 5.5
Platform: 5.5
Code: 0086

YES IMPLANT

Model: S-SYSTEM
Implant Ø: 3.3/3.5
Platform: Narrow
Code: 0030

Model: S-SYSTEM
Implant Ø: 4/4.5
Platform: Regular
Code: 0030

Model: S-SYSTEM
Implant Ø: 5/5.5
Platform: Wide
Code: 0030

ZIACOM

Model: OEX
Implant Ø: 3.75/4.25
Platform: RP 4.1
Code: 0024

Model: ZINIC
Implant Ø: 3.7/4/4.3
Platform: RP 3.5
Code: 0040_B

Model: ZINIC Shorty
Implant Ø: 4.75
Platform: RP 3.5
Code: 0040_B

Model: GALAXY
Implant Ø: 3.4/3.7/4
Platform: RP 2.85
Code: 0004

ZIMMER

Model: Screw-Vent
Implant Ø: 3.7/4.1
Platform: 3.5
Code: 0040

Model: Screw-Vent
Implant Ø: 3.7/4.1
Platform: 3.5
Code: 0042

Model: Screw-Vent
Implant Ø: 4.7
Platform: 4.5
Code: 0041

Model: Screw-Vent
Implant Ø: 4.7
Platform: Regular
Code: 0043

Model: Screw-Vent
Implant Ø: 6
Platform: 5.7
Code: 0080

Model: TSX Implant
Implant Ø: 3.1
Platform: 2.9
Code: 0178

Model: TSX Implant
Implant Ø: 3.7/4.1/4.7
Platform: 3.5
Code: 0040

Model: TSX Implant
Implant Ø: 3.7/4.1/4.7
Platform: 3.5
Code: 0042

Model: TSX Implant
Implant Ø: 5.4/6
Platform: 4.5
Code: 0041

Model: TSX Implant
Implant Ø: 5.4/6
Platform: 4.5
Code: 0043


COMPATIBILITIES AVAILABLE

Model: Swiss-Plus
Implant Ø: 3,7/4,1/4,8
Platform: 4,8
Code: 0074

Model: Swiss-Plus
Implant Ø: 3,7/4,1/4,8
Platform: 4,8
Code: 0037

Model: Eztetic
Implant Ø: 3,1
Platform: 2,9
Code: 0178

Model: Tapered Abutment
Implant Ø: Universal
Platform: Universal
Code: 0205



This printed version is probably outdated and may not include all products or compatibilities.

**Access and download the latest
version of this catalogue**

www.dynamicabutment.com

Some of the compatibilities listed may not appear in the catalogue, as some of the associated products are being developed and/or manufactured. If you have any queries, please contact us.

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 0.3 mm	α_s	α_c	GINGIVAL HEIGHT 1.2 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	GINGIVAL HEIGHT 3 mm	α_s
R	31.322.001.01-2	43°	29°	31.322.001.02-2	25°	22°	31.322.001.03-2	25°	31.322.001.04-2	20°
NR	31.312.001.01-2			31.312.001.02-2			31.312.001.03-2		31.312.001.04-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 0.3 mm	α_s	α_s	α_s	GINGIVAL HEIGHT 2 mm	α_s	α_s	α_s
		CH-5mm	CH-7mm	CH-9mm		CH-5mm	CH-7mm	CH-9mm
R	31.322.001.21-2	25°	20°	10°		25°	20°	10°
NR	31.312.001.21-2				31.312.001.23-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
		50.312.001.01-2	43.621.410.01-2 43.624.410.01-2	34.612.001.01-2	33.390.754.01-2	3	25°	23.412.001.01-2	54.315.001.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.410.103.01-2	10	50.312.001.04-2 (IG-3mm)			33.490.754.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
52.412.103.01-2	12				33.690.754.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
DYNAMIC SCREWS					STRAIGHT SCREWS						
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW			SCREWDRIVER Hex. 1.20	ANALOG				
41.316.084.01-2	43.618.201.01-2	18	40.316.003.01-2			43.601.103.02-2	22.612.001.01-2				
	43.624.201.01-2	24					LAB SCANBODY				
	43.632.201.01-2	32					30.412.001.01-2				
									SCREWDRIVER	43.601.103.02-2	

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.302.001.01-2	42.302.001.02-2	42.302.001.03-2	42.302.001.04-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT 0.3 mm		α_s	α_c	GINGIVAL HEIGHT 1.2 mm		α_s
R	31.323.002.01-2	45°	29°	31.323.002.02-2	31.313.002.02-2	25°
NR	31.313.002.01-2			31.313.002.02-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT 0.3 mm		α_s	α_s	α_s
		CH-5mm	CH-7mm	CH-9mm
R	31.323.002.21-2	25°	20°	10°
NR	31.313.002.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.408.101.01-2	8	50.313.002.01-2	43.621.410.01-2 43.624.410.01-2	34.613.002.01-2
52.410.101.01-2	10			
52.412.101.01-2	12			

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.805.01-2	3	30°
33.490.805.01-2	4	
33.690.805.01-2	6	

23.413.002.01-2

SCANBODY	PEEK PINS	TYPE
54.315.002.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.316.003.01-2	43.601.103.02-2

ANALOG

22.613.002.01-2

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT 1 mm		GINGIVAL HEIGHT 2 mm		GINGIVAL HEIGHT 3 mm		GINGIVAL HEIGHT 4 mm	
R	42.303.002.01-2	42.303.002.02-2	42.303.002.03-2	42.303.002.04-2			

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0.3 mm				0.5 mm			
R	31.322.003.01-2	45°	30°	31.322.003.02-2	25°	30°	
NR	31.312.003.01-2			31.312.003.02-2			

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH-5mm	CH-7mm	CH-9mm
R	31.322.003.23-2	30°	25°	15°
NR	31.312.003.23-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.003.01-2	43.621.410.01-2 43.624.410.01-2	34.612.003.01-2	33.390.716.01-2	3	25°
52.410.104.01-2	10				33.490.716.01-2	4	
52.412.104.01-2	12				33.690.716.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.065.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.320.003.02-2	43.601.103.02-2

ANALOG

22.612.003.01-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1 mm			2 mm			3 mm			4 mm		
R	31.323.004.01-2	45°	29°	31.323.004.02-2	30°	20°	31.323.004.03-2	25°	25°	31.323.004.04-2	20°	25°
NR	31.313.004.01-2			31.313.004.02-2			31.313.004.03-2			31.313.004.04-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s
	1 mm	CH-5mm	CH-7mm	CH-9mm
R	31.323.004.21-2	25°	20°	10°
NR	31.313.004.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α _{di}		SCANBODY	PEEK PINS	TYPE	
		50.313.004.01-2	43.621.410.01-2 43.624.410.01-2	34.613.004.01-2	33.390.754.01-2	3	25°	23.413.004.02-2	54.315.004.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A	
52.410.103.01-2	10	50.313.004.03-2 (IG-3mm)			33.490.754.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B	
52.412.103.01-2	12				33.690.754.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C	
DYNAMIC SCREWS					STRAIGHT SCREWS					49.416.000.04-2 (13 mm)	D	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG		22.613.004.01-2		LAB SCANBODY	49.416.000.05-2 (13 mm)	E
41.316.076.01-2	41.316.118.01-2	43.618.201.01-2	18	40.316.005.02-2	43.625.105.01-2			30.413.002.01-2		SCREWDRIVER	43.625.105.01-2	
		43.624.201.01-2	24									
		43.632.201.01-2	32									
MULTI-UNIT												

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	α_s	GINGIVAL HEIGHT 4 mm	α_s
R	31.324.005.01-2	38°	23°	31.324.005.02-2	25°	15°	31.324.005.03-2	20°	31.324.005.04-2	15°
NR	31.314.005.01-2			31.314.005.02-2			31.314.005.03-2		31.314.005.04-2	

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH+5mm	CH+7mm	CH+9mm
R	31.324.005.21-2	25°	20°	10°
NR	31.314.005.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHA- NK	α_{di}
		50.314.005.01-2	43.621.410.01-2 43.624.410.01-2	34.614.005.01-2	33.390.958.01-2	3	30°
52.410.102.01-2	10	50.314.005.03-2 (IG+3mm)			33.490.958.01-2	4	
52.412.102.01-2	12				33.690.958.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
41.320.090.01-2	41.320.137.01-2	43.618.201.01-2	18	40.320.005.03-2	43.625.105.01-2
		43.624.201.01-2	24		
		43.632.201.01-2	32		

ANALOG

22.614.005.01-2

LAB SCANBODY

30.413.002.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.005.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.625.105.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.2 mm			2 mm			3 mm			4 mm		
R	31.322.006.01-2	40°	20°	31.322.006.02-2	25°	12°	31.322.006.03-2	20°	30°	31.322.006.04-2	15°	30°
NR	31.312.006.01-2			31.312.006.02-2			31.312.006.03-2			31.312.006.04-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.2 mm	CH-5mm	CH-7mm	CH-9mm
R	31.322.006.21-2	30°	20°	15°
NR	31.312.006.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
		50.312.006.03-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.612.006.01-2	33.330.734.01-2	3	25°	23.412.006.01-2	54.315.006.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.410.105.01-2	10				33.430.734.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
52.412.105.01-2	12				33.630.734.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
DYNAMIC SCREWS				STRAIGHT SCREWS				ANALOG 22.612.006.01-2 LAB SCANBODY 30.412.001.01-2		49.416.000.04-2 (13 mm) 49.416.000.05-2 (13 mm)	D E
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	SCREWDRIVER 43.625.105.01-2					
41.316.072.01-2	41.316.115.01-2	43.618.201.01-2 43.624.201.01-2 43.632.201.01-2	18 24 32	40.316.005.01-2	43.625.105.01-2						

MULTI-UNIT

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	42.302.006.01-2	42.302.006.02-2	42.302.006.03-2	42.302.006.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	2.5/3.9 mm	3.5/4.9 mm	4.5/5.9 mm
NR	48.312.006.02-2	48.312.006.03-2	48.312.006.04-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1.5 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	α_s
R	31.323.007.01-2	38°	17°	31.323.007.02-2	25°	12°	31.323.007.03-2	25°
NR	31.313.007.01-2			31.313.007.02-2			31.313.007.03-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 1.5 mm	α_s	α_c	α_s
R	31.323.007.21-2	25°	20°	10°
NR	31.313.007.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREW/DRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
52.408.101.01-2	8	50.313.007.01-2	43.621.410.01-2	34.613.007.01-2	33.350.775.01-2	3	25°	23.413.007.01-2	54.315.007.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.410.101.01-2	10	50.313.007.03-2 (IG-3mm)	43.624.410.01-2		33.450.775.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
52.412.101.01-2	12				33.650.775.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
										49.416.000.04-2 (13 mm)	D
										49.416.000.05-2 (13 mm)	E

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREW/DRIVER LENGTH (mm)
41.318.074.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREW/DRIVER Hex. 1.27
40.318.005.02-2	43.625.105.01-2

ANALOG

22.613.007.01-2
LAB SCANBODY
30.413.002.01-2

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.303.007.01-2	42.303.007.02-2	42.303.007.03-2	42.303.007.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT 1.5/2.9 mm	GINGIVAL HEIGHT 2.5/3.9 mm	GINGIVAL HEIGHT 3.5/4.9 mm
NR	48.312.007.01-2	48.312.007.02-2	48.312.007.03-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0.5 mm

R	31.323.008.01-2	45°	30°
---	-----------------	-----	-----

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s
0.5 mm CH+5mm CH+7mm CH+9mm

R	31.323.008.21-2	25°	20°	10°
---	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY REFERENCE

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.408.113.01-2	8	50.313.008.01-2	43.621.410.01-2 43.624.410.01-2	34.613.008.01-2

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.370.716.01-2	3	30°
33.470.716.01-2	4	
33.670.716.01-2	6	

23.413.008.01-2

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.045.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.318.005.01-2	43.625.105.01-2

LAB SCANBODY 30.412.001.01-2

SCANBODY	PEEK PINS	TYPE
54.322.008.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
	SCREWDRIVER	43.625.105.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 0,3 mm	α_s	α_c	GINGIVAL HEIGHT 0,5 mm	α_s	α_c	GINGIVAL HEIGHT 1 mm	α_s
R	31.322.009.01-2	45°	25°	31.322.009.02-2	25°	25°	31.322.009.03-2	25°
NR	31.312.009.01-2			31.312.009.02-2			31.312.009.03-2	

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.114.01-2	10	50.312.009.01-2	43.621.410.01-2 43.624.410.01-2	34.612.009.01-2	33.390.716.01-2	3	25°
52.412.114.01-2	12				33.490.716.01-2	4	
					33.690.716.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.051.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG
40.320.003.01-2	43.601.103.02-2	22.612.009.01-2
		LAB SCANBODY
		30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.3 mm

R	31.323.010.01-2	45°	29°
NR	31.313.010.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.010.01-2	43.621.410.01-2 43.624.410.01-2	34.613.010.01-2	33.390.716.01-2	3	30°
52.410.115.01-2	10	50.313.010.04-2			33.490.716.01-2	4	
52.412.115.01-2	12	(IG=3mm)			33.690.716.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG
41.318.065.01-2	43.618.201.01-2	18	40.318.003.01-2	43.601.103.02-2	22.613.010.01-2
	43.624.201.01-2	24			LAB SCANBODY
	43.632.201.01-2	32			30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
1 mm	2 mm	3 mm	4 mm
R	42.303.010.01-2	42.303.010.02-2	42.303.010.03-2
			42.303.010.04-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c			
0.3 mm			
R	31.322.011.01-2	25°	29°
NR	31.312.011.01-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT				α_s	α_s	α_s	GINGIVAL HEIGHT				α_s	α_s	α_s	GINGIVAL HEIGHT				α_s	α_s	α_s
0.3 mm				CH-5mm	CH-7mm	CH-9mm	2 mm				CH-5mm	CH-7mm	CH-9mm	3 mm				CH-5mm	CH-7mm	CH-9mm
NR	31.312.011.21-2	25°	25°	15°	31.312.011.23-2	25°	20°	15°	31.312.011.24-2	25°	20°	10°								

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.108.01-2	10	50.312.011.01-2	43.621.410.01-2	34.612.011.01-2	33.345.804.01-2	3	20°
52.412.108.01-2	12		43.624.410.01-2		33.445.804.01-2	4	
					33.645.804.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.094.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.04-2	43.625.105.01-2

LAB SCANBODY

30.412.001.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.011.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.625.105.01-2

MULTI-UNIT

GINGIVAL HEIGHT		
1 mm	2 mm	3 mm
R	42.302.011.01-2	42.302.011.02-2
		42.302.011.03-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.3 mm

R	31.323.012.01-2	25°	30°
NR	31.313.012.01-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s GINGIVAL HEIGHT α_s α_s α_s GINGIVAL HEIGHT α_s α_s α_s

0.3 mm

CH-5mm

CH-7mm

CH-9mm

2 mm

CH-5mm

CH-7mm

CH-9mm

3 mm

CH-5mm

CH-7mm

CH-9mm

NR	31.313.012.21-2	25°	25°	15°	31.313.012.23-2	25°	20°	15°	31.313.012.24-2	25°	20°	10°
----	-----------------	-----	-----	-----	-----------------	-----	-----	-----	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.109.01-2	10	50.313.012.01-2	43.621.410.01-2 43.624.410.01-2	34.613.012.01-2	33.345.804.01-2	3	20°
52.412.109.01-2	12				33.445.804.01-2	4	
					33.645.804.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.094.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.04-2	43.625.105.01-2

LAB SCANBODY

30.413.002.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.012.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER 43.625.105.01-2		

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

R	42.303.012.01-2	42.303.012.02-2	42.303.012.03-2
---	-----------------	-----------------	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c
0,7 mm			
R	31.323.013.01-2	43°	23°
NR	31.313.013.01-2		

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.074.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER TORX T6
40.320.007.02-2	43.601.107.01-2
LAB SCANBODY	
30.413.002.01-2	

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.2 mm			2 mm			3 mm		
R	31.322.014.01-2	41°	23°	31.322.014.02-2	25°	17°		20°	25°
NR	31.312.014.01-2			31.312.014.02-2			31.312.014.03-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s
	3 mm	CH-5mm	CH-7mm	CH-9mm
R	31.322.014.23-2	25°	20°	15°
NR	31.312.014.23-2			

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL****SCANALOG****SCANBODY OP**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL			SHANK	α_{di}	23.412.014.01-2	SCANBODY		PEEK PINS		TYPE
		50.312.014.03-2 (IG-3mm)	43.621.415.01-2	34.612.014.01-2	33.345.804.01-2	3	25°	54.315.014.21-2	49.414.000.01-2 (6 mm)		49.415.000.01-2 (9 mm)	49.416.000.01-2 (13 mm)	A		
52.410.128.01-2	10				33.445.804.01-2	4			49.414.000.02-2 (6 mm)		49.415.000.02-2 (9 mm)	49.416.000.02-2 (13 mm)		B	
					33.645.804.01-2	6			49.414.000.03-2 (6 mm)		49.415.000.03-2 (9 mm)	49.416.000.03-2 (13 mm)			C
DYNAMIC SCREWS					STRAIGHT SCREWS					49.416.000.04-2 (13 mm)	D				
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	LAB SCANBODY		SCREWDRIVER		43.601.103.02-2		E			
41.314.067.01-2	41.314.105.01-2	43.618.201.01-2	18	40.314.003.04-2	43.601.103.02-2	30.412.001.01-2									
		43.624.201.01-2	24												
		43.632.201.01-2	32												

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
41.314.067.01-2	41.314.105.01-2	43.618.201.01-2	18	40.314.003.04-2	43.601.103.02-2
		43.624.201.01-2	24		
		43.632.201.01-2	32		

MULTI-UNIT

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	2 mm	3 mm	4 mm
R	42.302.014.02-2	42.302.014.03-2	42.302.014.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	3.5 / 4.9 mm	4.5 / 5.9 mm
NR	48.312.014.03-2	48.312.014.04-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1.7 mm	α_s	α_c	GINGIVAL HEIGHT 2.5 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	α_s	GINGIVAL HEIGHT 4 mm	α_s	GINGIVAL HEIGHT 5 mm	α_s
R	31.323.015.01-2	43°	23°	31.323.015.02-2	25°	15°	31.323.015.03-2	25°	31.323.015.04-2	20°	31.323.015.05-2	15°
NR	31.313.015.01-2			31.313.015.02-2			31.313.015.03-2		31.313.015.04-2		31.313.015.05-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 1.7 mm	α_s	α_s	α_s	GINGIVAL HEIGHT 2.5 mm	α_s	α_s	α_s	GINGIVAL HEIGHT 3.5 mm	α_s	α_s	α_s	GINGIVAL HEIGHT 1 mm	α_s	α_s	α_s
R	31.323.015.21-2	30°	25°	10°	31.323.015.22-2	25°	20°	10°		25°	20°	10°	31.323.015.27-2	30°	25°	20°
NR	31.313.015.21-2				31.313.015.22-2				31.313.015.26-2				31.313.015.27-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
52.410.104.01-2	10	50.313.015.01-2	43.621.410.01-2	34.613.015.01-2	33.390.805.01-2	3	25°	23.413.015.01-2	54.315.015.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.412.104.01-2	12	50.313.015.03-2 (IG=3mm)	43.624.410.01-2		33.490.805.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
					33.690.805.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
										49.416.000.04-2 (13 mm)	D
										49.416.000.05-2 (13 mm)	E

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.075.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.318.003.02-2	43.601.103.02-2

LAB SCANBODY

30.413.001.01-2

SCREWDRIVER

43.601.103.02-2

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.303.015.01-2	42.303.015.02-2	42.303.015.03-2	42.303.015.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT 1.5/2.9 mm	GINGIVAL HEIGHT 2.5/3.9 mm	GINGIVAL HEIGHT 4.5/5.9 mm
NR	48.312.015.01-2	48.312.015.02-2	48.312.015.04-2

MULTI-UNIT 4.0

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	61.303.015.01-2	61.303.015.02-2	61.303.015.03-2	61.303.015.04-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,8 mm				1,5 mm			
R	31.322.016.01-2	45°	28°	31.322.016.02-2	25°	25°	
NR	31.312.016.01-2			31.312.016.02-2			

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_c	α_s
1,5 mm		CH+5mm	CH+7mm	CH+9mm
NR	31.312.016.22-2	25°	25°	15°

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.106.01-2	8	50.312.016.01-2 50.312.016.04-2 (IG+3mm)	43.621.410.01-2 43.624.410.01-2	34.612.016.01-2	33.360.754.01-2	3	25°
52.410.106.01-2	10				33.460.754.01-2	4	
52.412.106.01-2	12				33.660.754.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.071.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.05-2	43.625.105.01-2

LAB SCANBODY

30.412.001.01-2

MULTI-UNIT

GINGIVAL HEIGHT

2 mm	
R	42.302.016.02-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0.7 mm				1.5 mm			
R	31.323.017.01-2	45°	24°	R	31.323.017.02-2	25°	15°
NR	31.313.017.01-2			R	31.313.017.02-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
0.7 mm		CH-5mm	CH-7mm	CH-9mm
R	31.323.017.21-2	30°	25°	15°
NR	31.313.017.21-2			

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.101.01-2	8	50.313.017.04-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.613.017.01-2	33.360.756.01-2	3	30°
52.410.101.01-2	10				33.460.756.01-2	4	
52.412.101.01-2	12				33.660.756.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.073.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.317.005.01-2	43.625.105.01-2

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT
GINGIVAL HEIGHT

2 mm

R	42.303.017.02-2
---	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

1.2 mm

R	31.324.018.01-2	39°	18°
NR	31.314.018.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.018.01-2	43.621.410.01-2 43.624.410.01-2	34.614.018.01-2	33.360.756.01-2	3	30°
52.410.102.01-2	10				33.460.756.01-2	4	
52.412.102.01-2	12				33.660.756.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.073.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.317.005.01-2	43.625.105.01-2

LAB SCANBODY
30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0.8 mm

R	31.322.019.01-2	45°	30°
NR	31.312.019.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.019.01-2	43.621.410.01-2 43.624.410.01-2	34.612.019.01-2	33.360.754.01-2	3	25°
52.410.105.01-2	10				33.460.754.01-2	4	
52.412.105.01-2	12				33.660.754.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.071.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.05-2	43.625.105.01-2

LAB SCANBODY
30.412.001.01-2

MULTI-UNIT

GINGIVAL HEIGHT

1 mm

R	42.302.019.01-2
---	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,6 mm

R	31.323.020.01-2	45°	30°
---	-----------------	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.112.01-2	8	50.313.020.01-2	43.620.411.01-2	34.613.020.01-2	33.390.716.01-2	3	30°
					33.490.716.01-2	4	
					33.690.716.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.044.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.06-2	43.625.105.01-2

LAB SCANBODY

30.413.005.01-2

REFERENCE SCANBODY

SCANBODY	PEEK PINS	TYPE
54.322.020.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
	SCREWDRIVER	43.625.105.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.5 mm			2 mm			3 mm			4 mm			5 mm		
R	31.322.021.01-2	43°	24°	31.322.021.02-2	25°	20°	31.322.021.03-2	20°	30°	31.322.021.04-2	15°	30°	31.322.021.05-2	15°	20°
NR	31.312.021.01-2			31.312.021.02-2			31.312.021.03-2			31.312.021.04-2			31.312.021.05-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.5 mm	CH-5mm	CH-7mm	CH-9mm	3 mm	CH-5mm	H-7mm	CH-9mm
R	31.322.021.21-2	25°	20°	10°	31.322.021.23-2	25°	20°	15°
NR	31.312.021.21-2				31.312.021.23-2			

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL
SCANALOG
SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
52.410.103.01-2	10	50.312.021.03-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.612.021.01-2	33.335.754.01-2	3	25°	23.412.021.01-2	54.315.015.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.412.103.01-2	12				33.435.754.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
					33.635.754.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
										49.416.000.04-2 (13 mm)	D
										49.416.000.05-2 (13 mm)	E

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP	ANALOG
41.316.073.01-2	41.316.108.01-2	43.618.201.01-2	18	40.316.008.02-2	43.625.108.01-2	22.612.021.01-2
		43.624.201.01-2	24			LAB SCANBODY
		43.632.201.01-2	32			30.412.001.01-2

MULTI-UNIT
ANGULATED MULTI-UNIT 28°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm	3.5/5.4 mm	4.5/6.4 mm
R	42.302.021.01-2	42.302.021.02-2	42.302.021.03-2	42.302.021.04-2	48.612.021.03-2	48.612.021.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1.5/2.9 mm	2.5/3.9 mm	4.5/5.9 mm
NR	48.312.021.01-2	48.312.021.02-2	48.312.021.04-2

MULTI-UNIT 4.0

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	61.302.021.01-2	61.302.021.02-2	61.302.021.03-2	61.302.021.04-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.3 mm			2 mm			3 mm			4 mm			5 mm		
R	31.323.022.01-2	40°	19°	31.323.022.02-2	25°	14°	31.323.022.03-2	20°	30°	31.323.022.04-2	15°	30°	31.323.022.05-2	15°	20°
NR	31.313.022.01-2			31.313.022.02-2			31.313.022.03-2			31.313.022.04-2			31.313.022.05-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.3 mm	CH-5mm	CH-7mm	CH-9mm	3 mm	CH-5mm	CH-7mm	CH-9mm
R	31.323.022.21-2	30°	25°	10°	31.323.022.23-2	20°	20°	10°
NR	31.313.022.21-2				31.313.022.23-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
52.408.101.01-2	8	50.313.022.01-2	43.621.410.01-2	34.613.022.01-2	33.335.758.01-2	3	30°	23.413.022.01-2	54.315.022.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.410.101.01-2	10	50.313.022.03-2 (IG-3mm)	43.624.410.01-2		33.435.758.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
52.412.101.01-2	12				33.635.758.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
										49.416.000.04-2 (13 mm)	D
										49.416.000.05-2 (13 mm)	E

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP	ANALOG
41.320.075.01-2	41.320.117.01-2	43.618.201.01-2	18	40.320.008.02-2	43.625.108.01-2	22.613.022.01-2
		43.624.201.01-2	24			LAB SCANBODY
		43.632.201.01-2	32			30.413.002.01-2

MULTI-UNIT

ANGULATED MULTI-UNIT 28°

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1 mm		2 mm		3 mm		4 mm		3.5/5.4 mm		4.5/6.4mm	
R	42.303.022.01-2	42.303.022.02-2	42.303.022.03-2	42.303.022.04-2					NR	48.612.022.03-2	48.612.022.04-2

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT		GINGIVAL HEIGHT
1,5/2,9 mm		2,5/3,9 mm
NR	48.312.022.01-2	48.312.022.02-2

MULTI-UNIT 4.0

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1 mm		2 mm		3 mm		4 mm	
R	61.302.022.01-2	61.302.022.02-2	61.302.022.03-2	61.302.022.04-2			

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,3 mm

R	31.322.023.01-2	45°	30°
NR	31.312.023.01-2		

DYNAMIC SCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}	
		50.312.023.01-2	43.621.410.01-2 43.624.410.01-2	34.612.023.01-2	33.390.805.01-2	3	25°	23.412.023.01-2
52.410.103.01-2	10				33.490.805.01-2	4		
52.412.103.01-2	12				33.690.805.01-2	6		
DYNAMIC SCREWS				STRAIGHT SCREWS				
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)			STRAIGHT SCREW	SCREWDRIVER UNIGRIP		ANALOG
41.316.059.01-2	43.618.201.01-2	18			40.316.008.01-2	43.625.108.01-2		22.612.023.01-2
	43.624.201.01-2	24					LAB SCANBODY	
	43.632.201.01-2	32					30.412.001.01-2	

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c			GINGIVAL HEIGHT α_s α_c		
0,3 mm			0,5 mm		
R	31.323.024.01-2	45° 30°	31.323.024.02-2	30°	30°
NR	31.313.024.01-2		31.313.024.02-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		GINGIVAL HEIGHT		α_s	α_s	α_s
0,3 mm		0,5 mm		1 mm		2 mm		CH-5mm	CH-7mm	CH-9mm	3 mm		4 mm		CH-5mm	CH-7mm	CH-9mm
R	31.323.024.21-2	31.323.024.22-2	31.323.024.23-2	31.323.024.24-2	30°	25°	10°	31.323.024.25-2	31.323.024.26-2	25°	20°	15°	31.323.024.25-2	31.323.024.26-2	25°	20°	15°
NR	31.313.024.21-2	31.313.024.22-2	31.313.024.23-2	31.313.024.24-2													

DIGITAL ANALOG**DYNAMIC MILLING TOOL****SCANALOG****SCANBODY OP****DIGITAL ANALOG**

34.613.024.01-2

DYNAMIC MILLING TOOL

SHANK	α_{di}
33.390.716.01-2	30°
33.490.716.01-2	
33.690.716.01-2	

SHANK

3
4
6

 α_{di}

30°

23.413.024.01-2

SCANBODY**PEEK PINS****TYPE**

54.315.024.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E

SCREWDRIVER

43.625.108.01-2

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.060.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.320.008.01-2	43.625.108.01-2

ANALOG

22.613.024.01-2

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT		GINGIVAL HEIGHT	
2 mm		3 mm	
R	42.303.024.02-2	42.303.024.03-2	

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0.3 mm

R	31.323.025.01-2	45°	30°
---	-----------------	-----	-----

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s
0.3 mm CH-5mm CH-7mm CH-9mm

R	31.323.025.21-2	30°	25°	10°
---	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL
SCANALOG
REFERENCE SCANBODY

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.408.112.01-2	8	50.313.025.02-2	43.620.411.01-2	34.613.025.01-2
			43.621.410.01-2	
52.410.111.01-2	10	50.313.025.01-2	43.624.410.01-2	

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.716.01-2	3	30°
33.490.716.01-2	4	
33.690.716.01-2	6	

23.413.025.01-2
23.313.025.01-2 (Titanium)

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREW Ø2.6	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.039.01-2	41.314.050.31-2 (Temporary or Zirconio Direct MU)	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.314.008.01-2	43.625.108.01-2

MINI SCANBODY

53.413.025.01-2

ANALOG

22.613.025.01-2

LAB SCANBODY

30.413.005.01-2

SCANBODY	PEEK PINS	TYPE
54.322.025.31-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular)	3.8
	49.418.000.02-2 (Wide)	
	49.419.000.01-2 (Regular)	6
	49.419.000.02-2 (Wide)	
	49.420.000.01-2 (Regular)	8
	49.420.000.02-2 (Wide)	
SCREWDRIVER		43.625.108.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0.5 mm				1.2 mm			
R	31.322.026.01-2	45°	29°	31.322.026.02-2	25°	22°	
NR	31.312.026.01-2			31.312.026.02-2			

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
0.5 mm				
		CH-5mm	CH-7mm	CH-9mm
R	31.322.026.21-2	25°	20°	10°
NR	31.312.026.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.108.01-2	10	50.312.026.04-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.612.026.01-2	33.390.805.01-2	3	25°
52.412.108.01-2	12				33.490.805.01-2	4	
					33.690.805.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.075.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.318.008.01-2	43.625.108.01-2

ANALOG

22.612.026.01-2

LAB SCANBODY

30.412.001.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.026.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.625.108.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0.3 mm				1.2 mm			
R	31.323.027.01-2	35°	29°	31.323.027.02-2	25°	22°	
NR	31.313.027.01-2			31.313.027.02-2			

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
0.3 mm		CH-5mm	CH-7mm	CH-9mm
R	31.323.027.21-2	25°	20°	10°
NR	31.313.027.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.109.01-2	10	50.314.027.01-2	43.621.410.01-2 43.624.410.01-2	34.613.027.01-2	33.390.958.01-2	3	30°
52.412.109.01-2	12				33.490.958.01-2	4	
					33.690.958.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.090.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.320.008.03-2	43.625.108.01-2

ANALOG

22.613.027.01-2

LAB SCANBODY

30.413.002.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.027.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.625.108.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,3 mm

R	31.324.028.01-2	35°	30°
NR	31.314.028.01-2		

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.109.01-2	10	50.314.028.01-2	43.621.410.01-2 43.624.410.01-2	34.614.028.01-2	33.390.958.01-2	3	30°
52.412.109.01-2	12				33.490.958.01-2	4	
					33.690.958.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.090.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.320.008.03-2	43.625.108.01-2

ANALOG

22.614.028.01-2

LAB SCANBODY

30.413.002.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.028.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.625.108.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.2 mm			2 mm			3 mm			4 mm		
R	31.322.029.01-2	30°	23°	31.322.029.02-2	25°	15°	31.322.029.03-2	20	25	31.322.029.04-2	15°	25°
NR	31.312.029.01-2			31.312.029.02-2			31.312.029.03-2			31.312.029.04-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.2 mm	CH-5mm	CH-7mm	CH-9mm	2 mm	CH-5mm	H-7mm	CH-9mm
R	31.322.029.21-2	25°	20°	20°		25°	20°	15°
NR	31.312.029.21-2				31.312.029.22-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}	
		50.312.029.01-2	43.621.410.01-2 43.624.410.01-2	34.613.029.01-2	33.345.804.01-2	3	20°	23.412.029.01-2
52.410.103.01-2	10	50.312.029.03-2 (IG-3mm)			33.445.804.01-2	4		
52.412.103.01-2	12				33.645.804.01-2	6		

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
41.316.094.01-2	41.316.132.01-2	43.618.201.01-2	18	40.316.003.02-2	43.601.103.02-2
		43.624.201.01-2	24		
		43.632.201.01-2	32		

LAB SCANBODY

30.412.001.01-2

SCANBODY	PEEK PINS	TYPE
54.315.029.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

MULTI-UNIT

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	42.302.029.01-2	42.302.029.02-2	42.302.029.03-2	42.302.029.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	2.5/3.9 mm	3.5/4.9 mm	4.5/5.9 mm
NR	48.312.029.02-2	48.312.029.03-2	48.312.029.04-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.1 mm			2 mm			3 mm			4 mm		
R	31.323.030.01-2	42°	25°	31.323.030.02-2	25°	15°	31.323.030.03-2	20°	30°	31.323.030.04-2	15°	30°
NR	31.313.030.01-2			31.313.030.02-2			31.313.030.03-2			31.313.030.04-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.1 mm	CH-5mm	CH-7mm	CH-9mm	2 mm	CH-5mm	CH-7mm	CH-9mm	3 mm	CH-5mm	CH-7mm	CH-9mm
R	31.323.030.21-2	25°	20°	10°	31.323.030.22-2	25°	20°	15°	31.323.030.23-2	25°	20°	10°
NR	31.313.030.21-2				31.313.030.22-2				31.313.030.23-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α _{di}		SCANBODY	PEEK PINS	TYPE
52.408.101.01-2	8	50.313.030.01-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.613.030.01-2	33.345.808.01-2	3	30°	23.413.030.01-2	54.315.030.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.410.101.01-2	10				33.445.808.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
52.412.101.01-2	12				33.645.808.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
DYNAMIC SCREWS				STRAIGHT SCREWS				49.416.000.04-2 (13 mm)		D	
								49.416.000.05-2 (13 mm)		E	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)		STRAIGHT SCREW	SCREWDRIVER Hex. 1.20				LAB SCANBODY	
41.320.079.01-2	41.320.125.01-2	43.618.201.01-2	18		40.320.003.04-2	43.601.103.02-2			30.413.002.01-2		
		43.624.201.01-2	24								
		43.632.201.01-2	32								
MULTI-UNIT											
GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT			
1 mm		2 mm		3 mm		4 mm		5 mm			
R		42.303.030.01-2		42.303.030.02-2		42.303.030.03-2		42.303.030.04-2		42.303.030.05-2	
ANGULATED MULTI-UNIT 20°											
GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT			
1.5/2.9 mm		2.5/3.9 mm		3.5/4.9 mm		4.5/5.9 mm		5.5/6.9 mm			
NR		48.312.030.01-2		48.312.030.02-2		48.312.030.03-2		48.312.030.04-2		48.312.030.05-2	
ANGULATED MULTI-UNIT 30°											
GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT			
1 mm		2 mm		3 mm		4 mm		5 mm			
NR		48.312.030.01-2		48.312.030.02-2		48.312.030.03-2		48.312.030.04-2		48.312.030.05-2	

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.3 mm			2 mm			3 mm			4 mm		
R	31.322.033.01-2	38°	18°	31.322.033.02-2	20°	14°	31.322.033.03-2	15°	25°	31.322.033.04-2	15°	25°
NR	31.312.033.01-2			31.312.033.02-2			31.312.033.03-2			31.312.033.04-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.3 mm	CH-5mm	CH-7mm	CH-9mm	3 mm	CH-5mm	CH-7mm	CH-9mm
R	31.322.033.21-2	25°	20°	10°	31.322.033.23-2	20°	15°	10°
NR	31.312.033.21-2				31.312.033.23-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYRE	
52.408.106.01-2	8	50.312.033.03-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.612.033.01-2	33.315.804.01-2	3	25°	23.412.033.01-2	54.315.033.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A	
52.410.106.01-2	10				33.415.804.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B	
52.412.106.01-2	12				33.615.804.01-2	6						
DYNAMIC SCREWS				STRAIGHT SCREWS								
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG		22.612.033.01-2			49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
41.316.078.01-2	41.316.124.01-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2	LAB SCANBODY		30.412.001.01-2			49.416.000.04-2 (13 mm)	D
							49.416.000.05-2 (13 mm)	E				
						SCREWDRIVER		43.601.107.01-2				

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6
41.316.078.01-2	41.316.124.01-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2
		43.624.201.01-2	24		
		43.632.201.01-2	32		

MULTI-UNIT

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	42.302.033.01-2	42.302.033.02-2	42.302.033.03-2	42.302.033.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	2.5/3.9 mm	3.5/4.9 mm	4.5/5.9 mm
NR	48.312.033.02-2	48.312.033.03-2	48.312.033.04-2

MULTI-UNIT 4.0

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	61.302.033.01-2	61.302.033.02-2	61.302.033.03-2	61.302.033.04-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1.1 mm			2 mm			3 mm			4 mm		
R	31.323.035.01-2	39°	18°	31.323.035.02-2	20°	14°	31.323.035.03-2	15°	30°	31.323.035.04-2	15°	30°
NR	31.313.035.01-2			31.313.035.02-2			31.313.035.03-2			31.313.035.04-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.1 mm	CH-5mm	CH-7mm	CH-9mm	3 mm	CH-5mm	CH-7mm	CH-9mm
R	31.323.035.21-2	25°	20°	10°	31.323.035.23-2	20°	15°	10°
NR	31.313.035.21-2				31.313.035.23-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY		HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE	
			50.313.035.01-2	43.621.410.01-2 43.624.410.01-2	34.613.035.01-2	33.315.804.01-2	3	25°	23.413.035.01-2	54.315.035.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A	
52.410.107.01-2	10	50.313.035.03-2 (IG-3mm)	33.415.804.01-2			4	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)				B		
52.412.107.01-2	12		33.615.804.01-2			6	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)				C		
DYNAMIC SCREWS						STRAIGHT SCREWS						49.416.000.04-2 (13 mm)	D
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG						49.416.000.05-2 (13 mm)	E
41.316.078.01-2	41.316.124.01-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2	22.613.035.01-2					SCREWDRIVER	43.601.107.01-2	
		43.624.201.01-2	24			LAB SCANBODY							
		43.632.201.01-2	32			30.413.002.01-2							

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6
41.316.078.01-2	41.316.124.01-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2
		43.624.201.01-2	24		
		43.632.201.01-2	32		

ANALOG

22.613.035.01-2

LAB SCANBODY

30.413.002.01-2

SCREWDRIVER

43.601.107.01-2

MULTI-UNIT

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	42.303.035.01-2	42.303.035.02-2	42.303.035.03-2	42.303.035.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	2.5/3.9 mm	3.5/4.9 mm
NR	48.312.035.02-2	48.312.035.03-2

MULTI-UNIT 4.0

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	61.303.035.01-2	61.303.035.02-2	61.303.035.03-2	61.303.035.04-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0.6 mm

R	31.323.037.01-2	45°	25°
NR	31.313.037.01-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s
0.6 mm CH-5mm CH-7mm CH-9mm

R	31.323.037.21-2	30°	25°	15°
NR	31.313.037.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.408.110.01-2	8	50.313.037.04-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.613.037.01-2
52.410.110.01-2	10			
52.412.110.01-2	12			

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.315.708.01-2	3	30°
33.415.708.01-2	4	
33.615.708.01-2	6	

23.413.037.01-2

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.067.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER TORX T6
40.320.007.01-2	43.601.107.01-2

ANALOG

22.613.037.01-2

LAB SCANBODY

30.413.004.01-2

SCANBODY	PEEK PINS	TYPE
54.315.037.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	SCREWDRIVER	43.601.107.01-2

MULTI-UNIT

GINGIVAL HEIGHT
1 mm

R	42.303.037.01-2
---	-----------------

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

0,7 mm

R	31.322.038.01-2	45°	29°
NR	31.312.038.01-2		

DYNAMIC 3TIBASEGINGIVAL HEIGHT α_s α_s α_s

0,7 mm

CH-5mm

CH-7mm

CH-9mm

R	31.322.038.21-2	30°	25°	10°
NR	31.312.038.21-2			

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.038.01-2	43.621.410.01-2 43.624.410.01-2	34.612.038.01-2	33.345.804.01-2	3	25°
52.410.103.01-2	10				33.445.804.01-2	4	
52.412.103.01-2	12				33.645.804.01-2	6	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.081.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.316.004.02-2	43.601.104.01-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s
0,7 mm				2 mm		
R	31.323.039.01-2	45°	29°	31.323.039.03-2	25°	
NR	31.313.039.01-2			31.313.039.03-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
0,7 mm		CH-5mm	CH-7mm	CH-9mm
R	31.323.039.21-2	30°	25°	10°
NR	31.313.039.21-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.039.01-2	43.621.410.01-2 43.624.410.01-2	34.613.039.01-2	33.345.856.01-2	3	25°
52.410.114.01-2	10				33.445.856.01-2	4	
52.412.114.01-2	12				33.645.856.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.081.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.316.004.02-2	43.601.104.01-2

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT	
1 mm	
R	42.303.039.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0.6 mm				1.5 mm				3 mm				4 mm				5 mm			
R	31.322.040.01-2	45°	30°			25°	25°			20°	30°			15°	30°			10°	23°
NR	31.312.040.01-2			31.322.040.02-2				31.322.040.03-2				31.322.040.04-2				31.322.040.05-2			
NR (Friction Fit)	31.312.042.01-2			31.312.040.02-2				31.312.040.03-2				31.312.040.04-2				31.312.040.05-2			

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		GINGIVAL HEIGHT		α_s	α_s	α_s
0.6 mm		CH-5mm	CH-7mm	CH-9mm	1 mm		CH-5mm	CH-7mm	CH-9mm	2 mm		3 mm		CH-5mm	CH-7mm	CH-9mm
R	31.322.040.21-2	25°	20°	10°	31.322.040.29-2		30°	25°	20°			31.322.040.23-2		25°	20°	15°
NR	31.312.040.21-2				31.312.040.29-2					31.312.040.28-2		31.312.040.23-2				

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY		HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL		SHANK	α_{di}	SCANALOG		SCANBODY		PEEK PINS		TYPE
52.408.101.01-2	8	50.312.040.03-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.612.040.01-2		33.370.716.01-2	3	25°		23.412.040.01-2		54.315.040.21-2		49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A	
52.410.101.01-2	10					33.470.716.01-2	4							49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B	
52.412.101.01-2	12					33.670.716.01-2	6							49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C	
DYNAMIC SCREWS					STRAIGHT SCREWS					ANALOG						
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27					LAB SCANBODY			SCREWDRIVER		43.625.105.01-2	
41.317.071.01-2	41.317.106.01-2	43.618.201.01-2	18	40.317.004.01-2	43.601.104.01-2	22.612.040.01-2				30.412.001.01-2						
		43.624.201.01-2	24													
		43.632.201.01-2	32													

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.071.01-2	41.317.106.01-2	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.317.004.01-2	43.601.104.01-2

ANALOG

22.612.040.01-2

LAB SCANBODY

30.412.001.01-2

MULTI-UNIT

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1 mm		2 mm		3 mm		4 mm		2.5 mm		3.5 mm		4.5 mm	
R	42.302.040.01-2	42.302.040.02-2	42.302.040.03-2	42.302.040.04-2	NR	48.312.040.02-2	48.312.040.03-2	48.312.040.04-2					

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0.6 mm				1.5 mm				3 mm				4 mm			
R	31.322.040.01-2	45°	30°	31.322.040.02-2	25°	25°	20°	31.322.040.03-2	30°	15°	30°	31.322.040.04-2	10°	23°	
NR	31.312.040.01-2			31.312.040.02-2				31.312.040.03-2				31.312.040.04-2			
NR (Friction Fit)	31.312.042.01-2														

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		GINGIVAL HEIGHT		α_s	α_s	α_s
0.6 mm		CH-5mm	CH-7mm	CH-9mm	1 mm		CH-5mm	CH-7mm	CH-9mm	2 mm		3 mm		CH-5mm	CH-7mm	CH-9mm
R	31.322.040.21-2	25°	20°	10°	31.322.040.29-2	30°	25°	20°		31.322.040.23-2		25°	20°	15°		
NR	31.312.040.21-2				31.312.040.29-2				31.312.040.28-2		31.312.040.23-2					

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.071.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT 0.4 mm		α_s	α_c	GINGIVAL HEIGHT 1.5 mm		α_s	α_c
R	31.323.041.01-2	45°	30°		31.323.041.02-2	30°	25°
NR	31.313.041.01-2				31.313.041.02-2		
NR (Friction Fit)	31.313.043.01-2						

DYNAMIC 3TIBASE

GINGIVAL HEIGHT 0.4 mm		α_s	α_s	α_s	GINGIVAL HEIGHT 1.5 mm		α_s	α_s	α_s
		CH-5mm	CH-7mm	CH-9mm			CH-5mm	CH-7mm	CH-9mm
R	31.323.041.21-2	30°	20°	10°		31.323.041.22-2	30°	25°	15°
NR	31.313.041.21-2					31.313.041.22-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
		50.313.041.01-2	43.621.410.01-2 43.624.410.01-2	34.613.041.01-2	33.370.716.01-2	3	30°	23.413.041.01-2	54.315.041.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
52.410.102.01-2	10	50.313.041.03-2 (IG-3mm)			33.470.716.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
52.412.102.01-2	12				33.670.716.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
DYNAMIC SCREWS				STRAIGHT SCREWS						49.416.000.04-2 (13 mm)	D
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG				49.416.000.05-2 (13 mm)	E
41.317.071.01-2	41.317.106.01-2	43.618.201.01-2	18	40.317.004.01-2	43.601.104.01-2	22.613.041.01-2					
		43.624.201.01-2	24			LAB SCANBODY					
		43.632.201.01-2	32			30.413.002.01-2					
						SCREWDRIVER		43.625.105.01-2			

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
41.317.071.01-2	41.317.106.01-2	43.618.201.01-2	18	40.317.004.01-2	43.601.104.01-2
		43.624.201.01-2	24		
		43.632.201.01-2	32		

STANDARD DYNAMIC TIBASE						
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_c
0.4 mm				1.5 mm		
R	31.323.041.01-2	45°	30°	31.323.041.02-2	30°	25°
NR	31.313.041.01-2			31.313.041.02-2		

DYNAMIC 3TIBASE				
GINGIVAL HEIGHT		α_s	α_s	α_s
0.4 mm		CH-5mm	CH-7mm	CH-9mm
R	31.323.041.21-2	30°	20°	10°
NR	31.313.041.21-2			

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.071.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.370.716.01-2	3	30°
33.470.716.01-2	4	
33.670.716.01-2	6	

LAB SCANBODY
30.413.002.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s
R	31.322.044.01-2	42°	23°	31.322.044.02-2	25°
NR	31.312.044.01-2			31.312.044.02-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 1 mm	α_s CH-5mm	α_s CH-7mm	α_s CH-9mm
R	31.322.044.21-2	25°	20°	10°
NR	31.312.044.21-2			

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.044.01-2	43.621.410.01-2 43.624.410.01-2	34.612.044.01-2	33.390.716.01-2	3	25°
52.410.105.01-2	10				33.490.716.01-2	4	
52.412.105.01-2	12				33.690.716.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.065.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.318.003.01-2	43.601.103.02-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s
R	31.323.045.01-2	43°	22°	31.323.045.02-2	25°
NR	31.313.045.01-2			31.313.045.02-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_c	α_s
		CH-5mm	CH-7mm	CH-9mm
R	31.323.045.21-2	25°	20°	10°
NR	31.313.045.21-2			

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.045.01-2	43.621.410.01-2 43.624.410.01-2	34.613.045.01-2	33.390.716.01-2	3	30°
52.410.118.01-2	10				33.490.716.01-2	4	
52.412.118.01-2	12				33.690.716.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.065.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.318.003.01-2	43.601.103.02-2

LAB SCANBODY

30.413.002.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

1 mm

R	31.324.046.01-2	42°	21°
NR	31.314.046.01-2		

DYNAMIC 3TIBASEGINGIVAL HEIGHT α_s α_s α_s

1 mm

CH-5mm

CH-7mm

CH-9mm

R	31.324.046.21-2	30°	20°	10°
NR	31.314.046.21-2			

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.046.01-2	43.621.410.01-2 43.624.410.01-2	34.614.046.01-2	33.390.716.01-2	3	30°
52.410.125.01-2	10				33.490.716.01-2	4	
					33.690.716.01-2	6	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.065.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.318.003.01-2	43.601.103.02-2

LAB SCANBODY
 30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0,6 mm

R	31.322.047.01-2	45°	30°
NR	31.312.047.01-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s
0,6 mm CH+5mm CH+7mm CH+9mm

NR	31.312.047.21-2	30°	25°	20°
----	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.409.123.01-2	9	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2	34.612.047.01-2	33.390.716.01-2	3	25°
52.410.123.01-2	10				33.490.716.01-2	4	
52.412.123.01-2	12				33.690.716.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.074.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER TORX T6
40.320.007.02-2	43.601.107.01-2

LAB SCANBODY

30.412.001.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.047.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

0,6 mm

R	31.323.048.01-2	45°	30°
NR	31.313.048.01-2		

DYNAMIC 3TIBASEGINGIVAL HEIGHT α_s α_s α_s

0,6 mm

CH+5mm

CH+7mm

CH+9mm

R	31.323.048.21-2	30°	25°	20°
NR	31.313.048.21-2			

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.409.123.01-2	9	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2	34.612.047.01-2	33.390.716.01-2	3	30°
52.410.123.01-2	10				33.490.716.01-2	4	
52.412.123.01-2	12				33.690.716.01-2	6	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.074.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER TORX T6
40.320.007.02-2	43.601.107.01-2

LAB SCANBODY

30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL
HEIGHT
 α_s α_c
0,6 mm

R	31.321.049.01-2	45°	30°
NR	31.311.049.01-2		

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.311.049.01-2	43.621.410.01-2 43.624.410.01-2	34.611.049.01-2	33.325.472.01-2*	3	25°
52.410.116.01-2	10				33.425.472.01-2*	4	
52.412.116.01-2	12				33.625.472.01-2*	6	

* Only for titanium and soft materials

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.064.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.314.004.01-2	43.601.104.01-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT 0,5 mm		α_s	α_c	GINGIVAL HEIGHT 2 mm	
R	31.323.051.01-2	45°	27°	31.323.051.03-2	25°
NR	31.313.051.01-2			31.313.051.03-2	

DYNAMIC 3TIBASE

GINGIVAL HEIGHT 2 mm		α_s	α_c	α_s
		CH-5mm	CH-7mm	CH-9mm
R	31.323.051.23-2	25°	20°	15°
NR	31.313.051.23-2			

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.050.04-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.612.050.01-2	33.335.676.01-2	3	25°
52.410.117.01-2	10				33.435.676.01-2	4	
52.412.117.01-2	12				33.635.676.01-2	6	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.064.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.318.004.03-2	43.601.104.01-2

LAB SCANBODY
30.412.001.01-2

MULTI-UNIT

GINGIVAL HEIGHT 1 mm		GINGIVAL HEIGHT 2 mm
R	42.302.050.01-2	42.302.050.02-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 0.5 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s
R	31.323.051.01-2	45°	25°	31.323.051.03-2	25°
NR	31.313.051.01-2			31.313.051.03-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 2 mm	α_s	α_s CH-5mm	α_s CH-7mm	α_s CH-9mm
R	31.323.051.23-2	25°	20°	15°	
NR	31.313.051.23-2				

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.051.01-2	43.621.410.01-2 43.624.410.01-2	34.613.051.01-2	33.335.676.01-2	3	25°
52.410.118.01-2	10	50.313.051.04-2			33.435.676.01-2	4	
52.412.118.01-2	12	(IG-3mm)			33.635.676.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.064.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.318.004.03-2	43.601.104.01-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,3 mm

R	31.324.052.01-2	45°	27°
NR	31.314.052.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.052.04-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.614.052.01-2	33.335.676.01-2	3	30°
52.410.102.01-2	10				33.435.676.01-2	4	
52.412.102.01-2	12				33.635.676.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.064.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.318.004.03-2	43.601.104.01-2

LAB SCANBODY
30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0,6 mm

R	31.323.054.01-2	45°	25°
NR	31.313.054.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.054.01-2	43.621.410.01-2 43.624.410.01-2	34.614.054.01-2	33.345.856.01-2	3	30°
52.410.119.01-2	10				33.445.856.01-2	4	
52.412.119.01-2	12				33.645.856.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.067.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW
40.318.012.01-2

LAB SCANBODY

30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL
HEIGHT
0.5 mm

α_s α_c

R	31.324.057.01-2	45°	27°
NR	31.314.057.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.101.01-2	8	50.314.057.01-2	43.621.410.01-2 43.624.410.01-2	34.614.057.01-2	33.390.805.01-2	3	30°
52.410.101.01-2	10				33.490.805.01-2	4	
52.412.101.01-2	12				33.690.805.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.316.003.01-2	43.601.103.02-2

ANALOG

22.614.057.01-2

LAB SCANBODY

30.414.003.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL
HEIGHT
 α_s α_c
0.5 mm

R	31.324.058.01-2	45°	30°
NR	31.314.058.01-2		

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.058.01-2	43.621.410.01-2 43.624.410.01-2	34.614.058.01-2	33.390.716.01-2	3	30°
52.410.118.01-2	10				33.490.716.01-2	4	
52.412.118.01-2	12				33.690.716.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG
41.320.047.01-2	43.618.201.01-2	18	40.320.003.01-2	43.601.103.02-2	22.614.058.01-2
	43.624.201.01-2	24			LAB SCANBODY
	43.632.201.01-2	32			30.414.003.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0,7 mm

R	31.324.059.01-2	45°	27°
NR	31.314.059.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR
		50.313.010.01-2	43.621.410.01-2 43.624.410.01-2
52.410.115.01-2	10	50.313.010.04-2	
52.412.115.01-2	12	(IG=3mm)	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.065.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.716.01-2	3	30°
33.490.716.01-2	4	
33.690.716.01-2	6	

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG
40.318.003.01-2	43.601.103.02-2	22.614.059.01-2
		LAB SCANBODY 30.414.003.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.5 mm

R	31.324.060.01-2	45°	30°
NR	31.314.060.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.060.01-2	43.621.410.01-2 43.624.410.01-2	34.614.060.01-2	33.390.716.01-2	3	30°
52.410.122.01-2	10				33.490.716.01-2	4	
					33.690.716.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG
41.320.060.01-2	43.618.201.01-2	18	40.320.003.02-2	43.601.103.02-2	22.614.060.01-2
	43.624.201.01-2	24			LAB SCANBODY
	43.632.201.01-2	32			30.415.007.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,6 mm

R	31.324.061.01-2	45°	30°
NR	31.314.061.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.061.01-2	43.621.410.01-2 43.624.410.01-2	34.614.061.01-2	33.390.958.01-2	3	30°
52.410.125.01-2	10				33.490.958.01-2	4	
					33.690.958.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.325.067.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER UNIGRIP	ANALOG
40.325.008.01-2	43.625.108.01-2	22.614.060.01-2
		LAB SCANBODY 30.415.007.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c			
0,6 mm			
R	31.323.066.01-2	45°	30°

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.039.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.314.008.01-2	43.625.108.01-2
LAB SCANBODY	
30.412.001.01-2	

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0,6 mm

R	31.323.074.01-2	45°	30°
NR	31.313.074.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.408.110.01-2	8	50.313.074.01-2	43.621.410.01-2 43.624.410.01-2	34.613.074.01-2	33.330.708.01-2	3	30°	23.413.074.01-2
52.410.110.01-2	10				33.430.708.01-2	4		
52.412.110.01-2	12				33.630.708.01-2	6		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.050.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

ANALOG

22.613.074.01-2

LAB SCANBODY

30.415.007.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	α_s	GINGIVAL HEIGHT 4 mm	α_s
R	31.322.075.01-2	42°	24°	31.322.075.02-2	20°	15°	31.322.075.03-2	20°	31.322.075.04-2	15°
NR				31.312.075.02-2			31.312.075.03-2		31.312.075.04-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_s	α_s
		CH-5mm	CH-7mm	CH-9mm
R	31.322.075.21-2	30°	20°	15°

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.105.01-2	10	50.312.075.03-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.612.075.01-2	33.330.734.01-2	3	25°
52.412.105.01-2	12				33.430.734.01-2	4	
					33.630.734.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.077.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW
40.318.013.01-2

ANALOG

22.612.075.01-2

LAB SCANBODY

30.412.001.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.075.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E

MULTI-UNIT

	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.302.075.02-2	42.302.075.03-2	42.302.075.04-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,4 mm

R	31.324.080.01-2	45°	30°
NR	31.314.080.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.080.01-2	43.621.410.01-2 43.624.410.01-2	34.614.080.01-2	33.370.716.01-2	3	30°
52.410.124.01-2	10				33.470.716.01-2	4	
52.412.124.01-2	12				33.670.716.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.071.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.317.004.01-2	43.601.104.01-2

ANALOG

22.614.080.01-2

LAB SCANBODY

30.414.003.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.080.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.104.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.4 mm

R	31.325.081.01-2	41°	18°
NR	31.315.081.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.315.081.01-2	43.621.410.01-2 43.624.410.01-2	34.615.081.01-2	33.335.676.01-2	3	30°
52.410.126.01-2	10				33.435.676.01-2	4	
52.412.126.01-2	12				33.635.676.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.064.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.318.004.03-2	43.601.104.01-2

LAB SCANBODY

30.414.003.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

1,2 mm

R	31.322.082.01-2	45°	25°
NR	31.312.082.01-2		

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.082.01-2	43.621.410.01-2 43.624.410.01-2	34.612.082.01-2	33.345.804.01-2	3	25°
52.410.105.01-2	10				33.445.804.01-2	4	
52.412.105.01-2	12				33.645.804.01-2	6	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.074.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW
40.316.012.01-2

LAB SCANBODY

30.412.001.01-2

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

4 mm

R	42.302.082.01-2	42.302.082.02-2	42.302.082.03-2	42.302.082.04-2
---	-----------------	-----------------	-----------------	-----------------

MULTI-UNIT 4.0

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

3 mm

4 mm

R	61.302.021.01-2	61.302.021.03-2	61.302.021.04-2
---	-----------------	-----------------	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

1.2 mm

R	31.323.083.01-2	45°	25°
NR	31.313.083.01-2		

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.083.01-2	43.621.410.01-2 43.624.410.01-2	34.613.083.01-2	33.345.856.01-2	3	30°
52.410.103.01-2	10				33.445.856.01-2	4	
52.412.103.01-2	12				33.645.856.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.076.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW
40.318.012.02-2

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

4 mm

R	42.303.083.01-2	42.303.083.02-2	42.303.083.03-2	42.303.083.04-2
---	-----------------	-----------------	-----------------	-----------------

MULTI-UNIT 4.0

GINGIVAL HEIGHT GINGIVAL HEIGHT

3 mm

4 mm

R	61.302.083.03-2	61.302.083.04-2
---	-----------------	-----------------

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s

1 mm

R	31.321.084.01-2	40°
NR	31.311.084.01-2	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)		STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	
41.314.076.01-2	43.618.201.01-2	18		40.314.003.03-2	43.601.103.02-2	LAB SCANBODY 30.410.006.01-2
	43.624.201.01-2	24				
	43.632.201.01-2	32				

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.3 mm

R	31.324.085.01-2	45°	30°
NR	31.314.085.01-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s

0.3 mm

CH-5mm

CH-7mm

CH-9mm

NR	31.314.085.21-2	30°	25°	20°
----	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.314.085.01-2	43.621.410.01-2 43.624.410.01-2	34.614.085.01-2	33.345.856.01-2	3	25°
52.410.117.01-2	10				33.445.856.01-2	4	
52.412.117.01-2	12				33.645.856.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.081.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.316.004.02-2	43.601.104.01-2

LAB SCANBODY

30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

1 mm

R	31.325.086.01-2	45°
NR	31.315.086.01-2	

DYNAMIC SCANBODY (LAB/CLIN)

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR
		50.314.085.01-2	43.621.410.01-2 43.624.410.01-2
52.410.117.01-2	10		
52.412.117.01-2	12		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.081.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.345.856.01-2	3	25°
33.445.856.01-2	4	
33.645.856.01-2	6	

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	
40.316.004.02-2	43.601.104.01-2	
		LAB SCANBODY 30.415.007.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

0.3 mm

R	31.321.087.01-2	25°
NR	31.311.087.01-2	

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s GINGIVAL HEIGHT α_s α_s α_s

0.3 mm CH+5mm CH+7mm CH+9mm 2 mm CH+5mm CH+7mm CH+9mm

NR	31.311.087.21-2	20°	20°	15°	31.311.087.23-2	25°	20°	15°
----	-----------------	-----	-----	-----	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR
52.410.132.01-2	10	50.311.087.04-2 (IG+3mm)	43.621.415.01-2
52.412.132.01-2	12		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.094.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.04-2	43.625.105.01-2

LAB SCANBODY

30.410.006.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.087.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	SCREWDRIVER	43.625.105.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

0,3 mm

R	31.324.088.01-2	25°
NR	31.314.088.01-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.094.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.320.005.04-2	43.625.105.01-2

LAB SCANBODY

30.414.003.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.088.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		54.625.105.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	GINGIVAL HEIGHT 3 mm	α_c
R	31.321.090.01-2	45°	24°	31.321.090.02-2	25°	31.321.091.03-2	20°
NR	31.311.090.01-2			31.311.090.02-2		31.311.090.03-2	

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH+5mm	CH+7mm	CH+9mm
NR	31.311.090.21-2	30°	25°	15°

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.311.090.03-2 (IG+3mm)	43.621.415.01-2	34.611.090.01-2	33.325.472.01-2	3	25°
52.410.128.01-2	10				33.425.472.01-2	4	
					33.625.472.01-2	6	

*Only for R
*Only for titanium and soft materials

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.074.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.314.005.01-2	43.625.105.01-2

LAB SCANBODY
30.410.006.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1.2 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	GINGIVAL HEIGHT 3 mm	α_s	α_c	GINGIVAL HEIGHT 4 mm	α_s	α_c
R	31.324.091.01-2	38°	18°	31.324.091.02-2	25°	31.324.091.03-2	20°	25°	31.324.091.04-2	15°	25°
NR	31.314.091.01-2			31.314.091.02-2		31.314.091.03-2			31.314.091.04-2		

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 1.2 mm	α_s	α_s	α_s
		CH-5mm	CH-7mm	CH-9mm
NR	31.314.091.21-2	30°	25°	15°

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.102.01-2	10	50.314.091.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.614.091.01-2	33.390.958.01-2	3	30°
52.412.102.01-2	12				33.490.958.01-2	4	
					33.690.958.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	LAB SCANBODY
41.320.082.01-2	41.320.129.01-2	43.618.201.01-2	18	40.320.005.01-2	43.625.105.01-2	30.413.002.01-2
		43.624.201.01-2	24			
		43.632.201.01-2	32			

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.303.091.01-2	42.303.091.02-2	42.303.091.03-2	42.303.091.04-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	GINGIVAL HEIGHT 3 mm	α_s
R	31.325.092.01-2	45°	25°	31.325.092.02-2	25°	31.325.092.03-2	20°
NR	31.315.092.01-2			31.315.092.02-2		31.315.092.03-2	

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s
	1 mm	CH=5mm	CH=7mm	CH=9mm
NR	31.315.092.21-2	30°	25°	15°

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREW/DRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.315.092.01-2	43.621.410.01-2 43.624.410.01-2	34.615.092.01-2	33.390.958.01-2	3	30°
52.410.129.01-2	10	50.315.092.03-2 (IG-3mm)			33.490.958.01-2	4	
					33.690.958.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.074.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.320.005.01-2	43.625.105.01-2

LAB SCANBODY

30.415.007.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.092.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.625.105.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0,6 mm

R	31.324.096.01-2	45°	30°
NR	31.314.096.01-2		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.067.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DIGITAL ANALOG

DIGITAL ANALOG

34.614.096.01-2

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL SHANK α_{di}

33.315.708.01-2	3	30°
33.415.708.01-2	4	
33.615.708.01-2	6	

STRAIGHT SCREWS

STRAIGHT SCREW SCREWDRIVER TORX T6

40.320.007.01-2	43.601.107.01-2
-----------------	-----------------

SCANALOG

23.414.096.01-2

ANALOG

22.614.096.01-2

LAB SCANBODY

30.414.008.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.096.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.107.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.5 mm

R	31.323.101.01-2	45°	30°
---	-----------------	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC MILLING TOOL			SCANALOG	REFERENCE SCANBODY					
SCANBODY	HEIGHT mm	ADAPTOR	SCREW/DRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS		TYPE		
52.409.133.01-2	9	50.313.101.01-2	43.621.410.01-2 43.624.410.01-2	34.613.101.01-2	33.335.676.01-2	3	30°	23.413.101.01-2	54.322.101.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A			
					33.435.676.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B			
					33.635.676.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C			
DYNAMIC SCREWS				STRAIGHT SCREWS			MINI SCANBODY	LAB SCANBODY						
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREW/DRIVER LENGTH (mm)	STRAIGHT SCREW	SCREW/DRIVER TORX T6	53.413.101.01-2								
41.314.043.01-2	41.314.050.31-2	43.618.201.01-2	18	40.314.007.01-2	43.601.107.01-2	30.413.005.01-2								
		43.624.201.01-2	24											
		43.632.201.01-2	32											
											CAPS		mm	
											49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)		3.8	
											49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)		6	
								49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)		8				
								SCREW/DRIVER		43.601.107.01-2				

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

1.8 mm

R	31.322.102.01-2	38°	18°
NR	31.312.102.01-2		

DYNAMIC 3TIBASEGINGIVAL HEIGHT α_s α_s α_s GINGIVAL HEIGHT α_s α_s α_s GINGIVAL HEIGHT α_s α_s α_s

1 mm

CH-5mm

CH-7mm

CH-9mm

1.8 mm

CH-5mm

CH-7mm

CH-9mm

3 mm

CH-5mm

CH-7mm

CH-9mm

R	31.322.102.29-2	30°	25°	20°	31.322.102.21-2	25°	15°	10°	31.322.102.23-2	20°	20°	15°
NR	31.312.102.29-2				31.312.102.21-2				31.312.102.23-2			

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL****SCANALOG****SCANBODY OP**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS	TYPE
52.410.128.01-2	10	50.312.102.03-2 (IG-3mm)	43.621.415.01-2	34.612.102.01-2	33.345.856.01-2	3	25°	23.412.102.01-2	54.315.102.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
					33.445.856.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
					33.635.856.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
										49.416.000.04-2 (13 mm)	D
										49.416.000.05-2 (13 mm)	E

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.065.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.317.005.02-2	43.625.105.01-2

LAB SCANBODY
30.412.001.01-2

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

4 mm

R	42.302.102.01-2	42.302.102.02-2	42.302.102.03-2	42.302.102.04-2
---	-----------------	-----------------	-----------------	-----------------

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT

25/3.9 mm

NR	48.312.102.02-2
----	-----------------

MULTI-UNIT 4.0

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

4 mm

R	61.302.102.01-2	61.302.102.02-2	61.302.102.03-2	61.302.102.04-2
---	-----------------	-----------------	-----------------	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

1.2 mm

R	31.322.109.01-2	45°	29°
NR	31.312.109.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.109.01-2	43.621.415.01-2	34.612.109.01-2	33.360.754.01-2*	3	25°
52.410.128.01-2	10				33.460.754.01-2*	4	
					33.660.754.01-2*	6	

*Only for R

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.070.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.314.005.02-2	43.625.105.01-2

ANALOG

22.612.109.01-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,4 mm

R	31.320.110.01-2	45°	30°
NR	31.310.110.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.110.04-2 IG-3mm	43.621.410.01-2 43.624.410.01-2	34.610.110.01-2	33.360.756.01-2*	3	20°
52.410.117.01-2	10				33.460.756.01-2*	4	
52.412.117.01-2	12				33.660.756.01-2*	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.083.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER TORX T6
40.318.007.01-2	43.601.107.01-2

LAB SCANBODY
30.410.006.01-2

COMPATIBLE WITH O111

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 0.4 mm	α_s	α_c	GINGIVAL HEIGHT 2.5 mm	α_s
R	31.323.111.01-2	45°	30°		25°
NR	31.313.111.01-2			31.313.111.03-2	

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.110.04-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.610.110.01-2	33.360.756.01-2	3	20°
52.410.117.01-2	10				33.460.756.01-2	4	
52.412.117.01-2	12				33.660.756.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	LAB SCANBODY
41.318.083.01-2	43.618.201.01-2	18	40.318.007.01-2	43.601.107.01-2	30.413.002.01-2
	43.624.201.01-2	24			
	43.632.201.01-2	32			

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.303.111.01-2	42.303.111.02-2	42.303.111.03-2	42.303.111.04-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	GINGIVAL HEIGHT 2 mm	α_s
R	31.321.119.01-2	35°	31.321.119.02-2	30°
NR	31.311.119.01-2		31.311.119.02-2	

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.311.119.03-2 IG-3mm	43.621.415.01-2	34.611.119.01-2	33.360.756.01-2	3	25
52.410.132.01-2	10				33.460.756.01-2	4	
52.412.132.01-2	12				33.660.756.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.080.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.07-2	43.625.105.01-2

LAB SCANBODY
30.410.006.01-2

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.301.119.01-2	42.301.119.02-2	42.301.119.03-2	42.301.119.04-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT 35/4.9 mm
NR	48.312.119.03-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_s			
1 mm			
R	31.323.121.01-2	45°	25°
NR	31.313.121.01-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT				α_s	α_s	α_s	GINGIVAL HEIGHT				α_s	α_s	α_s
2 mm				CH+5mm	CH+7mm	CH+9mm	3 mm				CH+5mm	CH+7mm	CH+9mm
NR	31.313.121.22-2	25°	20°	15°	31.313.121.23-2	25°	20°	10°					

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.108.01-2	10	50.312.120.03-2 IG+3mm	43.621.410.01-2 43.624.410.01-2	34.612.120.01-2	33.360.754.01-2	3	20°
52.412.108.01-2	12				33.460.754.01-2	4	
					33.660.754.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
41.316.080.01-2	43.618.201.01-2	18	40.316.005.07-2	43.625.105.01-2
	43.624.201.01-2	24		
	43.632.201.01-2	32		

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1 mm		2 mm		3 mm		4 mm	
R	42.303.121.01-2	42.303.121.02-2		42.303.121.03-2		42.303.121.04-2	

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT		GINGIVAL HEIGHT
2.5/3.9 mm		3.5/4.9 mm
NR	48.302.120.02-2	48.312.120.03-2

MULTI-UNIT 4.0

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1 mm		2 mm		3 mm		4 mm	
R	61.303.121.01-2	61.303.121.02-2		61.303.121.03-2		61.303.121.04-2	

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

1 mm

R	31.323.121.01-2	45°	25°
NR	31.313.121.01-2		

DYNAMIC 3TIBASEGINGIVAL HEIGHT α_s α_s α_s GINGIVAL HEIGHT α_s α_s α_s

2 mm

CH+5mm

CH+7mm

CH+9mm

3 mm

CH+5mm

CH+7mm

CH+9mm

NR	31.313.121.22-2	25°	20°	15°	31.313.121.23-2	25°	20°	10°
----	-----------------	-----	-----	-----	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.121.01-2			33.360.754.01-2	3	20°
52.410.109.01-2	10	50.313.121.03-2 IG+3mm	43.621.410.01-2 43.624.410.01-2	34.613.121.01-2	33.460.754.01-2	4	
52.412.109.01-2	12				33.660.754.01-2	6	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.080.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.07-2	43.625.105.01-2

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

4 mm

R	42.303.121.01-2	42.303.121.02-2	42.303.121.03-2	42.303.121.04-2
---	-----------------	-----------------	-----------------	-----------------

MULTI-UNIT 4.0

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

4 mm

R	61.303.121.01-2	61.303.121.02-2	61.303.121.03-2	61.303.121.04-2
---	-----------------	-----------------	-----------------	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c			
1.4 mm			
R	31.324.124.01-2	42°	19°
NR	31.314.124.01-2		

DYNAMIC SCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_d
		50.314.124.01-2	43.621.410.01-2 43.624.410.01-2	34.614.124.01-2	33.335.758.01-2	3	30°
52.410.125.01-2	10				33.435.758.01-2	4	
					33.635.758.01-2	6	
DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)					
41.320.075.01-2	43.618.201.01-2	18	40.320.008.02-2 43.625.108.01-2				
	43.624.201.01-2	24					
	43.632.201.01-2	32					

LAB SCANBODY
30.414.003.01-2

SCANBODY OP		
SCANBODY	PEEK PINS	TYPE
54.315.124.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.625.108.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
1.1 mm				2 mm			
R	31.323.125.01-2	42°	20°	31.323.125.02-2	25°	15°	
NR	31.313.125.01-2			31.313.125.02-2			

DYNAMIC 3TIBASE

GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s	α_s	α_s
1.1 mm		CH-5mm	CH-7mm	CH-9mm	3 mm		CH-5mm	CH-7mm	CH-9mm
R	31.323.125.21-2	30°	25°	15°		20°	15°	10°	
NR	31.313.125.21-2				31.313.125.23-2				

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.125.01-2	43.621.410.01-2 43.624.410.01-2	34.613.125.01-2	33.315.804.01-2	3	25°
52.410.117.01-2	10				33.415.804.01-2	4	
52.412.117.01-2	12				33.615.804.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6
41.316.078.01-2	41.316.124.01-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2
		43.624.201.01-2	24		
		43.632.201.01-2	32		

LAB SCANBODY

30.413.002.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.125.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

MULTI-UNIT

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1 mm		2 mm		3 mm		4 mm	
R	42.303.125.01-2	42.303.125.02-2	42.303.125.03-2	42.303.125.04-2			

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1.5/2.9 mm		2.5/3.9 mm		3.5/4.9 mm	
NR	48.312.125.01-2	48.312.125.02-2	48.312.125.03-2		

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT			
α_s α_c			
2,5 mm			
NR	31.322.128.01-2	45°	30°

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.044.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.320.003.05-2	43.601.103.01-2
LAB SCANBODY	
30.413.002.01-2	

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

0,3 mm

R	31.325.129.01-2	35°	30°
NR	31.315.129.01-2		

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.315.129.01-2	43.621.410.01-2 43.624.410.01-2	34.615.129.01-2	33.390.958.01-2	3	30°
52.410.130.01-2	10				33.490.958.01-2	4	
					33.690.958.01-2	6	

DYNAMIC SCREWS**STRAIGHT SCREWS**

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.090.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER UNIGRIP	ANALOG
40.320.008.03-2	43.625.108.01-2	22.615.129.01-2
		LAB SCANBODY 30.415.007.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c
0.5 mm			
R	31.322.130.01-2	30°	29°
NR	31.312.130.01-2		

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.081.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.08-2	43.625.105.01-2
LAB SCANBODY	
30.412.001.01-2	

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.5 mm

R	31.323.131.01-2	45°	29°
NR	31.313.131.01-2		

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s

0.5 mm

CH+5mm

CH+7mm

CH+9mm

R	31.323.131.21-2	30°	20°	15°
NR	31.313.131.21-2			

DYNAMIC SCREWS

DYNAMIC
SCREWDYNAMIC
SCREWDRIVERSCREWDRIVER
LENGTH (mm)

41.316.081.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT
SCREWSCREWDRIVER
Hex. 1.27

40.316.005.08-2	43.625.105.01-2
-----------------	-----------------

LAB SCANBODY

30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s	α_c
0.5 mm			
R	31.324.132.01-2	45°	28°
NR	31.314.132.01-2		

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.081.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.316.005.08-2	43.625.105.01-2

LAB SCANBODY

30.414.003.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

1 mm

R	31.320.135.01-2	45°	30°
NR	31.310.135.01-2		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.080.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.315.804.01-2	3	25°
33.415.804.01-2	4	
33.615.804.01-2	6	

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER TORX T6
40.314.007.02-2	43.601.107.01-2

LAB SCANBODY

30.410.006.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.135.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.107.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 0,7 mm	α_s	α_c	GINGIVAL HEIGHT 1,5 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm	α_s	GINGIVAL HEIGHT 5 mm	α_s
R	31.320.136.01-2	45°	30°	31.320.136.02-2	25°	20°	31.320.136.04-2	31.320.136.05-2	20°	31.320.136.06-2	15°
NR	31.310.136.01-2			31.310.136.02-2			31.310.136.04-2	31.310.136.05-2		31.310.136.06-2	

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.136.01-2			33.360.754.01-2	3	25°
52.410.128.01-2	10	50.310.136.04-2	43.621.415.01-2	34.610.136.01-2	33.460.754.01-2	4	
		IG=3mm			33.660.754.01-2	6	

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	LAB SCANBODY
41.316.071.01-2	43.618.201.01-2	18	40.316.004.03-2	43.601.104.01-2	30.410.006.01-2
	43.624.201.01-2	24			
	43.632.201.01-2	32			

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.300.136.01-2	42.300.136.02-2	42.300.136.3-2	42.300.136.04-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,6 mm

R	31.324.137.01-2	45°	30°
NR	31.314.137.01-2		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.044.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER TORX T6	
40.320.007.04-2	43.601.107.01-2	LAB SCANBODY 30.414.008.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s
1.5 mm		
R	31.320.145.01-2	45°
NR	31.310.145.01-2	

DYNAMIC SCANBODY
(LAB/CLIN)

SCANBODY	HEIGHT mm
52.410.128.01-2	10

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.315.078.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	
40.314.005.01-2	43.601.105.01-2	
		LAB SCANBODY
		30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
1.5 mm

R	31.323.149.01-2	45°	29°
NR	31.313.149.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
					33.320.704.01-2*	3	25°
52.410.132.01-2	10	50.310.161.01-2	43.621.415.01-2	34.610.161.01-2	33.420.704.01-2*	4	
52.412.132.01-2	12				33.620.704.01-2*	6	

*Only for R

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.079.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT
SCREW

40.316.014.01-2

LAB SCANBODY

30.413.002.01-2

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT
1 mm 2 mm 3 mm

R	42.302.161.01-2	42.302.161.02-2	42.302.161.03-2
---	-----------------	-----------------	-----------------

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT

3/4.4 mm

R	48.312.161.05-2
---	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s		
0,5 mm		
R	31.323.150.01-2	45°

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.046.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.413.005.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL
HEIGHT α_s α_c
0.3 mm

R	31.323.151.01-2	45°	30°
---	-----------------	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.409.123.01-2	9	50.313.151.01-2	43.621.410.01-2 43.624.410.01-2	34.613.151.01-2	33.390.716.01-2	3	30°
					33.490.716.01-2	4	
					33.690.716.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.039.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.314.008.01-2	43.625.108.01-2

DYNAMIC SCREWS

DYNAMIC
SCREW

41.317.040.01-2

REFERENCE SCANBODY		
SCANBODY	PEEK PINS	TYPE
54.322.158.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
SCREWDRIVER		43.625.105.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

1,5 mm

R	31.320.159.01-2	41°	17°
NR	31.310.159.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.159.01-2	43.621.415.01-2	34.610.159.01-2	33.335.754.01-2*	3	25°
52.410.128.01-2	10				33.435.754.01-2*	4	
					33.635.754.01-2*	6	

*Only for R

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.067.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.314.008.02-2	43.625.108.01-2

ANALOG

22.610.159.01-2

LAB SCANBODY

30.410.006.01-2

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

4 mm

R	42.300.159.01-2	42.300.159.02-2	42.300.159.03-2	42.300.159.04-2
---	-----------------	-----------------	-----------------	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,5 mm

R	31.320.160.01-2	45°	30°
NR	31.310.160.01-2		

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL
SCANALOG

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}	
		50.310.160.01-2	43.621.415.01-2	34.610.160.01-2	33.315.804.01-2	3	25°	23.410.160.01-2
52.410.131.01-2	10				33.415.804.01-2	4		
					33.615.804.01-2	6		

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.078.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG
40.316.007.01-2	43.601.107.01-2	22.610.160.01-2
		LAB SCANBODY 30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

1,5 mm

R	31.320.161.01-2	45°	25°
NR	31.310.161.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.161.01-2	43.621.415.01-2	34.610.161.01-2	33.320.704.01-2*	3	25°
52.410.132.01-2	10				33.420.704.01-2*	4	
52.412.132.01-2	12				33.620.704.01-2*	6	

*Only for R

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.079.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW
40.316.014.01-2

LAB SCANBODY

30.410.006.01-2

MULTI-UNIT

GINGIVAL HEIGHT GINGIVAL HEIGHT GINGIVAL HEIGHT

1 mm

2 mm

3 mm

R	42.302.161.01-2	42.302.161.02-2	42.302.161.03-2
---	-----------------	-----------------	-----------------

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT

3/4,4 mm

R	48.312.161.05-2
---	-----------------

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
1,5 mm

R	31.324.162.01-2	45°	24°
NR	31.314.162.01-2		

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.161.01-2	43.621.415.01-2	34.610.161.01-2	33.320.704.01-2*	3	25°
52.410.132.01-2	10				33.420.704.01-2*	4	
52.412.132.01-2	12				33.620.704.01-2*	6	

*Only for **R**

DYNAMIC SCREWS
STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.079.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

**STRAIGHT
SCREW**

40.316.014.01-2

LAB SCANBODY

30.414.003.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,5 mm

R	31.323.163.01-2	45°	30°
---	-----------------	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.112.01-2	8	50.313.163.01-2	43.620.411.01-2	34.613.163.01-2	33.390.716.01-2	3	30°
					33.490.716.01-2	4	
					33.690.716.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.039.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT
SCREW

40.314.014.01-2

LAB SCANBODY

30.413.005.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0,9 mm

R	31.320.166.01-2	45°	30°
NR	31.310.166.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.166.03-2 IG-3mm	43.621.415.01-2	34.610.166.01-2	33.335.754.01-2	3	25°
52.410.128.01-2	10				33.435.754.01-2	4	
					33.635.754.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.084.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c

0.9 mm

R	31.322.167.01-2	43°	30°
NR	31.312.167.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.313.167.03-2 (IG+ 3mm)	43.621.410.01-2 43.624.410.01-2	34.613.167.01-2	33.330.734.01-2	3	20°
52.410.117.01-2	10				33.430.734.01-2	4	
52.412.117.01-2	12				33.630.734.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.316.004.01-2	43.601.104.01-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s			GINGIVAL HEIGHT α_s			GINGIVAL HEIGHT α_s		
0,6 mm			1,5 mm			3 mm		
R	31.322.169.01-2	45°	29°	31.322.169.02-2	25°	15°	31.322.169.04-2	20°
NR	31.312.169.01-2			31.312.169.02-2			31.312.169.04-2	

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s			GINGIVAL HEIGHT α_s			GINGIVAL HEIGHT α_s		
1,5 mm			CH-5mm	CH-7mm	CH-9mm	3 mm		
R	31.322.169.22-2	30°	25°	15°	31.322.169.24-2	25°	20°	15°
NR	31.312.169.22-2							

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.169.01-2	43.621.410.01-2 43.624.410.01-2	34.612.169.01-2	33.330.734.01-2	3	25°
52.410.117.01-2	10	50.312.169.04-2			33.430.734.01-2	4	
52.412.117.01-2	12	IG-3mm			33.630.734.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.070.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

MULTI-UNIT

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1 mm		2 mm		3 mm		4 mm	
R	42.302.169.01-2	42.302.169.02-2	42.302.169.03-2	42.302.169.04-2			

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT		GINGIVAL HEIGHT		GINGIVAL HEIGHT	
1,5/2,9 mm		2,5/3,9 mm		3,5/4,9 mm	
NR	48.312.169.01-2	48.312.169.02-2	48.312.169.03-2		

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.169.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.104.01-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s

0.3 mm

R	31.322.170.01-2	38°
NR	31.312.170.01-2	

DYNAMIC 3TIBASEGINGIVAL HEIGHT α_s α_s α_s

0.3 mm

CH-5mm

CH-7mm

CH-9mm

R	31.322.170.21-2	30°	20°	15°
NR	31.312.170.21-2			

DYNAMIC SCANBODY (L/C)SCANBODY HEIGHT
mm

52.410.104.01-2	10
52.412.104.01-2	12

DYNAMIC SCREWS

DYNAMIC SCREW DYNAMIC SCREWDRIVER SCREWDRIVER LENGTH (mm)

41.316.079.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOLDYNAMIC MILLING TOOL SHANK α_{di}

33.390.754.01-2	3	25°
33.490.754.01-2	4	
33.690.754.01-2	6	

SCANBODY OP

SCANBODY PEEK PINS TYPE

54.315.170.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

LAB SCANBODY

30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s
0.3 mm		
R	31.323.171.01-2	35°
NR	31.313.171.01-2	

DYNAMIC SCANBODY (L/C)

SCANBODY	HEIGHT mm
52.410.117.01-2	10
52.412.117.01-2	12

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.079.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.754.01-2	3	25°
33.490.754.01-2	4	
33.690.754.01-2	6	

LAB SCANBODY
30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c			
0.5 mm			
R	31.323.173.01-2	45°	30°

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.040.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.413.005.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s		
0.5 mm		
NR	31.310.176.01-2	35°

DYNAMIC SCANBODY (LAB/CLIN)			DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR
52.408.138.01-2	8	50.310.176.01-2	43.621.415.01-2
			34.610.176.01-2

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.044.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.360.756.01-2	3	35°
33.460.756.01-2	4	
33.660.756.01-2	6	

LAB SCANBODY
30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

1,5 mm

R	31.320.178.01-2	45°
NR	31.310.178.01-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.080.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

0.4 mm

R	31.322.181.01-2	45°
---	-----------------	-----

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s

0.4 mm

CH-5mm

CH-7mm

CH-9mm

R	31.322.181.21-2	30°	30°	20°
---	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR
52.408.112.01-2	8	50.312.181.01-2	43.620.411.01-2

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.043.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL	SHANK	α_{di}	
33.360.756.01-2	3	30°	23.412.181.01-2
33.460.756.01-2	4		
33.660.756.01-2	6		

SCANALOG

LAB SCANBODY

30.413.005.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

0,5 mm

R	31.322.183.01-2	45°
---	-----------------	-----

DYNAMIC SCANBODY (LAB/CLIN)			DIGITAL ANALOG	DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK α_{di}
52.408.136.01-2	8	50.312.183.01-2	43.620.411.01-2	34.612.183.01-2	33.330.734.01-2	3
					33.430.734.01-2	4
					33.630.734.01-2	6

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.048.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

REFERENCE SCANBODY		
SCANBODY	PEEK PINS	TYPE
54.322.183.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s
	1.2 mm			2.5 mm			3.5 mm	
R	31.323.186.01-2	40°	30°	31.323.186.02-2	20°	18°	31.323.186.03-2	15°
NR	31.313.186.01-2			31.313.186.02-2			31.313.186.03-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	α_s	α_s	α_s
	1.2 mm	CH-5mm	CH-7mm	CH-9mm	2.5 mm	CH-5mm	CH-7mm	CH-9mm
R	31.323.186.21-2	30°	25°	15°	31.323.186.22-2	30°	25°	15°
NR	31.313.186.21-2				31.313.186.22-2			

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.101.01-2	8	50.313.186.04-2 (IG-3mm)	43.621.410.01-2 43.624.410.01-2	34.613.186.01-2	33.330.734.01-2	3	25°
52.410.101.01-2	10				33.430.734.01-2	4	
52.412.101.01-2	12				33.630.734.01-2	6	

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW
41.316.084.02-2	43.618.201.01-2	18	40.316.008.04-2
	43.624.201.01-2	24	
	43.632.201.01-2	32	

LAB SCANBODY

30.413.002.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.186.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E

MULTI-UNIT

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm	5 mm
R	42.303.186.01-2	42.303.186.02-2	42.303.186.03-2	42.303.186.04-2	42.303.186.05-2

ANGULATED MULTI-UNIT 20°

	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	2.5/3.9 mm	3.5/4.9 mm
NR	48.312.186.02-2	48.312.186.03-2

MULTI-UNIT 4.0

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm	5 mm
R	61.303.186.01-2	61.303.186.02-2	61.303.186.03-2	61.303.186.04-2	61.303.186.05-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 0,3 mm	α_s	α_c	GINGIVAL HEIGHT 0,5 mm	α_s	α_c	GINGIVAL HEIGHT 1 mm	α_s
R	31.322.009.01-2	45°	25°	31.322.009.02-2	25°	25°	31.322.009.03-2	25°
NR	31.312.009.01-2			31.312.009.02-2			31.312.009.03-2	

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.312.187.01-2	43.621.410.01-2 43.624.410.01-2	34.612.187.01-2	33.390.716.01-2	3	25°
52.410.114.01-2	10				33.490.716.01-2	4	
52.412.114.01-2	12				33.690.716.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.059.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s
1,5 mm		
R	31.320.188.01-2	45°
NR	31.310.188.01-2	

DYNAMIC SCANBODY
(LAB/CLIN)

SCANBODY	HEIGHT mm
52.410.128.01-2	10

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.315.078.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

1.8 mm

R	31.320.190.01-2	45°
NR	31.310.190.01-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.410.006.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s
0.8 mm		
R	31.322.191.01-2	45°
NR	31.312.191.01-2	

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.316.003.01-2	43.601.103.02-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s

0.3 mm

R	31.323.192.01-2	45°
---	-----------------	-----

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.048.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.413.005.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s		
0.3 mm		
R	31.323.193.01-2	45°

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.051.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER
40.318.005.01-2	43.601.105.01-2

LAB SCANBODY
30.413.005.01-2

REFERENCE SCANBODY		
SCANBODY	PEEK PINS	TYPE
54.322.193.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
	SCREWDRIVER	43.625.105.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

0,5 mm

R	31.323.195.01-2	45°
---	-----------------	-----

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s

0,5 mm

CH-5mm

CH-7mm

CH-9mm

R	31.323.195.21-2	30°	25°	25°
---	-----------------	-----	-----	-----

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREW Ø2.6	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.041.01-2	41.317.052.36-2	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.716.01-2	3	25
33.490.716.01-2	4	
33.690.716.01-2	6	

LAB SCANBODY

30.413.005.01-2

REFERENCE SCANBODY

SCANBODY	PEEK PINS	TYPE
54.322.195.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
	SCREWDRIVER	43.601.104.01-2

STANDARD DYNAMIC TIBASE					
GINGIVAL HEIGHT 1.2 mm		α_s	GINGIVAL HEIGHT 2 mm		α_s
R	31.320.196.01-2	40°	31.320.196.02-2	25°	31.320.196.03-2
NR	31.310.196.01-2		31.310.196.02-2		31.310.196.03-2

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)
41.316.086.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.410.006.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1.2 mm	α_s	α_c	GINGIVAL HEIGHT 2 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	α_s
R	31.322.197.01-2	35°	25°	31.322.197.02-2	20°	25°	31.322.197.03-2	20°
NR	31.312.197.01-2			31.312.197.02-2			31.312.197.03-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)
41.316.086.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s
1.2 mm		
R	31.324.198.01-2	40°
NR	31.314.198.01-2	

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)
41.316.086.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.414.003.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

0,3 mm

R	31.322.205.01-2	45°
---	-----------------	-----

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.112.01-2	8	50.312.205.01-2	43.620.411.01-2	34.612.205.01-2	33.390.716.01-2	3	30°
					33.490.716.01-2	4	
					33.690.716.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.040.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.412.001.01-2

REFERENCE SCANBODY

SCANBODY	PEEK PINS	TYPE
54.322.205.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
	SCREWDRIVER	43.625.105.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1,5 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	α_s	GINGIVAL HEIGHT 4 mm	α_s
R	31.320.207.01-2	35°	15°	31.320.207.03-2	20°	31.320.207.04-2	15°
NR	31.310.207.01-2			31.310.207.03-2		31.310.207.04-2	

DYNAMIC 3TIBASE

	GINGIVAL HEIGHT 1,5 mm	α_s	α_c	α_s	GINGIVAL HEIGHT 3 mm	α_s	α_s	α_s
R	31.320.207.21-2	25°	20°	15°	31.320.207.23-2	20°	15°	10°
NR	31.310.207.21-2				31.310.207.23-2			

DYNAMIC SCANBODY (LAB/CLIN)
DIGITAL ANALOG
DYNAMIC MILLING TOOL

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.103.01-2	10	50.310.207.03-2 IG-3mm	43.621.410.01-2 43.624.410.01-2	34.610.207.01-2	33.345.856.01-2*	3	30°
52.412.103.01-2	12				33.445.856.01-2*	4	
					33.645.856.01-2*	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.066.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.302.207.01-2	42.302.207.02-2	42.302.207.03-2	42.302.207.04-2

ANGULATED MULTI-UNIT

	GINGIVAL HEIGHT 2,5/3,9mm	GINGIVAL HEIGHT 3,5/4,9 mm	GINGIVAL HEIGHT 4,5/5,9 mm
NR	48.312.207.02-2	48.312.207.03-2	48.312.207.04-2

*Only for R

LAB SCANBODY

30.410.006.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.207.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.107.01-2

MULTI-UNIT 4.0

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	61.302.207.01-2	61.302.207.02-2	61.302.207.03-2	61.302.207.04-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
1,5 mm

R	31.324.208.01-2	45°	20°
NR	31.314.208.01-2		

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.207.03-2 IG-3mm	43.621.410.01-2 43.624.410.01-2	34.614.208.01-2	33.345.856.01-2*	3	30°
52.410.103.01-2	10				33.445.856.01-2*	4	
52.412.103.01-2	12				33.645.856.01-2*	6	

*Only for R

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.066.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.414.003.01-2

SCANBODY	PEEK PINS	TYPE
54.315.207.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.107.01-2

MULTI-UNIT

GINGIVAL HEIGHT 1 mm GINGIVAL HEIGHT 2 mm GINGIVAL HEIGHT 3 mm GINGIVAL HEIGHT 4 mm

R	42.302.207.01-2	42.302.207.02-2	42.302.207.03-2	42.302.207.04-2
---	-----------------	-----------------	-----------------	-----------------

ANGULATED MULTI-UNIT 20°

GINGIVAL HEIGHT 2,5/3,9 mm GINGIVAL HEIGHT 3,5/4,9 mm GINGIVAL HEIGHT 4,5/5,9 mm

R	48.312.207.02-2	48.312.207.03-2	48.312.207.04-2
---	-----------------	-----------------	-----------------

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	GINGIVAL HEIGHT 2 mm	α_s	GINGIVAL HEIGHT 3 mm	α_s
R	31.320.222.01-2	30°	31.320.222.02-2	25°	31.320.222.03-2	20°
NR	31.310.222.01-2		31.310.222.02-2		31.310.222.03-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.078.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DIGITAL ANALOG

DIGITAL ANALOG
34.610.222.01-2

DYNAMIC MILLING TOOL

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.315.604.01-2	3	25°
33.415.604.01-2	4	
33.615.604.01-2	6	

LAB SCANBODY

30.410.006.01-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.222.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	GINGIVAL HEIGHT 2 mm	α_s	α_c	GINGIVAL HEIGHT 3 mm	α_s	α_c
R	31.323.223.01-2	30°	31.323.223.02-2	25°	15°	31.323.223.03-2	20°	10°
NR	31.313.223.01-2		31.313.223.02-2			31.313.223.03-2		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)
41.316.078.02-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

DIGITAL ANALOG

DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
34.613.223.01-2	33.315.604.01-2	3	25°
	33.415.604.01-2	4	
	33.615.604.01-2	6	

DYNAMIC MILLING TOOL
SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.223.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

LAB SCANBODY

30.413.002.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s
0.5 mm		
R	31.320.229.01-2	40°
NR	31.310.229.01-2	

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.064.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.410.006.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s α_c

1,5 mm

R	31.322.236.01-2	20°	25°
NR	31.312.236.01-2		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.075.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.236.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.103.02-2

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s		
0.5 mm		
R	31.323.242.01-2	40°

DIGITAL ANALOG	DYNAMIC MILLING TOOL		
DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
34.613.242.01-2	33.370.716.01-2	3	25°
	33.470.716.01-2	4	
	33.670.716.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	DYNAMIC SCREW Ø2.6	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.045.01-2	41.318.055.01-2 (Direct MU)	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

LAB SCANBODY
30.413.005.01-2

REFERENCE SCANBODY		
SCANBODY	PEEK PINS	TYPE
54.322.242.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
SCREWDRIVER		43.601.104.01-2

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

MULTI-UNIT**GINGIVAL HEIGHT GINGIVAL HEIGHT**

2 mm

3 mm

R	42.303.243.02-2	42.303.243.03-2
---	-----------------	-----------------

STRAIGHT SCREWS

STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.316.003.01-2	43.601.103.02-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s		
0,6 mm		
R	31.323.245.01-2	40°

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)
41.314.039.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.413.005.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1 mm	α_s	GINGIVAL HEIGHT 2 mm	α_s
R	31.322.246.01-2	25°	31.322.246.02-2	25°
NR	31.312.246.01-2		31.312.246.02-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.080.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s		
0.3 mm		
R	31.323.247.01-2	40°

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.040.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.413.005.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s

1 mm

R	31.320.249.01-2	40°
NR	31.310.249.01-2	

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
		50.310.249.03-2 IG=3mm	43.621.415.01-2	34.610.249.01-2	33.315.804.01-2	3	25°
52.410.128.01-2	10				33.415.804.01-2	4	
					33.615.804.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.080.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.410.006.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1 mm			1.5 mm			3 mm		
R	31.322.251.01-2	40°	25°	31.322.251.02-2	40°	20°	31.322.251.04-2	25°	10°
NR	31.312.251.01-2			31.312.251.02-2			31.312.251.04-2		

DIGITAL ANALOG
**DIGITAL
ANALOG**

34.612.251.01-2

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6
41.316.064.02-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2
	43.624.201.01-2	24		
	43.632.201.01-2	32		

STRAIGHT SCREWS
MULTI-UNIT

	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
	1 mm	2 mm	3 mm	4 mm
R	42.302.251.01-2	42.302.251.02-2	42.302.251.03-2	42.302.251.04-2

SCANBODY OP

SCANBODY	PEEK PINS	TYPE
54.315.250.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.107.01-2

LAB SCANBODY

30.412.001.01-2

DYNAMIC SCREWS

**DYNAMIC
SCREW**

41.318.065.01-2

STRAIGHT SCREWS

**STRAIGHT
SCREW**

40.318.003.01-2

**SCREWDRIVER
Hex. 1.20**

43.601.103.02-2

MULTI-UNIT

	GINGIVAL HEIGHT 1 mm	GINGIVAL HEIGHT 2 mm	GINGIVAL HEIGHT 3 mm	GINGIVAL HEIGHT 4 mm
R	42.302.257.01-2	42.302.257.02-2	42.302.257.03-2	42.302.257.04-2

COMPATIBLE WITH O258

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s α_c
0.3 mm

R	31.323.025.01-2	45°	30°
---	-----------------	-----	-----

DYNAMIC 3TIBASE

GINGIVAL HEIGHT α_s α_s α_s
0.3 mm CH+5mm CH+7mm CH+9mm

R	31.323.025.21-2	30°	25°	10°
---	-----------------	-----	-----	-----

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

REFERENCE SCANBODY

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.408.112.01-2	8	50.313.025.02-2 50.313.025.01-2	43.621.410.01-2 43.624.410.01-2 43.620.411.01-2	34.613.025.01-2
52.410.111.01-2	10			

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.716.01-2	3	30
33.490.716.01-2	4	
33.690.716.01-2	6	

23.413.025.01-2

DYNAMIC SCREWS

STRAIGHT SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.039.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.314.005.04-2	43.625.105.01-2

MINI SCANBODY

53.413.025.01-2

ANALOG

22.613.025.01-2

LAB SCANBODY

30.413.005.01-2

SCANBODY	PEEK PINS	TYPE
54.322.025.31-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
	CAPS	mm
	49.418.000.01-2 (Regular) 49.418.000.02-2 (Wide)	3.8
	49.419.000.01-2 (Regular) 49.419.000.02-2 (Wide)	6
	49.420.000.01-2 (Regular) 49.420.000.02-2 (Wide)	8
	SCREWDRIVER	43.625.108.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s

0.5 mm

R	31.320.260.01-2	40°
NR	31.310.260.01-2	

DYNAMIC SCANBODY (LAB/CLIN)

DIGITAL ANALOG

DYNAMIC MILLING TOOL

SCANALOG

SCANBODY OP

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
		50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.610.260.01-2
52.410.103.01-2	10			
52.412.103.01-2	12			

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.345.856.01-2	3	30°
33.445.856.01-2	4	
33.645.856.01-2	6	

23.410.260.01-2

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.066.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.410.006.01-2

SCANBODY	PEEK PINS	TYPE
54.315.207.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A
	49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B
	49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.107.01-2

MULTI-UNIT

GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
1 mm	2 mm	3 mm	4 mm
R	42.302.207.01-2	42.302.207.02-2	42.302.207.03-2
			42.302.207.04-2

STANDARD DYNAMIC TIBASE
GINGIVAL HEIGHT α_s

0,5 mm

R	31.323.261.01-2	40°
NR	31.313.261.01-2	

DYNAMIC SCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC MILLING TOOL			SCANALOG	SCANBODY OP			
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		DYNAMIC MILLING TOOL	SHANK	α_{di}		SCANBODY	PEEK PINS		TYPE
		50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.613.261.01-2		33.345.856.01-2	3	30°	23.413.261.01-2	54.315.207.21-2	49.414.000.01-2 (6 mm) 49.415.000.01-2 (9 mm) 49.416.000.01-2 (13 mm)	A	
52.410.103.01-2	10					33.445.856.01-2	4				49.414.000.02-2 (6 mm) 49.415.000.02-2 (9 mm) 49.416.000.02-2 (13 mm)	B	
52.412.103.01-2	12					33.645.856.01-2	6				49.414.000.03-2 (6 mm) 49.415.000.03-2 (9 mm) 49.416.000.03-2 (13 mm)	C	
DYNAMIC SCREWS											49.416.000.04-2 (13 mm)	D	
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)							49.416.000.05-2 (13 mm)		E		
41.316.066.01-2	43.618.201.01-2	18							SCREWDRIVER		43.601.107.01-2		
	43.624.201.01-2	24											
	43.632.201.01-2	32											
MULTI-UNIT													

LAB SCANBODY

30.413.004.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s

0.5 mm

R	31.324.262.01-2	40°
NR	31.314.262.01-2	

DYNAMIC SCANBODY (LAB/CLIN)**DIGITAL ANALOG****DYNAMIC MILLING TOOL**

SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.103.01-2	10	50.310.207.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.614.262.01-2	33.345.856.01-2	3	25°
52.412.103.01-2	12				33.445.856.01-2	4	
					33.445.856.01-2	6	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.066.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

MULTI-UNIT

GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT
1 mm	2 mm	3 mm	4 mm
R	42.302.207.01-2	42.302.207.02-2	42.302.207.03-2
			42.302.207.04-2

SCANBODY OP**LAB SCANBODY**

30.414.008.01-2

SCANBODY	PEEK PINS	TYPE
54.315.207.21-2	49.414.000.01-2 (6 mm)	A
	49.415.000.01-2 (9 mm)	
	49.416.000.01-2 (13 mm)	
	49.414.000.02-2 (6 mm)	B
	49.415.000.02-2 (9 mm)	
	49.416.000.02-2 (13 mm)	
	49.414.000.03-2 (6 mm)	C
	49.415.000.03-2 (9 mm)	
	49.416.000.03-2 (13 mm)	
	49.416.000.04-2 (13 mm)	D
	49.416.000.05-2 (13 mm)	E
SCREWDRIVER		43.601.107.01-2

DYNAMIC 3TIBASE			
GINGIVAL HEIGHT		α_s	α_s
0.3 mm		CH+ 7mm	CH+ 9mm
R	31.323.264.21-2	25°	25°

DYNAMIC SCREWS	
DYNAMIC SCREW/DRIVER	SCREW/DRIVER LENGTH (mm)
43.618.201.01-2	18
43.624.201.01-2	24
43.632.201.01-2	32

MINI SCANBODY
53.413.264.01-2

STANDARD DYNAMIC TIBASE

	GINGIVAL HEIGHT 1,5 mm	α_s	GINGIVAL HEIGHT 2 mm	α_s
R	31.322.265.03-2	35°	31.322.265.04-2	25°
NR	31.312.265.03-2		31.312.265.04-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)
41.318.079.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY

30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT α_s			GINGIVAL HEIGHT α_s		
0.5 mm			2 mm		
R	31.320.266.01-2	35°	31.320.266.04-2	25°	
NR	31.310.266.01-2		31.310.266.04-2		

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREW/DRIVER	SCREWDRIVER LENGTH (mm)
41.320.068.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.410.006.01-2

STANDARD DYNAMIC TIBASEGINGIVAL HEIGHT α_s

0,5 mm

R	31.322.267.01-2	40°
NR	31.312.267.01-2	

DYNAMIC SCREWS

DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.068.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY


30.412.001.01-2

STANDARD DYNAMIC TIBASE

GINGIVAL HEIGHT		α_s
0.5 mm		
R	31.323.268.01-2	45°
NR	31.313.268.01-2	

DYNAMIC SCREWS		
DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.068.01-2	43.618.201.01-2	18
	43.624.201.01-2	24
	43.632.201.01-2	32

LAB SCANBODY
30.413.002.01-2





This printed version is probably
outdated and may not include all
products or compatibilities.

**Access and download the latest
version of this catalogue**


www.dynamicabutment.com

DAS LIBRARIES

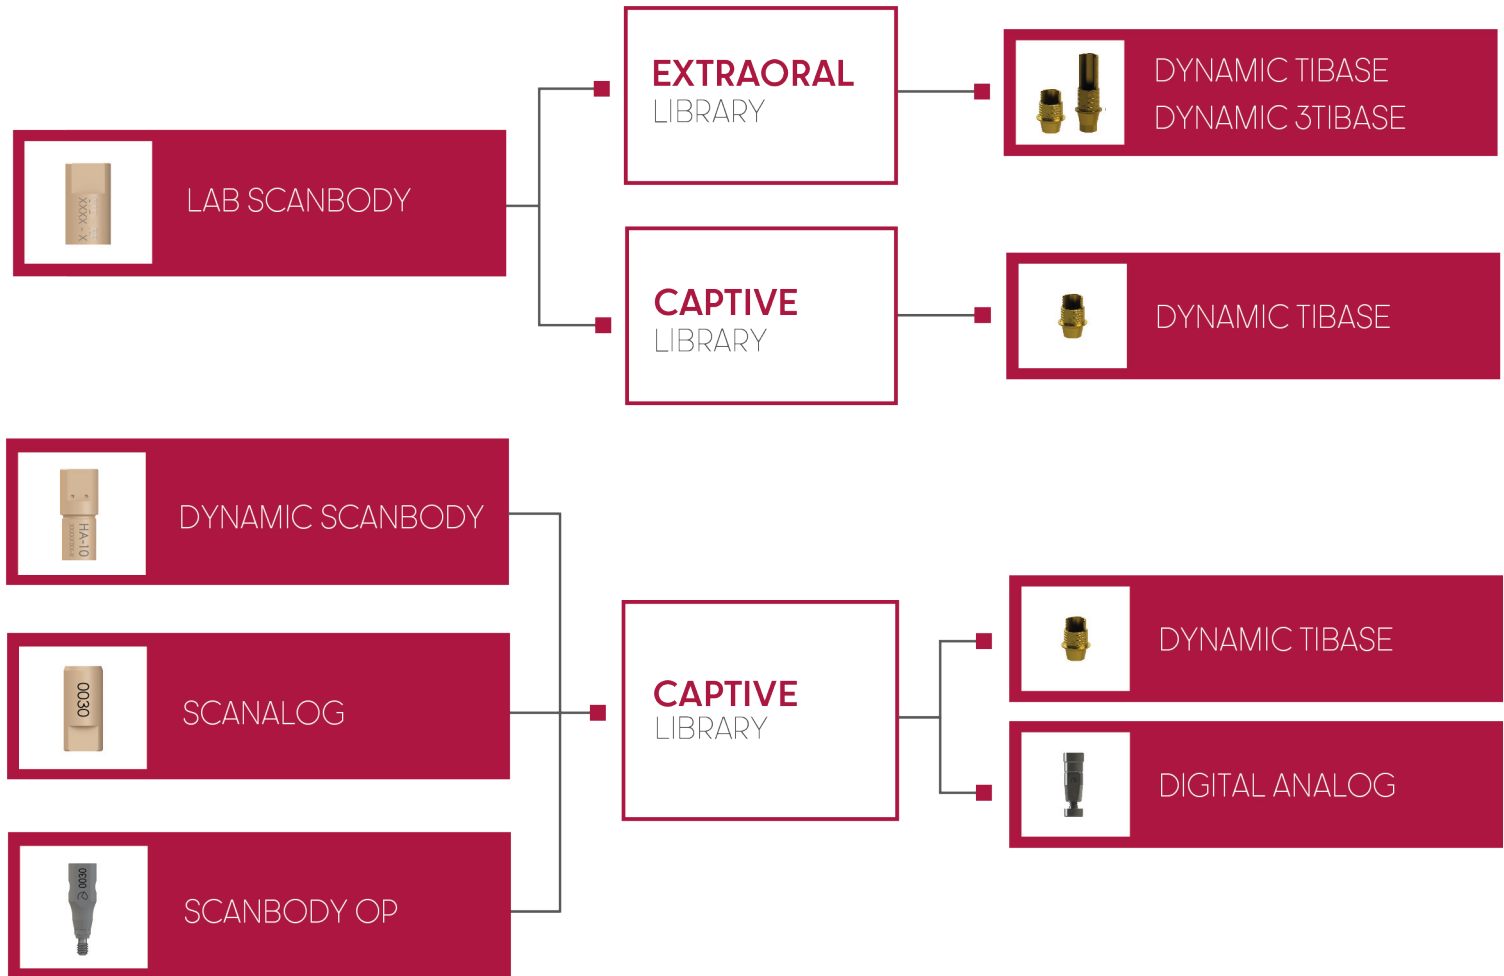


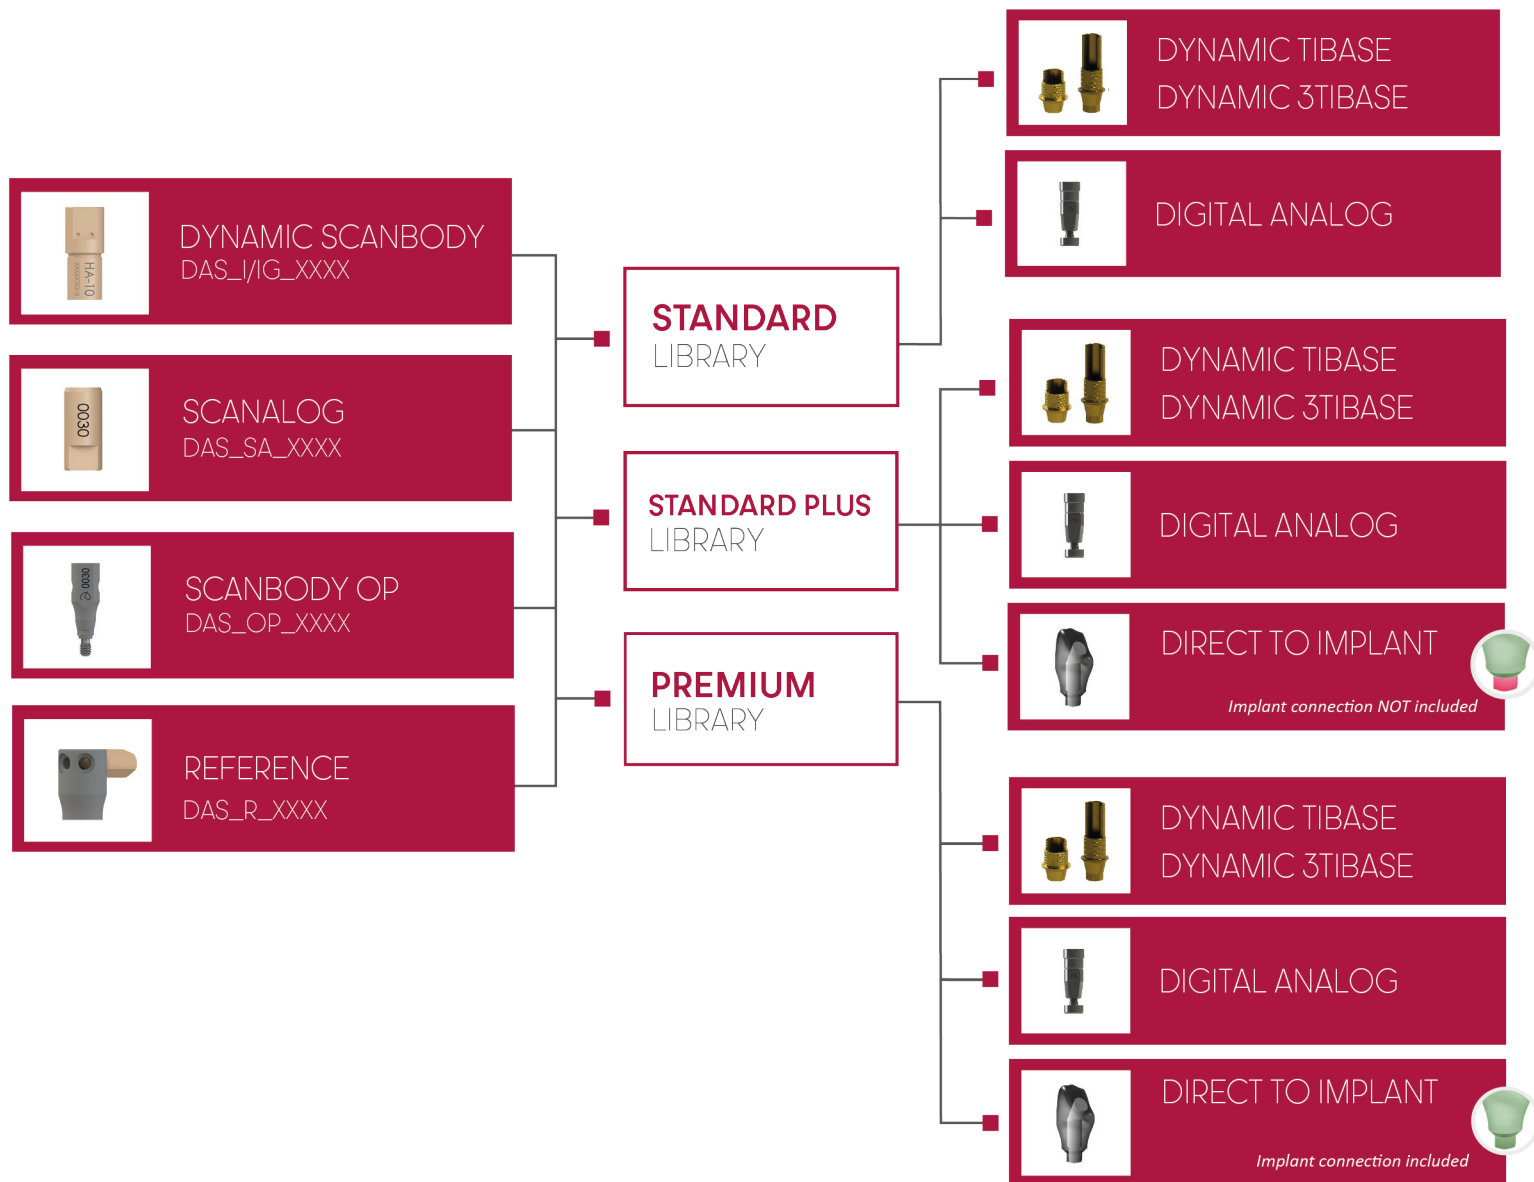


MULTI-UNIT DAS LIBRARIES

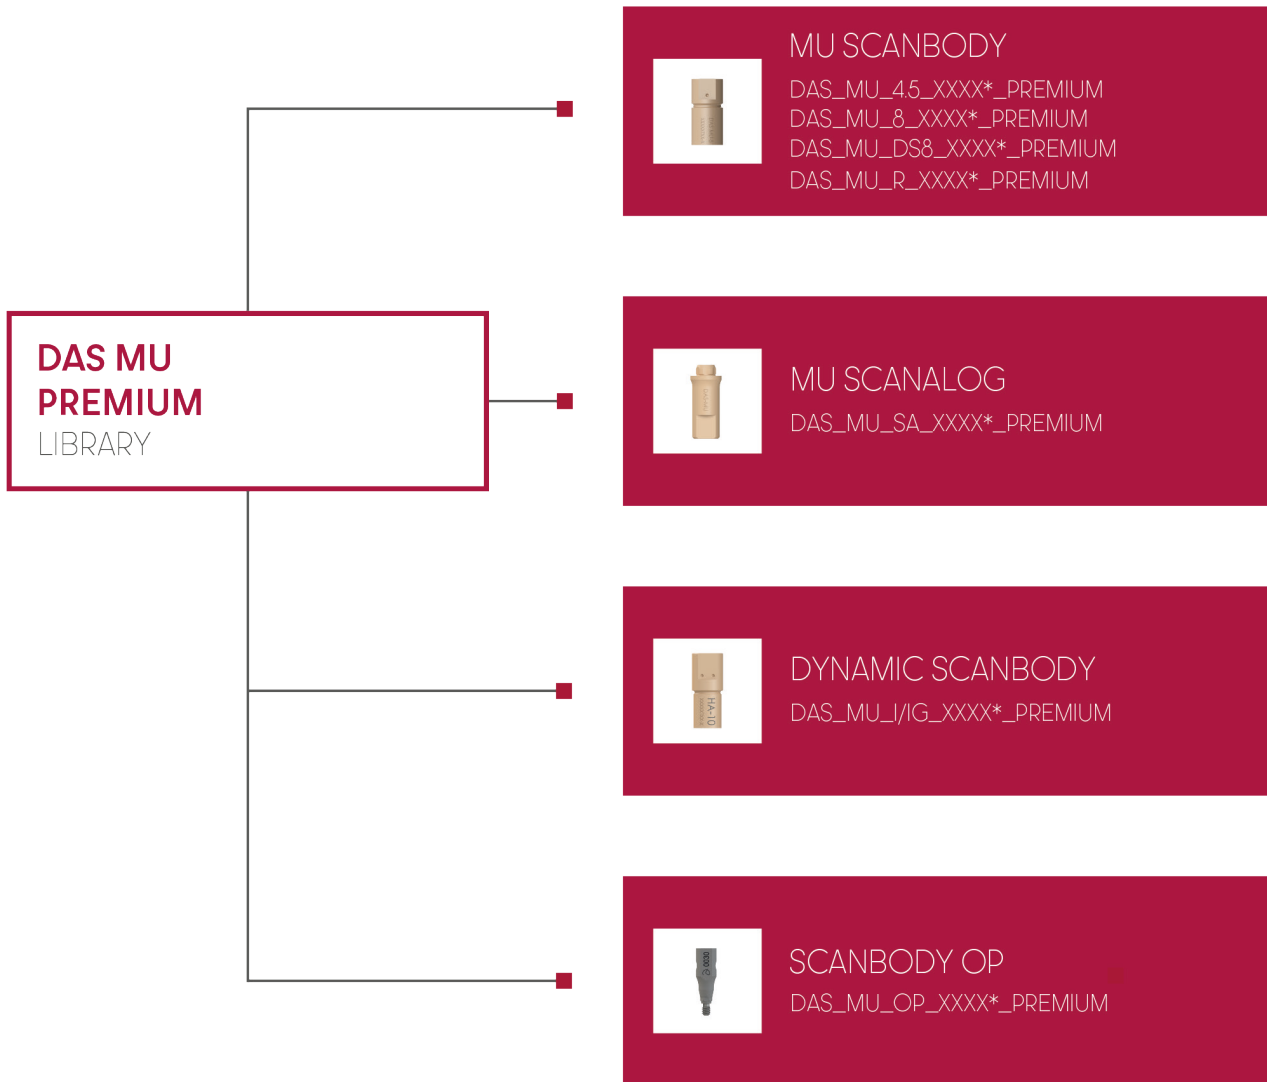

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

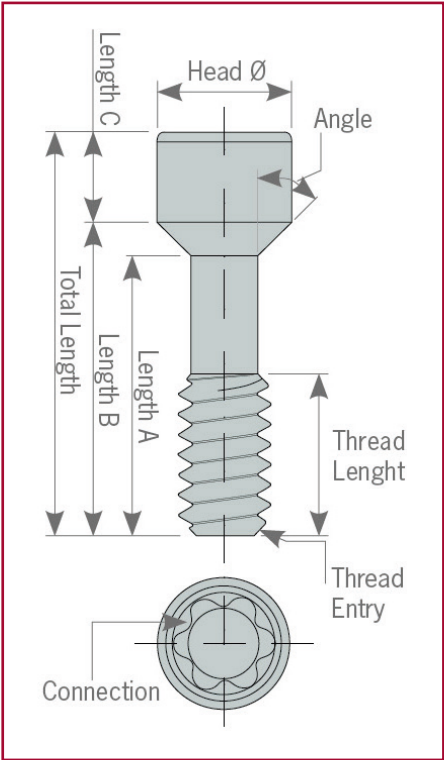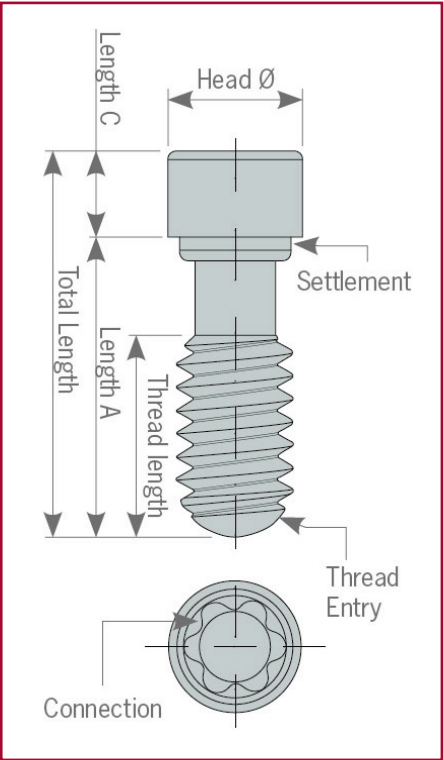

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
-----------	--------	--------	--------------	---------------	----------	----------	----------	---------------	------	-------	--------------	------------

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.314.039.01-2	1.4	15 N·cm	3.9	1.8	2.1	-	1.8	2.4	straight	-	45° Chamfer	Hexalobular 1,70
41.314.040.02-2	1.4	15 N·cm	4	1.7	2.25	2.7	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.314.043.01-2	1.4	15 N·cm	4.3	1.8	2.03	2.9	1.4	2.3	conical	35°	45° Chamfer	Hexalobular 1,70
41.314.044.01-2	1.4	15 N·cm	4.4	2.15	2.73	3	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.314.044.02-2	1.4	15 N·cm	4.4	2	2.6	-	1.8	2.3	straight	-	45° Chamfer	Hexalobular 1,70
41.314.046.01-2	1.4	15 N·cm	4.6	2.5	2.5	3.17	1.43	2.3	conical	35°	45° Chamfer	Hexalobular 1,70
41.314.064.01-2	1.4	15 N·cm	6.4	2.2	4.21	5.15	1.25	2.3	conical	25°	45° Chamfer	Hexalobular 1,70
41.314.067.02-2	1.4	15 N·cm	6.7	2.5	4.71	5.5	1.2	2.3	conical	35°	45° Chamfer	Hexalobular 1,70
41.314.070.01-2	1.4	15 N·cm	7	2.3	5.39	5.65	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.314.074.01-2	1.4	15 N·cm	7.4	3.55	5	5.99	1.41	2.3	conical	25°	45° Chamfer	Hexalobular 1,70
41.314.076.01-2	1.4	15 N·cm	7.6	2.4	5.88	6.35	1.25	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.314.080.01-2	1.4	15 N·cm	8	2.1	4.96	6.8	1.2	2.3	conical	15°	45° Chamfer	Hexalobular 1,70
41.314.084.01-2	1.4	15 N·cm	8.4	2.5	5.92	6.85	1.55	2.3	conical	35°	45° Chamfer	Hexalobular 1,70
41.314.105.01-2	1.4	15 N·cm	10.5	2.31	5	5.45	5.05	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.316.078.01-2	N0-80	15 N·cm	7.8	2.45	5.77	6	1.8	2.3	conical	65°	45° Chamfer	Hexalobular 1,70
41.316.040.01-2	1.6	20 N·cm	4	2.07	2.3	2.47	1.53	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.316.048.01-2	1.6	20 N·cm	4.8	2.6	2.93	3.5	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.316.048.02-2	1.6	20 N·cm	4.8	2.85	3	3.58	1.22	2.3	conical	31°	45° Chamfer	Hexalobular 1,70
41.316.064.01-2	1.6	20 N·cm	6.4	3.15	4.7	5	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.316.064.02-2	1.6	20 N·cm	6.4	1.6	4.08	5.48	0.92	2.3	conical	15°	45° Chamfer	Hexalobular 1,70
41.316.066.01-2	1.6	20 N·cm	6.6	1.95	4.78	5.2	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.316.071.01-2	1.6	20 N·cm	7.1	2.8	5.2	5.54	1.56	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.316.072.01-2	1.6	20 N·cm	7.2	3.5	5.2	5.82	1.38	2.3	conical	30°	45° Chamfer	Hexalobular 1,70
41.316.073.01-2	1.6	20 N·cm	7.3	2.2	4.71	5.56	1.74	2.3	conical	35°	45° Chamfer	Hexalobular 1,70
41.316.076.01-2	1.6	20 N·cm	7.6	3.5	6.1	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.316.078.01-2	1.6	20 N·cm	7.84	2.2	5.51	7.04	0.8	2.3	conical	15°	45° Chamfer	Hexalobular 1,70
41.316.079.01-2	1.6	20 N·cm	7.9	2.30	5.42	6.60	1.3	2.3	conical	20°	45° Chamfer	Hexalobular 1,70
41.316.080.01-2	1.6	20 N·cm	8	3	6.3	6.51	1.49	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.316.081.01-2	1.6	20 N·cm	8.1	3	6.35	6.73	1.37	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.316.084.01-2	1.6	20 N·cm	8.4	3.5	6.8	-	1.6	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.316.084.02-2	1.6	20 N·cm	8.4	2.7	5.85	6.85	1.55	2.3	conical	30°	45° Chamfer	Hexalobular 1,70
41.316.086.01-2	1.6	20 N·cm	8.6	3	7.2	-	1.4	2.3	straight	-	45° Chamfer	Hexalobular 1,70
41.316.094.01-2	1.6	20 N·cm	9.4	2.9	7.62	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.316.108.01-2	1.6	20 N·cm	10.8	2.2	4.72	5.56	5.24	2.3	conical	35°	45° Chamfer	Hexalobular 1,70

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.316.115.01-2	1.6	20 Ncm	11.5	3.5	5.2	5.82	5.68	2.3	conical	30°	45° Chamfer	Hexalobular 1,70
41.316.118.01-2	1.6	20 Ncm	11.8	3.5	6.1	-	5.7	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.316.124.01-2	1.6	20 Ncm	12.4	2.2	5.55	7.05	5.35	2.3	conical	15°	45° Chamfer	Hexalobular 1,70
41.316.132.01-2	1.6	20 Ncm	13.2	2.9	7.63	8	5.2	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.317.040.01-2	N1-72	25 Ncm	4	2.1	2.5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1,70
41.317.041.01-2	N1-72	25 Ncm	4.1	1.9	2.3	2.47	1.63	2.3	conical	55°	45° Chamfer	Hexalobular 1,70
41.317.065.01-2	N1-72	25 Ncm	6.5	2.4	4.7	5.18	1.33	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.317.073.01-2	N1-72	25 Ncm	7.3	2.5	5.5	5.77	1.53	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.317.106.01-2	N1-72	25 Ncm	10.6	2.8	5.54	5.65	4.95	2.3	conical	70°	Semi-sphere	Hexalobular 1,70
41.318.043.01-2	1.8	25 Ncm	4.3	2	2.52	2.7	1.6	2.3	conical	55°	45° Chamfer	Hexalobular 1,70
41.318.044.01-2	1.8	25 Ncm	4.4	2.75	3	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.318.045.01-2	1.8	25 Ncm	4.5	2.3	2.81	2.9	1.6	2.3	conical	70°	45° Chamfer	Hexalobular 1,70
41.318.051.01-2	1.8	25 Ncm	5.1	2.7	3.55	3.7	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.064.01-2	1.8	25 Ncm	6.4	3.45	4.7	5.1	1.3	2.3	conical	35°	45° Chamfer	Hexalobular 1,70
41.318.065.01-2	1.8	25 Ncm	6.5	2.83	5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.318.067.01-2	1.8	25 Ncm	6.7	2.35	4.93	5.4	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.068.01-2	1.8	25 Ncm	6.8	4	5.25	5.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.071.01-2	1.8	25 Ncm	7.1	2.6	5.54	5.65	1.45	2.3	conical	70°	45° Chamfer	Hexalobular 1,70
41.318.074.01-2	1.8	25 Ncm	7.4	3.8	5.8	6.04	1.36	2.3	conical	50°	45° Chamfer	Hexalobular 1,70
41.318.075.01-2	1.8	25 Ncm	7.5	3.3	6.1	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.318.076.01-2	1.8	25 Ncm	7.6	2.52	5.73	6.2	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.077.01-2	1.8	25 Ncm	7.7	2.5	5.59	6.5	1.2	2.3	conical	30°	45° Chamfer	Hexalobular 1,70
41.318.077.02-2	1.8	25 Ncm	7.7	2.2	6.08	6.35	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.080.01-2	1.8	25 Ncm	8	4	6.5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1,70
41.318.083.01-2	1.8	25 Ncm	8.3	4.25	6.79	6.95	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.048.01-2	2	25 Ncm	4.8	2.7	3.3	3.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.051.01-2	2	25 Ncm	5.1	3.1	3.6	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.060.01-2	2	25 Ncm	6	2.7	4.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.065.01-2	2	25 Ncm	6.5	2.7	5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1,70
41.320.068.01-2	2	25 Ncm	6.8	4.4	5.3	5.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.090.01-2	2	25 Ncm	9	4	7.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.094.01-2	2	25 Ncm	9.4	3	7.84	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.117.01-2	2	25 Ncm	11.7	2.75	5.91	6.18	5.52	2.3	conical	35°	Semi-sphere	Hexalobular 1,70
41.320.125.01-2	2	25 Ncm	12.5	3.3	6.33	6.5	6	2.3	conical	45°	45° Chamfer	Hexalobular 1,70

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.320.129.01-2	2	25 N·cm	12,9	4,7	6,7	-	6,2	2,4	straight	-	Semi-sphere	Hexalobular 1,70
41.320.137.01-2	2	25 N·cm	13,7	4	7,5	-	6,2	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.325.067.01-2	2,5	25 N·cm	6,7	4,6	5,1	-	1,6	2,85	straight	-	Semi-sphere	Hexalobular 1,70
41.318.051.01-2	1,8	25 N·cm	5,1	2,7	3,55	3,7	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.051.02-2	1,8	25 N·cm	5,1	2,7	3,38	3,65	1,45	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.064.01-2	1,8	25 N·cm	6,4	3,45	4,7	5,1	1,3	2,3	conical	35°	45° Chamfer	Hexalobular 1,70
41.318.067.01-2	1,8	25 N·cm	6,7	2,35	4,93	5,4	1,3	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.069.01-2	1,8	25 N·cm	6,9	3,5	5,4	-	1,5	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.318.070.01-2	1,8	25 N·cm	7	3,4	5,303	5,7	1,3	2,3	conical	-	45° Chamfer	Hexalobular 1,70
41.318.071.01-2	1,8	25 N·cm	7,1	2,6	5,54	5,65	1,45	2,3	conical	70°	45° Chamfer	Hexalobular 1,70
41.318.074.01-2	1,8	25 N·cm	7,4	3,8	5,8	6,04	1,36	2,3	conical	50°	45° Chamfer	Hexalobular 1,70
41.318.076.01-2	1,8	25 N·cm	7,6	2,52	5,73	6,2	1,4	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.318.077.01-2	1,8	25 N·cm	7,7	2,5	5,59	6,5	1,2	2,3	conical	30°	45° Chamfer	Hexalobular 1,70
41.318.079.01-2	1,8	25 N·cm	7,9	4	6,34	6,5	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.080.01-2	1,8	25 N·cm	8	4	6,5	-	1,5	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.318.083.01-2	1,8	25 N·cm	8,3	4,25	6,79	6,95	1,35	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.111.01-2	1,8	25 N·cm	11,1	2,2	6,06	6,35	4,75	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.318.122.01-2	1,8	25 N·cm	12,2	3,8	5,8	6	6,2	2,3	conical	50°	45° Chamfer	Hexalobular 1,70
41.320.038.01-2	2	25 N·cm	3,81	2,35	2,35	2,42	1,39	2,35	conical	70°	45° Chamfer	Hexalobular 1,70
41.320.039.01-2	2	25 N·cm	3,9	1,9	2,41	2,5	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.042.01-2	2	25 N·cm	4,2	2,2	3,1	-	1,1	2,315	straight	-	30° Chamfer	Hexalobular 1,70
41.320.043.01-2	2	25 N·cm	4,3	2	2,5	-	1,8	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.320.044.01-2	2	25 N·cm	4,4	2,45	2,95	3,1	1,3	2,3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.047.01-2	2	25 N·cm	4,7	3	3,3	-	1,4	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.048.01-2	2	25 N·cm	4,8	2,7	3,3	3,4	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.050.01-2	2	25 N·cm	5	2,8	3,35	3,6	1,4	2,3	conical	31°	Semi-sphere	Hexalobular 1,70
41.320.050.02-2	2	25 N·cm	5	3	3,5	-	1,5	1,5	straight	-	45° Chamfer	Hexalobular 1,70
41.320.051.01-2	2	25 N·cm	5,1	3,1	3,6	-	1,5	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.052.01-2	2	25 N·cm	5,2	3	3,7	-	1,5	2,6	straight	-	30° Chamfer	Hexalobular 1,70
41.320.060.01-2	2	25 N·cm	6	2,7	4,5	-	1,5	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.065.01-2	2	25 N·cm	6,5	2,7	5	-	1,5	2,3	straight	-	45° Chamfer	Hexalobular 1,70
41.320.067.01-2	2	25 N·cm	6,7	2,3	3,59	5,7	1	2,58	conical	15°	45° Chamfer	Hexalobular 1,70
41.320.068.01-2	2	25 N·cm	6,8	4,4	5,3	5,4	1,4	2,3	conical	60°	45° Chamfer	Hexalobular 1,70
41.320.070.01-2	2	25 N·cm	7	3	5,6	-	1,4	2,3	straight	-	Semi-sphere	Hexalobular 1,70

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.320.071.01-2	2	25N·cm	7.1	4	5.11	5.55	1.55	2.3	conical	20°	45° Chamfer	Hexalobular 1,70
41.320.074.01-2	2	25 N·cm	7.4	3.3	6	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.075.01-2	2	25 N·cm	7.5	2.75	5.9	6.19	1.31	2.3	conical	35°	Semi-sphere	Hexalobular 1,70
41.320.079.01-2	2	25 N·cm	7.9	3.3	6.32	6.5	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.081.01-2	2	25N·cm	8.1	4.6	5.53	5.8	2.3	2.3	conical	65°	45° Chamfer	Hexalobular 1,70
41.320.082.01-2	2	25 N·cm	8.2	4.7	6.7	-	1.5	2.4	straight	-	Semi-sphere	Hexalobular 1,70
41.320.090.01-2	2	25 N·cm	9	4	7.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.094.01-2	2	25 N·cm	9.4	3	7.84	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.094.02-2	2	25N·cm	9.4	3	7.9	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.117.01-2	2	25 N·cm	11.7	2.75	5.91	6.18	5.52	2.3	conical	35°	Semi-sphere	Hexalobular 1,70
41.320.125.01-2	2	25 N·cm	12.5	3.3	6.33	6.5	6	2.3	conical	45°	45° Chamfer	Hexalobular 1,70
41.320.129.01-2	2	25 N·cm	12.9	4.7	6.7	-	6.2	2.4	straight	-	Semi-sphere	Hexalobular 1,70
41.320.137.01-2	2	25 N·cm	13.7	4	7.5	-	6.2	2.3	straight	-	Semi-sphere	Hexalobular 1,70
41.325.054.01-2	2,5	25 N·cm	5.4	4.6	4.1	-	1.3	2.865	straight	-	Semi-sphere	Hexalobular 1,70
41.325.067.01-2	2,5	25 N·cm	6.7	4.6	5.1	-	1.6	2.85	straight	-	Semi-sphere	Hexalobular 1,70

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.312.003.01-2	1.2	0.25	15 N·cm	7.85	2.7	6.2	6.55	1.3	1.9	conical	45° Chamfer	Hex 1.20
40.314.003.01-2	1.4	0.3	15 N·cm	3.9	1.91	2.1	-	1.8	2.4	straight	45° Chamfer	Hex 1.20
40.314.003.02-2	1.4	0.3	15 N·cm	4	2	2.2	-	1.8	2.3	straight	45° Chamfer	Hex 1.20
40.314.003.03-2	1.4	0.3	15 N·cm	7.6	2.4	6.05	6.3	1.3	1.9	conical	45° Chamfer	Hex 1.20
40.314.003.04-2	1.4	0.3	15 N·cm	7.5	2.5	5.45	5.7	1.8	1.85	conical	45° Chamfer	Hex 1.20
40.314.003.05-2	1.4	0.3	15 N·cm	5.3	1.34	3.7	-	1.6	2.1	straight	30° Chamfer	Hex 1.25
40.314.004.01-2	1.4	0.3	15 N·cm	6.3	2.2	4.6	5.1	1.2	2.1	conical	30° Chamfer	Hex 1.25
40.314.004.02-2	1.4	0.3	15 N·cm	8.4	2.5	5.99	6.7	1.7	2	conical	45° Chamfer	Hex 1.25
40.314.004.03-2	1.4	0.3	15 N·cm	4.3	1.8	2.3	-	2	2	straight	45° Chamfer	Hex 1.25
40.314.004.04-2	1.4	0.25	20 N·cm	4.6	2.45	2.36	2.95	1.65	2.1	conical	45° Chamfer	Hex 1.25
40.314.005.01-2	1.4	0.3	15 N·cm	7.6	3.6	5.21	6	1.6	2.15	conical	45° Chamfer	Hex 1.27
40.314.005.02-2	1.4	0.3	15 N·cm	7.5	2.4	5.5	5.7	1.8	2.1	conical	45° Chamfer	Hex 1.27
40.314.005.03-2	1.4	0.3	15 N·cm	4.8	2.6	2.9	-	1.9	2.25	straight	45° Chamfer	Hex 1.27
40.314.005.04-2	1.4	0.3	15 N·cm	4	1.7	2.25	-	1.75	2.1	straight	45° Chamfer	Hex 1.27
40.314.007.01-2	1.4	0.3	15 N·cm	4	1.8	2.01	2.8	1.2	2.2	conical	45° Chamfer	Torx T6
40.314.007.02-2	1.4	0.3	15 N·cm	7	2.1	6.2	2.25	0.8	2.1	conical	45° Chamfer	Torx T6
40.314.007.03-2	1.4	0.3	15 N·cm	5.1	1.1	3.35	3.9	1.2	2.1	conical	45° Chamfer	Torx T6
40.314.008.01-2	1.4	0.3	15 N·cm	3.6	1.8	2.1	-	1.5	2.1	straight	45° Chamfer	Unigrip
40.314.008.02-2	1.4	0.3	15 N·cm	6.7	2.5	4.87	5.3	1.4	1.8	conical	45° Chamfer	Unigrip
40.314.008.03-2	1.4	0.3	15 N·cm	6.65	1.6	3.65	5.75	0.9	2.95	conical	45° Chamfer	Unigrip
40.314.008.04-2	1.4	0.3	15 N·cm	4.8	1.1	3.05	3.6	1.2	2.1	conical	45° Chamfer	Unigrip
40.314.012.01-2	1.4	0.3	15 N·cm	4.5	1.7	2.01	2.4	2.1	2.15	conical	45° Chamfer	Star 1.50
40.314.014.01-2	1.4	0.3	15 N·cm	4.45	2.3	2.48	-	1.97	2.16	straight	45° Chamfer	Hex 1.19
40.315.008.01-2	No-80	0.317	15 N·cm	8.3	2.45	5.79	5.95	2.35	2	conical	45° Chamfer	Unigrip
40.316.002.01-2	1.6	0.35	20 N·cm	7	2.79	4.86	5.44	1.56	2.3	conical	45° Chamfer	Cuad. 1.30
40.316.002.02-2	1.6	0.35	20 N·cm	9.3	3.3	7.3	-	2	2.3	straight	Semi-sphere	Cuad. 1.30
40.316.003.01-2	1.6	0.35	20 N·cm	8.4	2.5	6.6	-	1.8	2	straight	45° Chamfer	Hex 1.20
40.316.003.02-2	1.6	0.35	20 N·cm	10.2	2	7.88	8.2	2	2.2	conical	45° Chamfer	Hex 1.20
40.316.004.01-2	1.6	0.35	20 N·cm	8.6	2.7	6.16	6.9	1.7	2	conical	45° Chamfer	Hex 1.25
40.316.004.02-2	1.6	0.35	20 N·cm	8.8	3	6.73	7	1.8	2.1	conical	45° Chamfer	Hex 1.25
40.316.004.03-2	1.6	0.35	20 N·cm	6.9	2.2	5.02	5.2	1.7	1.92	conical	45° Chamfer	Hex 1.25
40.316.005.01-2	1.6	0.35	20 N·cm	7.5	3.6	5.44	5.9	1.6	2.13	conical	45° Chamfer	Hex 1.27
40.316.005.02-2	1.6	0.35	20 N·cm	8.25	3	6.25	-	2	2.33	straight	45° Chamfer	Hex 1.27
40.316.005.03-2	1.6	0.35	20 N·cm	8.25	3.03	6.25	-	2	2.45	straight	45° Chamfer	Hex 1.27

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.316.005.04-2	1.6	0.35	20 N·cm	10.5	3.2	8.15	8.4	2.1	2.1	conical	45° Chamfer	Hex 1.27
40.316.005.05-2	1.6	0.35	20 N·cm	7.6	2.7	5.21	5.5	2.1	2.1	conical	45° Chamfer	Hex 1.27
40.316.005.06-2	1.6	0.35	20 N·cm	3.8	1.8	2.2	-	1.6	2.1	straight	45° Chamfer	Hex 1.27
40.316.005.07-2	1.6	0.35	20 N·cm	8.8	2.85	6.73	6.9	1.9	2.15	conical	45° Chamfer	Hex 1.27
40.316.005.08-2	1.6	0.35	20 N·cm	9	3.9	6.49	6.9	2.1	2.18	conical	45° Chamfer	Hex 1.27
40.316.005.09-2	1.6	0.35	20 N·cm	8.5	1.6	6.46	7	1.5	2.2	conical	45° Chamfer	Hex 1.27
40.316.007.01-2	1.6	0.35	20 N·cm	7.9	2	5.63	6.9	1	2.18	conical	45° Chamfer	Torx T6
40.316.007.02-2	1.6	0.35	20 N·cm	9	1.6	6.96	7.5	1.5	2.2	conical	45° Chamfer	Torx T6
40.316.008.01-2	1.6	0.35	20 N·cm	7	2.7	5.15	-	1.85	2.3	straight	45° Chamfer	Unigrip
40.316.008.02-2	1.6	0.35	20 N·cm	7.3	2.7	5.15	5.9	1.4	2.2	conical	45° Chamfer	Unigrip
40.316.008.03-2	1.6	0.35	20 N·cm	8.5	1.6	6.46	7	1.5	2.2	conical	45° Chamfer	Unigrip
40.316.012.01-2	1.6	0.35	20 N·cm	8	2.65	5.53	6	2	2.15	conical	45° Chamfer	Star 1.50
40.316.013.01-2	1.6	0.35	20 N·cm	6.4	1.2	4.51	4.9	1.5	2.2	conical	45° Chamfer	Hex 1.00
40.316.014.01-2	1.6	0.35	20 N·cm	7.9	2.3	5.42	6.46	1.44	2.2	conical	45° Chamfer	Hex 1.19
40.317.002.01-2	N1-72	0.353	25 N·cm	8.17	3	5.31	5.87	2.3	2.4	conical	45° Chamfer	Cuad. 1.30
40.317.004.01-2	N1-72	0.353	25 N·cm	7.6	2.8	5.6	5.77	1.83	2.3	conical	45° Chamfer	Hex 1.27
40.317.004.02-2	N1-72	0.353	25 N·cm	7.52	2.2	5.12	5.773	1.75	2.1	conical	45° Chamfer	Hex 1.25
40.317.005.01-2	N1-72	0.353	25 N·cm	7.6	2.15	5.17	5.4	2.2	2.2	conical	45° Chamfer	Hex 1.27
40.317.005.02-2	N1-72	0.353	25 N·cm	7.3	2.4	4.73	5.25	2.05	2.4	conical	45° Chamfer	Hex 1.27
40.317.005.03-2	N1-72	0.353	25 N·cm	8.5	1.6	6.58	7	1.5	2.2	conical	45° Chamfer	Hex 1.27
40.318.002.01-2	1.8	0.35	25 N·cm	7	3.2	5.2	-	1.8	2.5	straight	45° Chamfer	Cuad. 1.30
40.318.002.02-2	1.8	0.35	25 N·cm	8.3	2.6	6.6	-	1.7	2.45	straight	45° Chamfer	Cuad. 1.30
40.318.003.01-2	1.8	0.35	25 N·cm	6.8	3.3	5.2	-	1.6	2.3	straight	45° Chamfer	Hex 1.20
40.318.003.02-2	1.8	0.35	25 N·cm	8	3.6	6	-	2	2.1	straight	45° Chamfer	Hex 1.20
40.318.003.03-2	1.8	0.35	25 N·cm	8.5	1.6	6.56	7	1.5	2.2	conical	45° Chamfer	Hex 1.20
40.318.004.01-2	1.8	0.35	25 N·cm	7.2	4.8	5.36	5.9	1.3	2.4	conical	45° Chamfer	Hex 1.25
40.318.004.02-2	1.8	0.35	25 N·cm	9.8	5.8	7.96	8.5	1.3	2.4	conical	45° Chamfer	Hex 1.25
40.318.004.03-2	1.8	0.35	25 N·cm	7.65	3.3	5.17	5.75	1.9	2.4	conical	45° Chamfer	Hex 1.25
40.318.005.01-2	1.8	0.35	25 N·cm	4.5	2.3	2.8	2.9	1.6	2.33	conical	45° Chamfer	Hex 1.27
40.318.005.02-2	1.8	0.35	25 N·cm	7.6	3.6	5.76	6	1.6	2.33	conical	45° Chamfer	Hex 1.27
40.318.005.03-2	1.8	0.35	25 N·cm	8.5	1.6	6.56	7	1.5	2.2	conical	45° Chamfer	Hex 1.27
40.318.005.04-2	1.8	0.35	25 N·cm	5.2	1.6	3.41	3.8	1.4	2.2	conical	45° Chamfer	Hex 1.27
40.318.006.01-2	1.8	0.35	25 N·cm	6	3	3.67	4	2	2.4	conical	45° Chamfer	Hex 1.70
40.318.007.01-2	1.8	0.35	25 N·cm	9.1	4.25	7.32	7.45	1.65	2.18	conical	45° Chamfer	Torx T6

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.318.008.01-2	1,8	0,35	25 N·cm	8,3	2,5	6,5	-	1,8	2,45	straight	45° Chamfer	Unigrip
40.318.008.03-2	1,8	0,35	25 N·cm	8,5	2	6,27	6,5	2	2,18	conical	45° Chamfer	Unigrip
40.318.012.01-2	1,8	0,35	25 N·cm	7,25	2,4	4,93	5,25	2	2,15	conical	45° Chamfer	Star 1,50
40.318.012.02-2	1,8	0,35	25 N·cm	8	2,6	5,68	6	2	2,15	conical	45° Chamfer	Star 1,50
40.318.013.01-2	1,8	0,35	25 N·cm	7,7	2,5	5,7	6,4	1,3	2,2	conical	45° Chamfer	Hex. 1,00
40.318.013.02-2	1,8	0,35	25 N·cm	9,2	1,6	7,26	7,7	1,5	2,2	conical	45° Chamfer	Hex. 1,00
40.320.002.01-2	2	0,4	30 N·cm	4,9	3,26	3,26	3,5	1,4	2,49	conical	45° Chamfer	Cuad. 1,30
40.320.002.02-2	2	0,4	30 N·cm	7,45	3	5,7	5,9	1,5	2,4	conical	45° Chamfer	Cuad. 1,30
40.320.002.03-2	2	0,4	30 N·cm	10,2	3,15	8,4	-	1,8	2,45	straight	45° Chamfer	Cuad. 1,30
40.320.002.04-2	2	0,4	30 N·cm	7	3,25	5	-	2	2,4	straight	45° Chamfer	Cuad. 1,30
40.320.002.05-2	2	0,4	30 N·cm	4,7	3	3,33	-	1,37	2,35	straight	45° Chamfer	Cuad. 1,30
40.320.003.01-2	2	0,4	30 N·cm	4,7	3	3,33	-	1,37	2,35	straight	45° Chamfer	Hex. 1,20
40.320.003.02-2	2	0,4	30 N·cm	7	3,25	5	-	2	2,4	straight	45° Chamfer	Hex. 1,20
40.320.003.03-2	2	0,4	30 N·cm	7,9	3,7	5,55	6,05	1,85	2,4	conical	45° Chamfer	Hex. 1,20
40.320.003.04-2	2	0,4	30 N·cm	8,4	2,75	5,68	6,35	2,05	2,3	conical	45° Chamfer	Hex. 1,20
40.320.003.05-2	2	0,4	30 N·cm	4,8	3,3	3,65	3,9	0,9	2,45	conical	45° Chamfer	Hex. 1,20
40.320.003.06-2	2	0,25	25 N·cm	4	2	2,5	-	1,5	2,3	straight	30° Chamfer	Hex. 1,20
40.320.003.07-2	2	0,25	25 N·cm	8,5	1,6	6,63	7	1,5	2,2	conical	45° Chamfer	Hex. 1,20
40.320.005.01-2	2	0,4	30 N·cm	7,6	3,7	6	-	1,6	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.02-2	2	0,4	30 N·cm	10,3	4	8,3	-	2	2,45	straight	45° Chamfer	Hex. 1,27
40.320.005.03-2	2	0,4	30 N·cm	10,3	3,5	8,3	-	2	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.04-2	2	0,4	30 N·cm	10,5	3,2	8,15	8,4	2,1	2,5	conical	45° Chamfer	Hex. 1,27
40.320.007.01-2	2	0,4	30 N·cm	6,7	2,25	3,59	5,7	1	2,58	conical	45° Chamfer	Torx T6
40.320.007.02-2	2	0,4	30 N·cm	7,4	3,3	6	-	1,4	2,3	straight	Semi-sphere	Torx T6
40.320.007.03-2	2	0,4	30 N·cm	7,4	2,8	5,9	6,1	1,3	2,4	conical	Semi-sphere	Torx T6
40.320.007.04-2	2	0,4	30 N·cm	4,6	2,96	3,21	3,5	1,1	2,45	conical	45° Chamfer	Torx T6
40.320.007.05-2	2	0,25	25 N·cm	5	3	3,5	-	1,5	2,6	straight	30° Chamfer	Torx T6
40.320.008.01-2	2	0,4	30 N·cm	7	3,25	5	-	2	2,4	straight	45° Chamfer	Unigrip
40.320.008.02-2	2	0,4	30 N·cm	7,3	3	5,8	6,2	1,1	2,5	conical	45° Chamfer	Unigrip
40.320.008.03-2	2	0,4	30 N·cm	10	3,1	8,5	-	1,5	2,45	straight	45° Chamfer	Unigrip
40.320.008.04-2	2	0,4	30 N·cm	8,5	1,6	6,63	7	1,5	2,2	conical	45° Chamfer	Unigrip
40.325.002.01-2	2,5	0,45	30 N·cm	7,41	3,5	4,75	5,29	2,12	2,87	conical	Semi-sphere	Cuad. 1,30
40.325.008.01-2	2,5	0,45	30 N·cm	7	2,8	5,6	-	1,4	3,4	straight	45° Chamfer	Unigrip
40.320.003.01-2	2	0,4	30 N·cm	4,7	3	3,33	-	1,37	2,35	straight	45° Chamfer	Hex. 1,20

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.320.003.02-2	2	0,4	30 N·cm	7	3,25	5	-	2	2,4	straight	45° Chamfer	Hex. 1,20
40.320.003.03-2	2	0,4	30 N·cm	7,9	3,7	5,55	6,05	1,85	2,4	conical	45° Chamfer	Hex. 1,20
40.320.003.04-2	2	0,4	30 N·cm	8,4	2,75	5,68	6,35	2,05	2,3	conical	45° Chamfer	Hex. 1,20
40.320.003.05-2	2	0,4	30 N·cm	4,8	3,3	3,65	3,9	0,9	2,45	conical	45° Chamfer	Hex. 1,20
40.320.003.06-2	2	0,25	25 N·cm	4	2	2,5	-	1,5	2,3	straight	30° Chamfer	Hex. 1,20
40.320.003.07-2	2	0,25	25 N·cm	8,5	1,6	6,63	7	1,5	2,2	conical	45° Chamfer	Hex. 1,20
40.320.003.08-2	2	0,4	25 N·cm	4,2	2,2	2,7	-	1,5	2,3	straight	30° Chamfer	Hex. 1,20
40.320.005.01-2	2	0,4	30 N·cm	7,6	3,7	6	-	1,6	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.02-2	2	0,4	30 N·cm	10,3	4	8,3	-	2	2,45	straight	45° Chamfer	Hex. 1,27
40.320.005.03-2	2	0,4	30 N·cm	10,3	3,5	8,3	-	2	2,33	straight	45° Chamfer	Hex. 1,27
40.320.005.04-2	2	0,4	30 N·cm	10,5	3,2	8,15	8,4	2,1	2,5	conical	45° Chamfer	Hex. 1,27
40.320.005.05-2	2	0,4	25 N·cm	9	2,15	6,93	7,3	1,7	2,2	conical	45° Chamfer	Hex. 1,27

SCREWDRIVERS




STRAIGHT SCREWS

Straight screws cover all the thread metrics available on the market. We have several lengths for each metric to make the adaptation to the milled structures easier.



DYNAMIC MILLING TOOL SPECIFICATIONS

MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER	SEAT	CUTTING LENGTH	USEFUL LENGTH (max. drilling depth)	STEM CUTTING DIAMETER	SUPPORT DIAMETER (SHANK)	TOTAL LENGTH
		ϕ_c		Lc	Lu	ϕ_v	ϕ_s	Lt
BEGO RS/RSX 3° ASTRA EVOLUTION 3.0° *Only for titanium and soft materials	33.325.472.01-2	1.4	25	0.4	4.7	0.5	3	50
	33.425.472.01-2	1.4	25	0.4	4.7	0.5	4	50
	33.625.472.01-2	1.4	25	0.4	4.7	0.5	6	50
STRAUMANN BONE LEVEL NP STRAUMANN BONE LEVEL RP MEDENTIS ICX TEMPLANT 4.1 STRAUMANN SYNOCTA 3.5 MEDENTIS ICX NARROW	33.315.804.01-2	1.6	15	0.7	8	0.65	3	50
	33.415.804.01-2	1.6	15	0.7	8	0.65	4	50
	33.615.804.01-2	1.6	15	0.7	8	0.65	6	50
ANTHOGYR AXIOM RG/PX XNP ANTHOGYR AXIOM RG/PX RP ANTHOGYR AXIOM RG/PX WP	33.320.704.01-2	1.6	20	0.7	7	0.8	3	50
	33.420.704.01-2	1.6	20	0.7	7	0.8	4	50
	33.620.704.01-2	1.6	20	0.7	7	0.8	6	50
ASTRA EVOLUTION 3.6 ANKYLOS ALPHABIO CONICAL STANDARD CONNECTION LASAK BIONIQ QR NEODENT GM ANKYLOS BALANCE BASE	33.330.734.01-2	1.6	30	0.7	7.3	0.8	3	50
	33.430.734.01-2	1.6	30	0.7	7.3	0.8	4	50
	33.630.734.01-2	1.6	30	0.7	7.3	0.8	6	50
NOBEL BIOACARE ACTIVE NP NOBEL BIOACARE ACTIVE 3.0 LASAK BIONIQ QN	33.335.754.01-2	1.6	35	0.7	7.5	0.65	0.5	50
	33.435.754.01-2	1.6	35	0.7	7.5	0.65	4	50
	33.635.754.01-2	1.6	35	0.7	7.5	0.65	6	50
OSSTEM TS NP CAMLOG SCREW LINE 3.8 NP CAMLOG SCREW LINE 4.3 RP KLOCKNER VEGA NV XIVE S 3.4 BIOTECH DENTAL KONTACT XNP BIOTECH DENTAL KONTACT RP DIO UF NP CAMLOG SCREW-LINE 3.3	33.345.804.01-2	1.6	45	0.7	8	0.65	3	50
	33.445.804.01-2	1.6	45	0.7	8	0.65	4	50
	33.645.804.01-2	1.6	45	0.7	8	0.65	6	50
MIS C1 NP MIS M4 NP CONOLOG 3.8 CONOLOG 4.3 ASTRA YELLOW ALPHABIO CONICAL HEX CONNECTION	33.360.754.01-2	1.6	60	0.7	7.5	0.65	3	50
	33.460.754.01-2	1.6	60	0.7	7.5	0.65	4	50
	33.660.754.01-2	1.6	60	0.7	7.5	0.65	6	50
BIOMET 3i CERTAIN NP ASTRA AQUA	33.390.754.01-2	1.6	90	0.7	7.5	0.65	3	50
	33.490.754.01-2	1.6	90	0.7	7.5	0.65	4	50
	33.690.754.01-2	1.6	90	0.7	7.5	0.65	6	50
ASTRA EVOLUTION 4.2	33.350.775.01-2	1.7	50	0.7	7.7	0.8	3	50
	33.450.775.01-2	1.7	50	0.7	7.7	0.8	4	50
	33.650.775.01-2	1.7	50	0.7	7.7	0.8	6	50

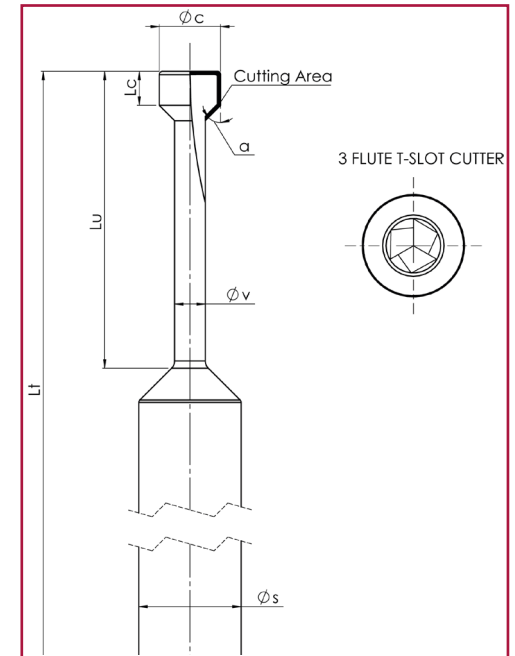

DYNAMIC MILLING TOOL SPECIFICATIONS

MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER	SEAT	CUTTING LENGTH	USEFUL LENGTH (max. drilling depth)	STEM CUTTING DIAMETER	SUPPORT DIAMETER (SHANK)	TOTAL LENGTH
		Øc		Lc	Lu	Øv	Øs	Lt
BIOMET 3i CERTAIN RP NOBEL BIO CARE BRANEMARK NP NOBEL BIO CARE REPLACE NP MEGAGEN ANYRIDGE RP BIOMET 3i CERTAIN WP	33.390.805.01-2	1,7	90	0,7	8	0,65	3	50
	33.490.805.01-2	1,7	90	0,7	8	0,65	4	50
	33.690.805.01-2	1,7	90	0,7	8	0,65	6	50
BEGO S/RI 3.25-3.75 BEGO S/RI 4.1 BEGO S/RI 4.5 BEGO S/RI 5.50 STRAUMANN SCREW-RETAINED NC/RC BEGO MULTI-PLUS	33.335.676.01-2	1,8	35	1	6,7	0,9	3	50
	33.435.676.01-2	1,8	35	1	6,7	0,9	4	50
	33.635.676.01-2	1,8	35	1	6,7	0,9	6	50
KLOCKNER ESSENTIAL CONE 4.5 DIRECTO IMPLANTE KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 12° KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 25° KLOCKNER VEGA RV XIVE S 3.8 XIVE S 4.5 BIOHORIZONS 3.0 STRAUMANN SYNOCTA 6.5 STRAUMANN BLX RB STRAUMANN BLX WB STRAUMANN TLX NT STRAUMANN TLX RT STRAUMANN TLX WT DENTIM MU SUPERLINE	33.345.856.01-2	1,8	45	1	8,5	0,9	3	50
	33.445.856.01-2	1,8	45	1	8,5	0,9	4	50
	33.645.856.01-2	1,8	45	1	8,5	0,9	6	50
MIS C1 RP PALTOP UNIVERSAL MULTI UNIT MIS C1 WP S&M PREMIUM KHONO 3.3 S&M PREMIUM KHONO 3.8 S&M OUTLINK 3.3 S&M OUTLINK 4.1 S&M PREMIUM KHONO 4.25 BREDENT SKY NP BREDENT SKY RP ADIN TOUAREG/CLOSEFIT NP ADIN TOUAREG/CLOSEFIT UNP CAMLOG CONELOG 3.3 GLOBAL D (TEKKA) EASY IMPLANT MINI ROOT R	33.360.756.01-2	1,8	60	1	7,5	0,9	3	50
	33.460.756.01-2	1,8	60	1	7,5	0,9	4	50
	33.660.756.01-2	1,8	60	1	7,5	0,9	6	50
*ZIMMER SCREW-VENT 3.5 ZIMMER SCREW-VENT 4.5 ASTRA EVOLUTION UNIT ABUTMENT ZIMMER TYPE 5.7 OXY FIXO	33.370.716.01-2	1,8	70	1	7,1	0,9	3	50
	33.470.716.01-2	1,8	70	1	7,1	0,9	4	50
	33.670.716.01-2	1,8	70	1	7,1	0,9	6	50

DYNAMIC MILLING TOOL SPECIFICATIONS

MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER	SEAT	CUTTING LENGTH	USEFUL LENGTH (max. drilling depth)	STEM CUTTING DIAMETER	SUPPORT DIAMETER (SHANK)	TOTAL LENGTH
		Øc		Lc	Lu	Øv	Øs	Lt
NOBEL BIO CARE BRANEMARK RP NOBEL BIO CARE MULTI-UNIT RP BIOMET 3i OSSEOTITE NP BTI EXTERNAL CONNECTION NP BTI INTERNAL CONNECTION RP MIS MULTI-UNIT ST KEYSTONE PRIMA NP KEYSTONE PRIMA RP KEYSTONE PRIMA WP NEOSS PROACTIVE 3.4 NEOSS PROACTIVE 4.1 BIOMET 3i OSSEOTITE WP BTI EXTERNAL CONNECTION WP BTI MULTI-IM UNIVERSAL RP ANTHOGRYD MULTI-UNIT 4.8 BEGO MINI BTI INTERNAL WP LASAK MULTI-UNIT QN/OR SIC SICACE 3.3 SIC SICACE 4.2 IMPLANT DIRECT	33.390.716.01-2	1.8	90	1	7.1	0.9	3	50
	33.490.716.01-2	1.8	90	1	7.1	0.9	4	50
	33.690.716.01-2	1.8	90	1	7.1	0.9	6	50
*STRAUMANN INTERNAL OCTAGON RP STRAUMANN INTERNAL OCTAGON 6.5"	33.315.708.01-2	1.8	15	1	7	1	3	50
	33.415.708.01-2	2	15	1	7	1	4	50
	33.615.708.01-2	2	15	1	7	1	6	50
STRAUMANN SYNOC TA RP	33.330.708.01-2	2	30	1	7	1	3	50
	33.430.708.01-2	2	30	1	7	1	4	50
	33.630.708.01-2	2	30	1	7	1	6	50
NOBEL BIO CARE ACTIVE RP NOBEL BIO CARE ACTIVE WP	33.335.758.01-2	2	35	1	7.5	1	3	50
	33.435.758.01-2	2	35	1	7.5	1	4	50
	33.635.758.01-2	2	35	1	7.5	1	6	50
*OSSTEM TS RP CAMLOG SCREW-LINE 5.0 CAMLOG SCREW-LINE 6.0"	33.345.808.01-2	2	45	1	8	1	3	50
	33.445.808.01-2	2	45	1	8	1	4	50
	33.645.808.01-2	2	45	1	8	1	6	50
*NOBEL BIO CARE REPLACE RP ASTRA LILAC NOBEL BIO CARE REPLACE WP ASTRA EVOLUTION 4.8 NOBEL BIO CARE BRANEMARK WP ASTRA EVOLUTION 5.4 NOBEL BIO CARE REPLACE 6.0"	33.390.958.01-2	2	90	1	9.5	1	3	50
	33.490.958.01-2	2	90	1	9.5	1	4	50
	33.690.958.01-2	2	90	1	9.5	1	6	50

SCREWDRIVER ADAPTOR

Screwdriver for the Dynamic Scanbody System

Ref. 43.621.410.01-2

Screwdriver with manual handle
Standard length: 21 mm




Ref. 43.624.410.01-2

Contra-angle
Length: 24 mm



Ref. 43.621.415.01-2

Tiny Screwdriver with manual handle
Length: 21 mm



Ref. 43.620.411.01-2

Multi-Unit
Contra-angle
Length: 20 mm



COMPLEMENTS

Manual handle

Made of stainless steel.
They are used to connect screwdriver bits with the contra-angle connection



Large manual handle for laboratory

Ref. 49.601.000.03-2

Ideal to manipulate models in the laboratory
Length: 55.65 mm



Manual handle for clinic

Ref. 49.601.000.01-2

Clinic handle: used to position the prosthesis in the mouth prior to torque control in the clinic.
Length: 15.65 mm



Universal manual torque wrench prosthetic

Ref. 11.990.990.07-2

Torque wrench
4 mm square connection.
Torque 10-35N.c



Dynamic Screw Transfer

Ref. 49.413.000.01-2

Manual torque wrench adapter prosthetic

Piece to connect the screwdriver with contra-angle connection to the torque wrench.



Universal Manual torque wrench adapter

Ref. 49.604.000.05-2

4 mm Square connection



Straumann Manual torque wrench adapter

Ref. 49.604.000.07-2

Straumann connection



Nobel Biocare Manual torque wrench adapter

Ref. 49.604.000.08-2



MIS Manual torque wrench adapter

Ref. 49.604.000.09-2

DYNAMIC SCREWDRIVERS

Screwdriver with hexalobular head, exclusively to the 3.0 Dynamic Abutment System.
Lengths: 18, 24, 32 mm

Hexalobular 1,70 mm. Length: 18 mm

Ref. 43.618.201.01-2



Hexalobular 1,70 mm. Length: 24 mm

Ref. 43.624.201.01-2



Hexalobular 1,70 mm Length: 32 mm

Ref. 43.632.201.01-2



DAS MU SYSTEM COMPONENTS




Ratchet
49.409.000.01-2



Analog
22.612.209.01-2



MU Scanbody 8 mm
53.422.209.02-2 (Non-engaging*)



Screwdriver
43.321.316.01-2
43.322.316.01-2



Titanium Abutment
35.312.209.21-2 (Non-engaging*)
35.322.209.21-2 (Engaging*)



MU Dynamic Scanbody
52.408.137.01-2



Mu ANG Insertion tool
49.422.000.01-2



Digital Analog
34.312.209.01-2



Dynamic Scanbody Adaptor
50.312.209.01-2



Healing Cap Regular
40.320.003.88-2



Digital Analog Positioner
49.309.000.01-2



Screwdriver Adaptor
43.621.410.01-2
43.624.410.01-2



Healing Cap Wide
40.320.003.89-2



MU ScAnalog
23.412.209.01-2



Impression coping
29.301.000.11-2 (Non-engaging*)
29.301.000.10-2 (Engaging*)




MU Scanbody 4,5 mm
53.412.209.01-2



Reference Scanbody


54.322.209.31-2 (Non-engaging*)
54.312.209.31-2 (Engaging*)



Peek Pins


TYPE A

49.414.000.01-2 (6 mm)
49.415.000.01-2 (9 mm)
49.416.000.01-2 (13 mm)



TYPE B

49.414.000.02-2 (6 mm)
49.415.000.02-2 (9 mm)
49.416.000.02-2 (13 mm)



TYPE C

49.414.000.03-2 (6 mm)
49.415.000.03-2 (9 mm)
49.416.000.03-2 (13 mm)



TYPE D

49.416.000.04-2 (13 mm)



TYPE E

49.416.000.05-2 (13 mm)



CAPS

Regular

49.418.000.01-2 (3,8 mm)
49.419.000.01-2 (6 mm)
49.420.000.01-2 (8 mm)



Wide

49.418.000.02-2 (3,8 mm)
49.419.000.02-2 (6 mm)
49.420.000.02-2 (8 mm)



MU Dynamic TiBase

31.312.209.01-2 (Non-engaging*)
31.312.209.01-2 (Engaging*)



MU Dynamic 3TiBase

31.322.209.21-2 (Non-engaging*)



Dynamic Screw

41.320.040.01-2



Provisional (temporary) Dynamic Screw

41.320.050.02-2



Straight Screw

40.320.003.06-2



Dynamic Screwdriver

43.618.201.01-2 (18 mm)
43.624.201.01-2 (24 mm)
43.632.201.01-2 (32 mm)



Screwdriver Hex.1,2

43.601.103.02-2



MU DMTone

33.390.716.01-2 Shank Ø3
33.490.716.01-2 Shank Ø4
33.690.716.01-2 Shank Ø6

TALLADIUM GUARANTEE

TERMS AND CONDITIONS

These guarantee terms and conditions ("T&C") cover the entire range of Talladium products ("Products"), manufactured by TALLADIUM ESPAÑA S.L. and distributed by Geoda Medical S.L. or official dealers. The guarantee described in these T&C is exclusively in benefit of the clinician ("Clinician") and of the dental technician ("Technician") and not for the benefit of third parties or institutions, including patients.

GUARANTEE PERIOD

TALLADIUM ESPAÑA S.L. offers a lifelong guarantee for its entire range of products starting from the date of issue of the invoice.

GUARANTEE SCOPE

Subject to the limitations and exceptions described in these T&C, TALLADIUM ESPAÑA S.L. will offer the following benefits:

QUALITY: If there are defects in the materials or in the manufacturing of the Product, TALLADIUM ESPAÑA S.L. will replace the Product with no additional cost.

SAFETY: If, having complied with all the product indications, the prosthesis should have to be made again, due to a fault in the Dynamic Abutment or Dynamic Titanium Base system, TALLADIUM ESPAÑA S.L. will replace the abutments and screws necessary to remake the prosthesis, as well as the costs derived from its manufacturing.

In case of having used our products and having complied with all the product indications, the implants suffer any damage, TALLADIUM ESPAÑA S.L. will pay the cost of the implants. This coverage will only be valid during the first 6 months after the collocation of the prosthesis which includes our products.

CLAIM REQUIREMENTS AND PROCEDURE

To receive the benefits indicated in these T&C, the treating Clinician must satisfy the following requirements:

- a) The claim must be notified to TALLADIUM ESPAÑA S.L. within (30) days since the date the claimed defect was detected.
- b) This requires that the Clinician or Technician must contact the customer service department by telephone or by e-mail to make the claim.
- c) A claim form will be completed, which, together with a document or report which justifies the faulty Product and the faulty Product itself, will be sent by the customer to TALLADIUM ESPAÑA S.L. offices, within the previously indicated period.
- d) Clinicians or Technicians presenting a claim in agreement with these T&C must be up to date in any payments owing to TALLADIUM ESPAÑA S.L. or to any of its subsidiaries, at the time when the claim form is presented.
- e) All the use procedures of our Products must be carried out in agreement with the instructions of TALLADIUM ESPAÑA S.L. as well as in accordance with commonly accepted dentistry practices.
- f) The expenses derived from this procedure will be assumed by the customer. The return shipping costs will be assumed by TALLADIUM ESPAÑA S.L. in all those cases covered by these T&C. Regardless of the guarantee rights, claims should be notified as soon as possible in order to comply with regulatory requirements.

GENERAL LIMITATIONS OF THIS GUARANTEE

With the exception of the guarantee described in these T&C, neither TALLADIUM ESPAÑA S.L. nor its representatives, nor third parties manufacturing or distributing the Products, represent or offer a guarantee, agreement or any other express or implicit, oral or written, commitment, with respect to the Products (without limitation), including guarantees involved in the marketing, durability or suitability for individual uses or purposes. In addition and within the maximum extent permitted by the relative law, TALLADIUM ESPAÑA S.L. rejects (on its own behalf, and on behalf of its representatives and third parties that manufacture or distribute Products) any responsibility with respect to any direct or indirect damage caused, which may result from or be a consequence of the design, composition of the dental prosthesis into which the Products are integrated.


GUARANTEE EXCLUSIONS

TALLADIUM ESPAÑA S.L. limits this guarantee to:

- Transformed abutments that form part of the dental prosthesis. But not the screws used to anchor them.
- Those products that are not used with the accessories and parts marketed by Talladium España

AMENDMENT OR SUSPENSION OF THE GUARANTEE


TALLADIUM ESPAÑA S.L. reserves the right to amend or withdraw these T&C at any time and without prior notification. Any modification or suspension shall not affect products already placed in patients.



This printed version is probably
outdated and may not include all
products or compatibilities.

**Scan and download the
latest version of this catalogue**

www.dynamicabutment.com

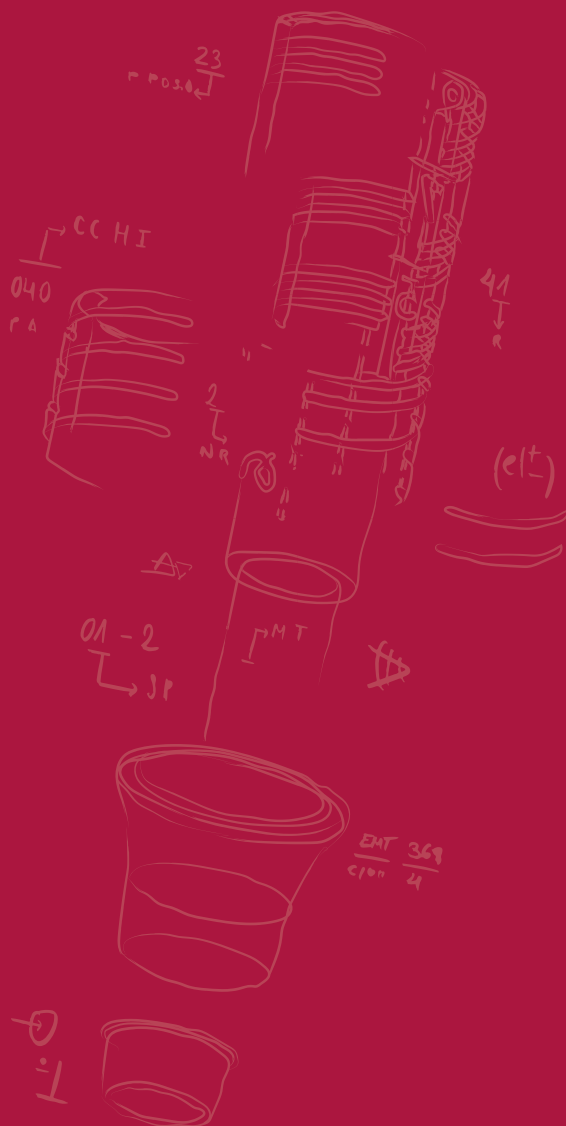

**DYNAMIC
ABUTMENT
SOLUTIONS**

Virginia Woolf, 17
25005 · Lleida (Spain)

INTERNATIONAL +34 873 450 709
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com



www.dynamicabutment.com

