


DIGITAL SOLUTIONS
PRODUCT
REFERENCES
CATALOGUE



DYNAMIC ABUTMENT SOLUTIONS

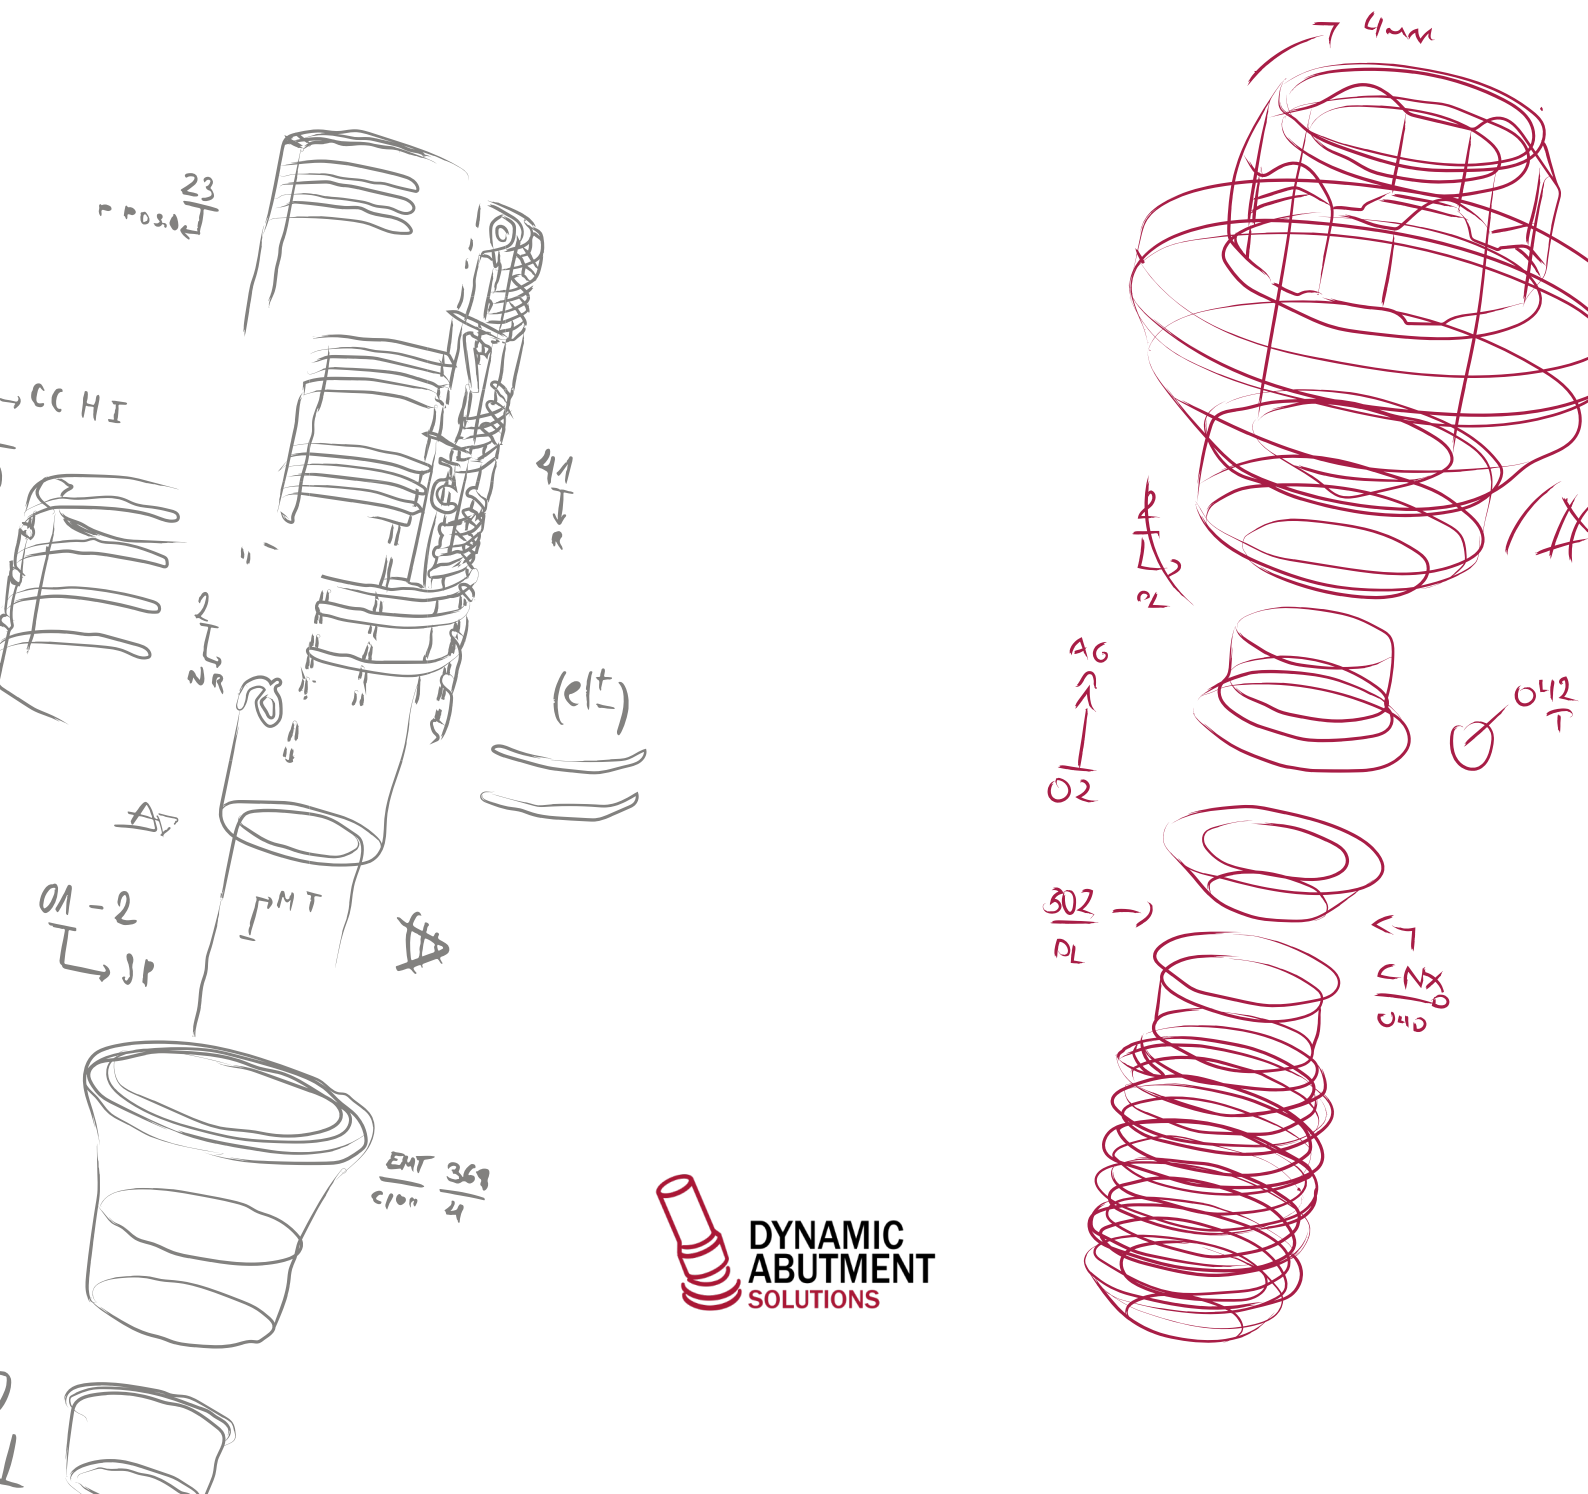

Virginia Woolf, 17
25005 · Lleida (Spain)

INTERNATIONAL +34 873 450 709
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com



Dynamic Abutment Solutions is the trademark of the manufacturer Talladium España S.L. The information included in this catalogue is exclusively addressed to professionals in dental sector.

All commercial trademarks mentioned herein are fully registered by their respective companies, and the images that appear are just to provide an orientation. Talladium reserves the right to modify this document without previous notice. Talladium is not responsible for the inadequate execution of these products if the warning indications corresponding to every reference are not contemplated.

Ask about the products available with CE legislation. Some of the products are not authorized for sale and distribution or do not have a sales license in some countries according to other legislations. Information: das@dynamicabutment.com.

INDEX

LIST OF COMPATIBILITIES AVAILABLE	5
COMPATIBILITIES AVAILABLE	9
COMPATIBILITIES AND REFERENCES	43
DAS LIBRARIES	332
MULTI-UNIT DAS LIBRARIES	333
DYNAMIC SCREWS TECHNICAL SPECIFICATIONS	334
STRAIGHT SCREWS TECHNICAL SPECIFICATIONS	336
SCREWDRIVERS AND STRAIGHT SCREWS	337
DYNAMIC MILLING TOOL SPECIFICATIONS	338
SCREWDRIVERS AND COMPLEMENTS	340
DAS MU SYSTEM COMPONENTS	341
INTERNAL DAS MU SYSTEM COMPONENTS	343

LIST OF COMPATIBILITIES AVAILABLE

AB	CONEXÃO SISTEMA DE PRÓTESE	HAHN IMPLANT (GLIDEWELL)	NEOBIOTECH	SIN IMPLANTS
ACE			NEODENT	
ADIN	CORTEX	HIOSSSEN	NEOSS	SOUTHERN IMPLANTS
ALFA-GATE	C-TECH	HI-TEC	NOBEL BIOCARE	STERI-OSS
ALPHABIO	COWELLMEDI	IBS		STERNGOLD
ALPHA-DENT	DENTAL TECH	IDO IMPLANTS	NORIS MEDICAL	STRAUMANN
ANCLADEN	DENTAURUM	IHDE DENTAL (IMBIODENT)	NORMON	SURCAM DENTAL
ANKYLOS	DENTEGRIS	IMPLANT DIRECT	NOVA IMPLANTS	SYBRON IMPLANT SOLUTIONS
ANTHOGYR	DENTEM	IMPLANT GENESIS	OSSTEM IMPLANT	SYSTHEX
ARDS	DENTIS			
ASTRA	DENTIUM	IMPLANTSWISS	OSTEOPLUS	TBR
AVINENT	DIO IMPLANTS	INTRA-LOCK	OXY	TITANIUM-FIX
B&W		JDENTALCARE	PALTOP	TREE-OSS
BEGO	DITRON	KEYSTONE	P-I BRANEMARK	TRI DENTAL IMPLANTS
BIOCONCEPT	DMI DENTAL SUPPLY	KLOCKNER	PHIBO	TRINON
BIOGENESIS	DSP BIOMEDICAL	KUWOTECH	POINT IMPLANT	UFIT
BIOHORIZONS	EASY IMPLANT	LASAK	PROCLINIC	VULKAN IMPLANTS
BIOMET 3i	ECKERMANN	LEADER	PROTEG IMPLANTS	WARANTEC (ONEPLANT)
BIOLOK	ELITE MEDICA	MEDENTIKA	RADHEX	WIN
BIONER	EUROTEKNIKA	MEDENTIS	REFLECT	XIVE
BIOTEC	F&B IMPLANT (FIT & BRILLIANT)	MEGAGEN	RITTER	YES IMPLANT
BIOTEM		MICRODENT	ROOTT	YOUSE IMPLANTS
BREDENT MEDICAL	GALIMPLANT	MIS	SEWON MEDIX	ZIACOM
BTI	GC TECH	MONOIMPLANT	SIC INVENT	ZIMMER
BTK	GMI (ILERIMPLANT)	MOZO-GRAU (TICARE)		
CAMLOG	GT MEDICAL	MPI	SIGNO VINCES	

MULTI-UNIT
DAS SYSTEM

DYNAMIC
DAS SYSTEM

COMPATIBILITIES AVAILABLE



AB	MODEL	IMPLANT	PLATFORM	CODE	
	I2	3,5/3,75/4,2/4,5/ 5/6	STANDARD	0040	132
			STANDARD	0040	132
	I22	3,75/4,22	STANDARD	0040	132
	I5	3,5/3,75/4,2/4,5/ 5/6/7/8	STANDARD	0040	132
			STANDARD	0040	132
	I55	3,75/4,2/4,5 5/6/7/8	STANDARD	0040	132
			STANDARD	0040	132
	I10	4,2/5	STANDARD	0040	132
	I15	6/7/8	STANDARD	0040	132
	MULTI UNIT D1-P64	Multi Unit D1-P64	UNIVERSAL	0025	103
ACE	MODEL	IMPLANT	PLATFORM	CODE	
	EXTERNAL HEX	3,3	NP 3,5	0023	99
		3,75/4	RP 4,1	0024	101
		4,75	WP 5	0058	164
	INFINITY TRI-CAM	3,5	3,5	0026	106
		4,3	4,3	0027	108
		5	5	0028	110
	INFINITY INTERNAL HEX	3,7/4,1	3,5	0040	131
		4,7/5,1	4,5	0041	136
	INFINITY OCTAGON	3,3	RP 4,8	0037	124
		4,1	RP 4,8	0037	124
		4,8	RP 4,8	0037	124
		4,8	WP 6,5	0096	203
	MULTI UNIT	Universal	UNIVERSAL	0025	103
ADIN	MODEL	IMPLANT	PLATFORM	CODE	
	SWELL	3,3	3,45	0040	132
		3,3	3,45	0042	132
		3,75/4,2	3,6	0040	132

COMPATIBILITIES AVAILABLE

ADIN	MODEL	IMPLANT	PLATFORM	CODE	
	SWELL	3,75/4,2	3,6	0042	132
		5	4	0040	132
		5	4	0042	132
		6	4,6	0040	132
		6	4,6	0042	132
	TOUAREG-S / TOUAREG-OS	3,5	3,45	0040	132
		3,5	3,45	0042	132
		3,75/4,2	3,6	0040	132
		3,75/4,2	3,6	0042	132
		5	4	0040	132
		5	4	0042	132
		6	5	0040	132
		6	5	0042	132
	TOUAREG CLOSEFIT	2,75	UNP	0188	282
		3	NP	0145	241
		3,5	RP	0021	93
		4,3/5	WP	0022	96
	TRIPLE	3,5/3,75/4,2/5/6	STANDARD	0040	132
		3,5/3,75/4,2/5/6	STANDARD	0042	132
	MULTI UNIT TMA	Universal	UNIVERSAL	0025	103
ALFA-GATE	MODEL	IMPLANT	PLATFORM	CODE	
	BIOACTIVE/POROUS/ TRIO/MAX	3,3/3,75/4,2/ 4,7/5,2/6	SP	0040	132
	CONICAL	3,5	NP	0021	93
		4,3/5	RP	0022	96
ALPHABIO	MODEL	IMPLANT	PLATFORM	CODE	
	INTERNAL HEX CONNECTION (IH) SPI	3,3/3,75/4,2/5/6	UNIVERSAL	0040	132
	INTERNAL HEX CONNECTION (IH) ICE	3,7/3,75/4,2/ 4,65/5,3	UNIVERSAL	0040	132

COMPATIBILITIES AVAILABLE



ALPHABIO	MODEL	IMPLANT	PLATFORM	CODE	
	INTERNAL HEX CONNECTION (IH) DFI	3.3/3.75/4.2/5	UNIVERSAL	0040	132
	INTERNAL HEX CONNECTION (IH) ATID	3.3/3.75/4.2/5/6	UNIVERSAL	0040	132
	INTERNAL HEX CONNECTION (IH) NEO	3.75/4.2/5	3.5	0040	132
	CONICAL HEX CONNECTION (CHC) NICE	3.2	NARROW	0136	238
	CONICAL HEX CONNECTION (CHC) NEO	3.2/3.5	NARROW	0136	238
	CONICAL STANDARD CONNECTION (CS)	3.75/4.2/5	STANDARD	0169	263
	MULTI UNIT ABUTMENT	-	UNIVERSAL	0195	288
ALPHA-DENT	MODEL	IMPLANT	PLATFORM	CODE	
	CLASSIC CONUS	3.3/3.75	3	0265	331
	ACTIVE CONUS	3.25/3.75	3	0265	331
ANCLADEN	MODEL	IMPLANT	PLATFORM	CODE	
	ANCLALOCK	3.75/4.25/5	3.5	0040	132
ANKLYOS	MODEL	IMPLANT	PLATFORM	CODE	
	ANKYLOS	3.5	3.5	0075	175
		4.5	4.5	0075	175
		5.5	5.5	0075	175
		7	7	0075	175
	BALANCE BASE NARROW	Universal	UNIVERSAL	0183	275

COMPATIBILITIES AVAILABLE



ANTHOGYR	MODEL	IMPLANT	PLATFORM	CODE	
	AXIOM BL REG / PX	3,4	3,4	0161	252
		4	4	0149	242
		4,6	4,6	0149	242
		5,2	5,2	0162	255
	ANTHOFIT HE	3,5/3,75/4	R (4,1)	0024	101
		5	L (5)	0058	164
	OSSFIT	3,5/4,2	4,8	0074	173
		3,5/4,2	4,8	0037	124
		5	6,5	0096	203
	MULTI UNIT	4,8	UNIVERSAL	0163	257
ARDS	MODEL	IMPLANT	PLATFORM	CODE	
	SMART	3,75/4,2/4,5	3,75	0040	132
	CLASSIC	3,3/3,75/4,2/5/6	3,75	0040	132
	PREMIUM	3,3/3,75/4,2/5/6	3,75	0040	132
	CIT	3,3/3,75/4,2/5/6	3,75	0040	132
ASTRA	MODEL	IMPLANT	PLATFORM	CODE	
	YELLOW	3	YELLOW (X-ESTRECHA)	0109	210
	AQUA	3,5/4	AQUA(ESTRECHA)	0004	52
	LILAC	4,5/5	LILAC (ANCHA)	0005	55
	UNIABUTMENT CONO 20°	Regular/Wide	REGULAR/WIDE	0066	172
	UNIABUTMENT CONO 45°	Regular/Wide	REGULAR/WIDE	0067	
	EVOLUTION/ PRIMETAPER	3	3,0	0090	196
		3,6	3,6	0006	57
		4,2	4,2	0007	60
		4,8	4,8	0091	198
		5,4	5,4	0092	201
	DS OMNITAPER EV	3	XS	0090	196

COMPATIBILITIES AVAILABLE



ASTRA	MODEL	IMPLANT	PLATFORM	CODE	
	DS OMNITAPER EV	3,4	S	0006	57
		3,8	M	0007	60
		4,5	L	0091	198
		5,5	XL	0092	201
	EVOLUTION (CONE EXTERNO 33°)	-	UNIVERSAL	0008	62
	MULTIBASE ABUTMENT (SMARTFIX CONCEPT)	-	UNIVERSAL	0258	321
AVINENT	MODEL	IMPLANT	PLATFORM	CODE	
	HE/EC	3,3/3,5/4	3,5	0023	99
		3,3/3,8/4/4,2/ 4,8/4,5/5	4,1	0024	101
		4,8	5,1	0061	170
	HI/IC	3,1/3,5/4	3,5	0040_B	135
		3,3/3,8/4/4,2/ 4,8/4,5/5	4,1	0040_B	135
	TRANSEPITELIAL	-	REGULAR	0025	103
B&W	MODEL	IMPLANT	PLATFORM	CODE	
	HEXÁGONO EXTERNO	3,75/4	4,1	0024	101
		5	5	0058	164
	CÓNICO HEXAGONO INTERNO CIH	3,3/4	4	0040	132
		3,3/4	4	0042	132
BEGO	MODEL	IMPLANT	PLATFORM	CODE	
	RS/RSX	3,0	3,0	0049	153
	S/RI/RS/RSX	3,25/3,75	3,67	0050	154
		4,1	4,1	0051	156
		4,5	4,5	0052	158
		5,5	5,5	0081	180
	MINI	2,7/2,9/3,1	MINI	0187	280
	MULTIPLUS	-	UNIVERSAL	0150	244

COMPATIBILITIES AVAILABLE



BIOCONCEPT	MODEL	IMPLANT	PLATFORM	CODE	
	BC TISSUE LEVEL STANDARD	3.3/4.1/4.8	REGULAR	0037	124
	BC TISSUE LEVEL STANDARD PLUS	4.8	REGULAR	0037	124
	BC TISSUE LEVEL TAPERED EFFECT	4.8	REGULAR	0037	124
	BC BONE LEVEL	3.3	NARROW	0033	118
		4.1/4.8	REGULAR	0035	121
	BV TAPERED BONE LEVEL	3.5	NARROW	0029	112
		4/4.5/5	REGULAR	0030	115
BIOGENESIS	MODEL	IMPLANT	PLATFORM	CODE	
	3ICON	3.3	MINI (PINK)	0023	99
		3.75/4/4.3/4.5	REGULAR (BLUE)	0024	101
		5/5.5	WIDE (YELLOW)	0058	164
	ATICON	3.5/4/4.5/5	BLUE	0005	55
	ITICON	3.5/4.1/4.8	4.8	0037	124
BIOHORIZONS	MODEL	IMPLANT	PLATFORM	CODE	
	EXTERNAL	3.5	3.7 (YELLOW)	0023	99
	TAPERED INTERNAL	3/3.4	3 (GREY)	0102	207
		3.8	3.5 (YELLOW)	0040	132
		4.6	4.5 (GREEN)	0041	137
		5.8	5.7 (BLUE)	0080	178
	TAPERED PLUS	3.8	3 (GREY)	0102	207
		4.6	3.5 (YELLOW)	0040	132
		5.28	4.5 (GREEN)	0041	137
	MOUNT-FREE TAPERED INTERNAL	3/3.4	3 (GREY)	0102	207
		3.8	3.5 (YELLOW)	0040	132

COMPATIBILITIES AVAILABLE

BIOHORIZONS	MODEL	IMPLANT	PLATFORM	CODE	
	MOUNT-FREE TAPERED INTERNAL	4,6	4,5 (GREEN)	0041	137
		5,8	5,7 (BLUE)	0080	178
	TAPERED PRO	3,8	3 (GREY)	0102	207
		4,2/4,6	3,5 (YELLOW)	0040	132
		5,2	4,5 (GREEN)	0041	137
	TAPERED SHORT	4,6	3,5 (YELLOW)	0040	132
		5,8	4,5 (GREEN)	0041	137
	TAPERED PTG	4,2	3,5 (YELLOW)	0040	132
	TAPERED IM (IMMEDIATE MOLAR)	7/8	5,7 (BLUE)	0080	178
	TAPERED TISSUE LEVEL	3/3,8	3,5 (YELLOW)	0040	132
		4,6	4,5 (GREEN)	0041	137
		5,8	5,7 (BLUE)	0080	178
	TAPERED PRO CONICAL	3,3/3,8	NARROW (GREY)	0119	216
		4,2/4,6/5,2	REGULAR (YELLOW)	0120	219
	MULTI UNIT	-	UNIVERSAL	0025	103
BIOMET 3i	MODEL	IMPLANT	PLATFORM	CODE	
	OSSEOTITE EXTERNAL HEX	3,25	3,4	0003	50
		3,75/4	4,1	0024	101
		5	5	0058	164
		6	6	0179	
	CERTAIN	3,25/4	3,4	0001	44
		4/5	4,1	0002	47
		5	5	0057	162
	LOW PROFILE	-	UNIVERSAL	0025	103
BIOLOK	MODEL	IMPLANT	PLATFORM	CODE	
	HEXÁGONO EXTERNO	3,45	3,45	0003	50

COMPATIBILITIES AVAILABLE



BIONER	MODEL	IMPLANT	PLATFORM	CODE	
	IKELT / BIKELT	3.3/3.75/4	4.1	0024	101
	IKELT	5	5	0058	164
	HIKELT	3.8	3.95	0040	132
		4.7	4.9	0041	137
	TOPDM	3.5	3.5	0021	93
		4	4	0021	93
		5	5	0021	93
	SHORT DM	4/5/6	UNIVERSAL	0021	93
	HIBIKELT	4/5	UNIVERSAL	0021	93
	TRANSEPITELIAL A-5M	Transepitelial A-5M	REGULAR	0025	103
BIOTEC	MODEL	IMPLANT	PLATFORM	CODE	
	SPR/CIM	3.3	3.3	0040	132
		3.75	3.75	0040	132
	SPR/SPTT/CIM	4.2	4.2	0040	132
		5	5	0040	132
BIOTEM	MODEL	IMPLANT	PLATFORM	CODE	
	AR FIXTURE	3.7/4/4.5	REGULAR	0030	115
BREDENT MEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	NARROW SKY	3.5	NP 3.5	0110	212
	BLUE SKY	3.5/4/4.5/5.5	4	0111	214
	BLUE SKY CLASSIC	3.5/4/4.5	4	0111	214
	COPA SKY	3.5/4/4.5/5/6	3.3	0251	317

COMPATIBILITIES AVAILABLE

BTI	MODEL	IMPLANT	PLATFORM	CODE	
	EXTERNA TINY	2,5/3,9/3/3,3/ 3,5/3,75	TINY 3,5	0009	65
	EXTERNA UNIVERSAL	3,75/4	UNIVERSAL 4,1	0024	101
	EXTERNA UNIVERSAL PLUS	4,5/5	UNIVERSAL PLUS 4,1	0024	101
	EXTERNA	4,5/5/5,5	ANCHA 5,5	0060	168
	INTERNA	3,3/3,5/3,75	3,5	0257	320
	INTERNA UNIVERSAL	3,3/3,5/3,75/ 4/4,25	UNIVERSAL 4,1	0010	67
	INTERNA UNIVERSAL PLUS	4,5/5/5,5	UNIVERSAL PLUS 4,1	0010	67
	INTERNA ANCHA	5,5/6/6,25	ANCHA 5,5	0059	166
	MULTI-IM	converter 4,1	UNIVERSAL 4,1	0151	245
BTK	MODEL	IMPLANT	PLATFORM	CODE	
	KLASSIC / KONIC	3,25	3,4 EN	0003	50
	KLASSIC / KONIC/LINE PLUS	3,25PL/3,75/4	4,1 ER	0024	101
	IS +/-LINE PLUS IS+	3,3/3,7/4,1/4,8/6	DR	0029	112
	BT SAFE BL	3,3/3,7/4,1/4,8	KR	0029	112
	KLASSIC / KONIC	3,25/4	3,5 IR	0040	132
		3,25/4	3,5 IR	0042	132
	LINE PLUS IC+	3,25/3,75/4,25/5	LR	0040	132
CAMLOG	MODEL	IMPLANT	PLATFORM	CODE	
	CAMLOG SCREW-LINE/ PROGRESSIVE-LINE	3,3	3,3	0087	192
		3,8	3,8	0011	69
		4,3	4,3	0012	72

COMPATIBILITIES AVAILABLE



CAMLOG	MODEL	IMPLANT	PLATFORM	CODE	
	CONELOG SCREW-LINE/ PROGRESSIVE-LINE	5	5	0088	194
		3.3	3.3	0119	216
		3.8	3.8	0120	219
		4.3	4.3	0121	222
CONEXÃO SISTEMA DE PRÓTESE	MODEL	IMPLANT	PLATFORM	CODE	
	NP 24° FLESH GOLD	3.5/3.75/4.3/5	UNIVERSAL	0021	127
	NP 24° FLASH	3.5/4.3/5	UNIVERSAL	0021	127
	NP 24° PTERYTRANS EX	3.5	UNIVERSAL	0021	127
	NP 24° SHORT® NP BLT	3.75/4.3	UNIVERSAL	0021	127
	NP 24° TORQ	3.5/3.75/4	UNIVERSAL	0021	127
	NP 24° EXPAND	3.75/4/5	UNIVERSAL	0021	127
CORTEX	MODEL	IMPLANT	PLATFORM	CODE	
	INTERNAL HEX DYNAMIX	3.3/3.8/4.2/5/6	3.75	0040	132
		3.3/3.8/4.2/5/6	3.75	0040	132
	INTERNAL HEX SATURN	3.8/4.2	3.5	0040	132
	CONICAL DYNAMIX	3	NP	0109	210
		3.3/3.8/4.2	RP	0004	52
		5/6	WP	0005	55
	CONICAL CLASSIX	3.3/3.8/4.2	RP	0004	52
		5/6	WP	0005	55
	CONICAL MAGIX	3.3/3.8/4.2	RP	0004	52
	MULTI UNIT	-	UNIVERSAL	0025	103
C-TECH	MODEL	IMPLANT	PLATFORM	CODE	
	EL ESTHETIC LINE	3.8/4.3/5.1	4	0246	312
	MULTI UNIT	-	UNIVERSAL	0245	311

COMPATIBILITIES AVAILABLE



COWELMEDI	MODEL	IMPLANT	PLATFORM	CODE	
	INNO - SUBMERGED TYPE	3,5/4/4,5/5/6	UNIVERSAL	0030	115
	INNO - EXTERNAL TYPE	5,0/6,0	5,1	0061	170
	MULTI S&A ABUTMENT Ø 4,5 MM	Multi S Abutment	UNIVERSAL	0193	286
DENTAL TECH	MODEL	IMPLANT	PLATFORM	CODE	
	IMPLOGIC	4,5	4,5 (BLUE)	0041	137
DENTAURUM	MODEL	IMPLANT	PLATFORM	CODE	
	TIOLOGIC	3,3	SMALL	0130	233
		3,7/4,2	MEDIUM	0131	234
		4,8/5,5	LARGE	0132	235
DENTEGRIS	MODEL	IMPLANT	PLATFORM	CODE	
	SLS-STRAIGHT	4,5	4,5	0041_B	140
	SINUS-LIFT	4,5	4,5	0041_B	140
	S&T IMPLANTS	4,5	4,5	0041_B	140
DENTEM	MODEL	IMPLANT	PLATFORM	CODE	
	-	-	REGULAR	0030	115
DENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	ONEQ-SL	3	NARROW	0014	76
		3,9/4,2/4,7/5,2	REGULAR	0030	115
		6/7/8	WIDE	0030	115
	S-CLEAN TAPERED / TAPERED II	3,7	MINI	0030	115
		4,1/4,3	REGULAR	0030	115
		4,8	WIDE	0030	115

COMPATIBILITIES AVAILABLE

DENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	S-CLEAN STRAIGHT	4,1/4,8	4,1/4,8	0030	115
	S-CLEAN SAVE	5,5/6	5,5/6	0030	115
	SQ-SL	3,5	NARROW	0014	76
		4/4,5/5	REGULAR	0030	115
		6/7/8	WIDE	0030	115
	E-CLEAN	3,5	MINI	0023	99
		4,1	REGULAR	0024	101
		5,1	WIDE	0061	170
DENTIUM	MODEL	IMPLANT	PLATFORM	CODE	
	NR LINE	3,1	3,2	0190	283
		3,1	3,6	0190	283
		3,6	3,6	0191	284
		4,3	4,3	0191	284
		5	5	0191	284
		6	6	0191	284
	MULTI UNIT NR LINE		5	0192	285
	SIMPLELINE II	3,8/4,3	4,8	0074	173
		3,8/4,3	4,8	0037	124
		4,3/4,8	6,5	0096	203
	SUPERLINE/SUPERLINE II/IMPLANTUM	3,4	3,6	0030	115
		3,8	4	0030	115
		4,3	4,5	0030	115
		4,8	5	0030	115
		4,8	6	0030	115
	MULTI UNIT SUPERLINE AND IMPLANTUM	-	4,5	0193	286
DIO IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	SM SYSTEM	3,8/4,1	NARROW	0076	
		4,5/5/5,3	REGULAR/WIDE	0013	75
	UF II NARROW	3/3,3	NARROW	0014	76

COMPATIBILITIES AVAILABLE

DIO IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	UF II	3,8/4/4,5/5/5,5	REGULAR	0030	114
	EXTERNAL	3,3/3,8	NARROW 3,5	0023	99
		3,75/4/4,5	REGULAR 4,1	0024	101
		5/5,3/5,5/6	WIDE 5,1	0061	170
	INTERNAL OCTA	-	4,8	0074	173
	MULTI UNIT	-	UNIVERSAL	0247	313
DITRON	MODEL	IMPLANT	PLATFORM	CODE	
	ULTIMATE MATRIX	3,75/4,2	3,75	0040	132
		5	4	0040	132
		6	4,6	0040	132
	MPI MATRIX	3,5	3,5	0040	132
		3,75	3,75	0040	132
		4,2	4,2	0040	132
		5	5	0040	132
		6	6	0040	132
DMI DENTAL SUPPLY	MODEL	IMPLANT	PLATFORM	CODE	
	DCI/DSI	3,3/3,5/3,75/ 4,2/5/6	3,75	0040	132
DSP BIOMEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	HEXÁGONO EXTERNO	3,75/4/5/ 3,5/3,8/4,3	4,1	0024	101
EASY IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	MASTER C	3,5	3,5 (OCEAN)	0004	52
		4	4 (OCEAN)	0004	52
		4,5	4,5 (LILAS)	0030	115
		5	5 (LILAS)	0030	115

COMPATIBILITIES AVAILABLE



EASY IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	MASTER S	3.3	3.3 (OCEAN)	0004	52
		3.75	3.75 (LILAS)	0030	115
		4.25	4.25 (LILAS)	0030	115
		4.75	4.75 (LILAS)	0030	115
	MASTER L	3.3	3.3 (LILAS)	0030	115
		3.75	3.75 (LILAS)	0030	115
		4.25	4.25 (LILAS)	0030	115
		4.75	4.75 (LILAS)	0030	115
	MINI	3	3	0176	271
	HEXCEL-S	3.3	3.3	0003	50
		3.75	4.1	0024	101
		4.25	4.1	0024	101
		4.75	5	0058	164
	MULTI UNIT CONICAL ABUTMENT	-	UNIVERSAL	0025	103
ECKERMANN	MODEL	IMPLANT	PLATFORM	CODE	
	ALL-SPIRAL	4	REGULAR	0069	
	DUPLO	4	REGULAR	0070	
	HEXAGON	3/3.5/4/4.5/5	4.1	0024	101
	WINNER	3/3.5/4	3.5	0040_B	135
		3/3.5/4	3.5	0042	132
		4/4.5/5	4.5	0041_B	140
		4/4.5/5	4.5	0043	
ELITE MEDICA	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA	3.75	NARROW	0023	99
		4	REGULAR	0024	101
		5	WIDE	0061	170

COMPATIBILITIES AVAILABLE

EUROTEKNIKA	MODEL	IMPLANT	PLATFORM	CODE	
	NATURACTIS	3,5	3,4	0004	52
		4	3,8	0004	52
		4,5	4,3	0004	52
		5	4,8	0004	52
	UNEVA	3,6	4,1	0024	101
		4,1	4,1	0024	101
	UNEVA (PLATFORM SWITCHING)	4,8	4,1	0024	101
		6	4,1	0024	101
	NATEA	3,6/4,1/4,8	NARROW	0004	52
		3,6/4,1/4,8	REGULAR	0004	52
		6	WIDE	0004	52
	AESTHETICA	4,1	4,8	0074	173
		4,1	4,8	0037	124
		4,8	6,5	0096	203
	NATURALL	3,5	NARROW	0004	52
		4/4,5	REGULAR	0004	52
		5	WIDE	0004	52
	IBONE E/IBONE S	3,8/4,3/4,8	3,5	0004	52
		4,8/5,5/6,2	4,3	0004	52
	IBONE G	4,8/5,5	RP	0037	124
		5,5/6,2	WP	0096	203
	MULTI UNIT TETRA	Universal	UNIVERSAL	0025	103
F&B IMPLANT (FIT & BRILLIANT)	MODEL	IMPLANT	PLATFORM	CODE	
	FA SUBMERGED FIXTURE	3,9	NARROW	0030	115
		4,1/4,4	REGULAR	0030	115
		4,8	WIDE	0030	115
		5,3/5,8/6,3/6,8	ULTRA-WIDE	0030	115
GALIMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA	3,5/4	4	0024	101
		3,5	3,5	0004	52

COMPATIBILITIES AVAILABLE



GALIMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA	4	4	0004	52
		5	5	0004	52
	PILAR MULTI-POSICION RECTO / PILAR MULTI-POSICION ANGULADO	Universal	UNIVERSAL	0025	103
GC TECH	MODEL	IMPLANT	PLATFORM	CODE	
	AADVA STANDARD / TAPERED IMPLANTS	3.3	NARROW	0196	290
		4	REGULAR	0197	291
		5	WIDE	0198	292
GMI (ILERIMPLANT)	MODEL	IMPLANT	PLATFORM	CODE	
	AVANTGARD	3.75/4.25	RP	0243	310
	PHOENIX	3.3/3.75/4	STANDARD 4.1	0024	101
		5	WIDE 5.1	0061	170
	FRONTIER	3.3/3.75/4.25	RP 3.3	0040_B	135
		4.75/5.75	WP 4.3	0041_B	140
	UNIVERSAL	Universal	PS-RP 4.8	0025	103
GT MEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	BEST FIT HEXÁGONO INTERNO	3.7/4.1/4.3/4.8	WIDE	0005	55
		3.7/4.3/4.8	REGULAR	0074	173
		3.7/4.3/4.8	REGULAR	0037	124
	BEST FIT HEXÁGONO EXTERNO	3.5	NARROW	0023	98
		4.1	REGULAR	0024	101
		5.1	WIDE	0061	170
HAHN IMPLANT (GLIDEWELL)	MODEL	IMPLANT	PLATFORM	CODE	
	HAHN TAPERED IMPLANT	3	3	0159	248
		3.5/4.3	3.5/4.3	0021	93
		5	5	0022	96
		7	7	0124	225
	MULTI-UNIT ABUTMENT SYSTEM	Universal	UNIVERSAL	0025	103

COMPATIBILITIES AVAILABLE



HIOSSEN	MODEL	IMPLANT	PLATFORM	CODE	
	ETII SA / ETIII SA	3,5	MINI	0029	112
	ETII SA / ETIII SA / ETIV SA	4/4,5/5	REGULAR	0030	115
	ETIII BA	3,5	MINI	0029	112
		4/4,5/5	REGULAR	0030	115
HI-TEC	MODEL	IMPLANT	PLATFORM	CODE	
	TAPERED SELF THREAD	3,3/3,75	3,5	0040	132
		4,2/5	4,5	0041	137
	LOGIC PLUS	3,5	3,7	0040	132
		4,3	3,9	0040	132
		5/6	4,1	0040	132
	LOGIC / IMPLEX	3/3,5	3,5	0021	93
		3,5	3,9	0021	93
		4,3/5/6	3,9	0022	93
IBS	MODEL	IMPLANT	PLATFORM	CODE	
	MAGIC FC	4/4,5/5/5,5/ 6/6,5	3,8	0030	115
	N.R. FIX	3/3,5	3,8	0030	115
IDO IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	I Do Implant	3,8/4/4,5/5/ 5,5/6/7	UNIVERSAL	0030	115
IHDE DENTAL (IMBIODENT)	MODEL	IMPLANT	PLATFORM	CODE	
	BONE LEVEL PLUS	3,3	3,3	0033	118
		4,1	4,1	0035	121
		4,8	4,8	0035	121

COMPATIBILITIES AVAILABLE



IMPLANT DIRECT	MODEL	IMPLANT	PLATFORM	CODE	
	REPLUS / REPLANT / REACTIVE	3.5/3.7/4.2	3.5	0026	106
		4.3/4.7	4.3	0027	108
		5/5.7	5	0028	110
	LEGACY	3.7/4.2	3.5	0040	132
		4.7/5.2	4.5	0041	137
	SWISHPLANT / SWISHPLUS	4.1/4.8	4.8	0074	173
		4.1/4.8	4.8	0037	124
		4.8/5.7	6.5	0096	203
	SWISHACTIVE	3.3	3	0021	93
		4.1/4.8	3.4	0022	96
	INTERACTIVE	3.2/3.7	3	0021	93
		4.3/5	3.4	0022	96
	SIMPLY ICONIC	3.2/3.7/4.2	PURPLE 3.0	0021	93
		4.7/5.2/5.7	GOLD 3.4	0022	96
	MULTI UNIT ABUTMENT	-	5	0158	247
IMPLANT GENESIS	MODEL	IMPLANT	PLATFORM	CODE	
	AKTIV SYSTEM	3.5/3.75/4.2/5	STANDARD	0040	132
IMPLANTSWISS	MODEL	IMPLANT	PLATFORM	CODE	
	BONE LEVEL	3.3	3.3	0004	52
		3.7	3.7	0030	115
		4.3	4.3	0030	115
		4.8	4.8	0030	115
		5.5	5.5	0030	115
	MULTI UNIT ABUTMENT	Universal	4.8	0025	103
INTRA-LOCK	MODEL	IMPLANT	PLATFORM	CODE	
	UNIHEX	4	REGULAR	0024	101
		4.75	WIDE	0024	101
	INTRAHEX	3.75/4	3.5	0040	132
		4.75	4.5	0041	137

COMPATIBILITIES AVAILABLE



JDENTALCARE	MODEL	IMPLANT	PLATFORM	CODE	
	JDEVOLUTION/ JDEVOLUTION PLUS	3.7	3.7	0040	132
		4.3/5	4	0040	132
		6	5	0040	132
	JD PTERYGO	4	4	0040	132
	JD ICON/JD ICON F	3.9	3.9	0022	96
		4.3	4	0022	96
		5	4.7	0022	96
	JD ICON PLUS	3.7	3.7	0015	79
		4.3	4	0015	79
		5	4.8	0015	79
	JD ICON PLUS T	3.5	3.5	0015	79
		4	3.5	0015	79
		4.5	3.5	0015	79
	CONICAL ABUTMENT	-	UNIVERSAL	0025	103
KEYSTONE	MODEL	IMPLANT	PLATFORM	CODE	
	RESTORE	3.75/4	RD 4.1	0024	101
		5/6	WD 5	0061	170
	INTERNAL TILOBE PRIMA CONNEX	3.3/3.5	3.5	0044	142
		4/4.1	4.1	0045	144
		5	5	0046	146
	INTERNAL TILOBE PRIMA PLUS	3.5	3.5	0044	142
		4.1	4.1	0045	144
		5/6	5	0046	146
KLOCKNER	MODEL	IMPLANT	PLATFORM	CODE	
	ESSENTIAL CONE	3.5/4/4.5	4.5	0054	160
		4.8	6	0071	
	ESSENTIAL CONE PILAR 25°	3.5/4/4.5	4.5	0054	160
	ESSENTIAL CONE OCTACONE 12°	3.5/4/4.5	4.5	0054	160

COMPATIBILITIES AVAILABLE



KLOCKNER	MODEL	IMPLANT	PLATFORM	CODE	
	KL	3.3	NARROW	0023	99
		3.7/4.2	REGULAR	0024	101
		4.7	WIDE	0061	170
	VEGA	3.5	NV	0082	182
		4/4.5	RV	0083	184
	VEGA+	3.6	NV	0082	182
		4.1/4.6	RV	0083	184
	MULTI UNIT PERMANENT	4.2	UNIVERSAL	0173	270
KUWOTECH	MODEL	IMPLANT	PLATFORM	CODE	
	KISPLANT	3.5	SMALL	0030	115
		4/4.5/5/5.5/6	REGULAR&WIDE	0030	115
LASAK	MODEL	IMPLANT	PLATFORM	CODE	
	BIONIQ	2.9	QN (AMARILLO)	0166	259
		3.5	QR (AZUL)	0167	261
		4	QR (AZUL)	0167	261
		5	QR (AZUL)	0167	261
LEADER	MODEL	IMPLANT	PLATFORM	CODE	
	TIXOS INTERNAL HEX	3.3	3.5	0040	132
		3.75	4	0040	132
		3.3/3.75	4.1	0024	101
		5	5	0058	164
MEDENTIKA	MODEL	IMPLANT	PLATFORM	CODE	
	MULTI UNIT	-	UNIVERSAL	0025	103
MEDENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	PREMIUM / ACTIVE MASTER	3.3	3.3 (PINK)	0249	315
		3.75	3.75 (RED)	0125	227

COMPATIBILITIES AVAILABLE

MEDENTIS	MODEL	IMPLANT	PLATFORM	CODE	
	PREMIUM / ACTIVE MASTER	4,1	4,1 (GREEN)	0125	227
		4,8	4,8 (BLUE)	0125	227
	MULTI UNIT	-	UNIVERSAL	0025	103
MEGAGEN	MODEL	IMPLANT	PLATFORM	CODE	
	ANYRIDGE	3,5	SMALL	0015	79
		4/4,5	REGULAR	0015	79
		5/5,5	WIDE	0015	79
	ANYONE INTERNAL	3,5/4/4,5/5/6/7	GENERAL	0030	115
	ANYONE EXTERNAL	3,5	SMALL 3,5	0023	99
		4	REGULAR 4,1	0024	101
		4,5	REGULAR 4,5	0024	101
		5	WIDE 5	0058	164
		6	SUPERWIDE 5,5	0058	164
	CONE ABUTMENT	Universal	3,8	0128	230
		Universal	4,8	0074	173
	MINI NARROW RIDGE	3/3,4	MINI	0014	76
	EXFEEL	3,5	SMALL	0037	124
		4,1	REGULAR	0037	124
		4,8/5	WIDE	0037	124
	BLUE DIAMOND/BD CUFF/ANYRIDGE OCTA	3,3/3,7	NC	0222	301
		4,1/4,4/4,8/5,3/ 5,8/6,3	RC	0223	303
	MULTI UNIT N TYPE	Multi Unit N Type	UNIVERSAL	0025	103
	MULTI UNIT S TYPE	Multi Unit S Type	UNIVERSAL	0264	330
MICRODENT	MODEL	IMPLANT	PLATFORM	CODE	
	UNIVERSAL	2,8/3,25	3,5	0003	50
		3,3/3,5/3,75/4	4,1	0024	101
		4,2/5	5,1	0058	164
	SYSTEM	2,8/3,25	3,5	0003	50
	EKTOS	3,7/4,2	3,5	0040_B	135

COMPATIBILITIES AVAILABLE

MIS	MODEL	IMPLANT	PLATFORM	CODE	
	LANCE	3.75/4.2	STANDARD	0024	101
		5	WIDE	0058	164
	MULTI-UNIT	-	GENERAL	0020	91
	SEVEN	3.3	NARROW	0019	89
		3.75/4.2	STANDARD	0040	132
		5/6	WIDE	0041	137
	M4	3.3	NARROW	0019	89
		3.75/4.2	STANDARD	0040	132
		5/6	WIDE	0041	137
	C1	3.3	NARROW	0016	82
		3.75/4.2	STANDARD	0017	84
		5	WIDE	0018	87
	V3	3.9/4.3/5	STANDARD	0017	84
MONOIMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	MONOIMPLANT MULTI UNIT	3/3.7/4.1	4.8	0025	103
MOZO-GRAU (TICARE)	MODEL	IMPLANT	PLATFORM	CODE	
	MG OSSEOUS	3.3	3.4 MINI	0003	50
		3.4/3.75/4.25	4.1 STANDARD	0024	101
		5	5 MAXI	0061	170
	MG INHEX	-	CON 45°	0067	
		3.3	2.3 MINI	0109	210
		3.75/4.25	2.8 STANDARD	0004	52
		5	3.8 MAXI	0005	55
MPI	MODEL	IMPLANT	PLATFORM	CODE	
	CONEXIÓN EXTERNA HE PRIVILEGE	3.3	3.5	0009	65
		3.3/4	4.1	0024	101
		5	5	0058	164
	PRIVILEGE CM	3.5/4	REGULAR	0004	52
		5	WIDE	0005	55

COMPATIBILITIES AVAILABLE



MPI	MODEL	IMPLANT	PLATFORM	CODE	
	EXCELLENCE CM	3,5/4	REGULAR	0004	52
		5	WIDE	0005	55
NEOBIOTECH	MODEL	IMPLANT	PLATFORM	CODE	
	EB EXTERNAL SYSTEM	3,5	NARROW	0023	99
	IS IMPLANT SYSTEM	3,2	S-NARROW	0029	112
		3,5	NARROW	0030	115
		4	REGULAR	0030	115
		4,5	REGULAR	0030	115
		5	WIDE	0030	115
		-	4,8	0025	103
NEODENT	MODEL	IMPLANT	PLATFORM	CODE	
	HELIX GM/DRIVE GM/ TITAMAX GM	3,5/3,75/4/ 4,3/5/6	REGULAR	0186	277
	SMART HE	3,75/4	4,1	0024	101
	HELIX HE	3,75/4/4,3	4,1	0024	101
	MINI PILAR CM / MINI PILAR ANGULADO CM	Mini Pilar CM / Mini Pilar Angulado CM	UNIVERSAL	0025	103
NEOSS	MODEL	IMPLANT	PLATFORM	CODE	
	PROACTIVE STRAIGHT/ TAPERED/EDGE	3,25 Royal Blue	3,25	0144	
		3,5 Green	STANDARD	0047	148
		4 Yellow	STANDARD	0047	148
		4,5 Blue	STANDARD	0048	150
		5 Peach	STANDARD	0048	150
		5,5 Lilac	STANDARD	0048	150
	PROACTIVE WIDE	6	STANDARD	0048	150
	PROACTIVE SINUS	6,5	STANDARD	0048	150
	SHORT IMPLANT	3,5/4/4,5	STANDARD	0047	1478
		5/5,5/6/6,5	STANDARD	0048	150

COMPATIBILITIES AVAILABLE

NOBEL BIOCARE	MODEL	IMPLANT	PLATFORM	CODE	
	BRANEMARK	3.3	NARROW	0023	99
		3.75/4	REGULAR	0024	101
		5/6	WIDE	0061	170
	REPLACE	3.5	NARROW	0026	106
		4.3	REGULAR	0027	108
		5	WIDE	0028	110
		6	PLATFORM 6	0129	231
	ACTIVE/REPLACE CONICAL CONNECTION	3	MINI 3.0	0159	248
		3.5	NARROW	0021	93
		4.3/5	REGULAR	0022	96
		5.5	WIDE	0124	2255
	NOBELSPEEDY	3.3	NARROW	0023	99
		4/5	REGULAR	0024	101
		5/6	WIDE	0061	170
NOBEL BIOCARE	MODEL	IMPLANT	PLATFORM	CODE	
	NOBELPARALLEL	3.75	NARROW	0021	93
		4.3/5	REGULAR	0022	96
		5.5	WIDE	0124	225
NORIS MEDICAL	MODEL	IMPLANT	PLATFORM	CODE	
	TUFF	3.3/3.75/4.2/5/6	3.75	0040	132
	TUFF TT	3.3/3.75/4.2/5/6	3.75	0040	132
	ONIX	3.3/3.75/4.2/5/6	3.75	0040	132
	CORTICAL	4.0/5/6	3.75	0040	132
	PTERYCORE	4.2	3.75	0040	132
	PTERYFIT	4.2	3.75	0040	132
NORMON	MODEL	IMPLANT	PLATFORM	CODE	
	NORMOIMPLANT HE	3.25/3.75/4.25/ 4.75	4.1	0024	101
	NORMOIMPLANT HI	3.75/4.25/4.75	3.5	0040_B	135

COMPATIBILITIES AVAILABLE



NOVA IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	PSI/PCI	3.3/3.75/4.2/5/6	3.75	0040_B	135
OSSTEM IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	TS	3	MINI 3.0	0029	112
		3.5	MINI 3.5	0029	112
		4/4.5/5/6/7	REGULAR	0030	115
	US	3.3/3.5	MINI 3.5	0023	99
		3.75/4/4.5	REGULAR 4.1	0024	101
		5/5.5	WIDE 5.1	0061	170
		5/5.5	WIDE PS 5	0058	163
	MULTI UNIT ABUTMENT/ESTHETIC LOW ABUTMENT	Universal	MINI/REGULAR	0025	103
OSTEOPLUS	MODEL	IMPLANT	PLATFORM	CODE	
	SHE	3.45	3.45	0009	65
		3.75 / 4	4	0024	101
	SHI	3.3 / 3.75 / 4.2	3.5	0040	132
OXY	MODEL	IMPLANT	PLATFORM	CODE	
	K1 LINE	3.5/4/4.5/5	REGULAR	0015	79
		5.5/6/6.5	WIDE	0015	79
	PSK LINE	3.5/4/4.5/5	REGULAR	0015	79
	MD LINE KONE	3.75/4.25/5	REGULAR	0015	79
	MD LINE EXT	3.75/4.25	STANDARD	0024	101
	FIXO	Universal	4.8	0242	308
PALTOP	MODEL	IMPLANT	PLATFORM	CODE	
	ADVANCED CLASSIC	3.25	NARROW (BLUE)	0229	305
		3.75/4.2/5	STANDARD	0040_B	135

COMPATIBILITIES AVAILABLE

PALTOP	MODEL	IMPLANT	PLATFORM	CODE	
	ADVANCED CLASSIC	3.75/4.2/5	STANDARD	0042	132
		6	WIDE (PURPLE)	0041	137
	ADVANCED +	3.25	NARROW (BLUE)	0229	305
		3.75/4.2/5	STANDARD	0040_B	135
		3.75/4.2/5	STANDARD	0042	132
		6	WIDE (PURPLE)	0041	137
	DYNAMIC	3.25	NARROW (BLUE)	0229	305
		3.75/4.2/5	STANDARD	0040_B	135
		3.75/4.2/5	STANDARD	0042	132
		6	WIDE (PURPLE)	0041	137
	PAI	3.25	NARROW (BLUE)	0229	305
		3.75/4.2/5	STANDARD	0040_B	135
		3.75/4.2/5	STANDARD	0042	132
		6	WIDE (PURPLE)	0041	137
	DIVA/ACTIVE	3.75/4.2/5	STANDARD	0040_B	135
		3.75/4.2/5	STANDARD	0042	132
	CONICAL ACTIVE	3.25/3.75/4.2/5	STANDARD	0029/0182	112
	UNIVERSAL MULTI-UNIT	Multi-Unit	UNIVERSAL	0181	273
P-I BRANEMARK	MODEL	IMPLANT	PLATFORM	CODE	
	MT	3.3	3.5 (RED)	0178	272
		3.75	4.1 (GREEN)	0178	272
		4.8	5.1 (YELLOW)	0178	272
PHIBO	MODEL	IMPLANT	PLATFORM	CODE	
	TSH/BNT SERIE 3	3.6	4	0024	101
	TSH/BNT SERIE 4	4.2	4	0024	101
POINT IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	SM II SYSTEM UV IMPLANT	4/4.5/5	REGULAR	0030	115

COMPATIBILITIES AVAILABLE



PROCLINIC	MODEL	IMPLANT	PLATFORM	CODE	
	CILINDRICO EXTERNO	3.3	3.3 MINI	0009	65
	CILINDRICO EXTERNO/ CÓNICO EXTERNO	3.75/4.25/3.5/4	4.1 ESTANDAR	0024	101
		5	5 MAXI	0058	164
		3.3/3.75/4.25/5/ 3.5/4/5	3.5	0040	132
	SP OCTA	3.3/4.1/4.8	4.8	0074	173
		3.3/4.1/4.8	4.8	0037	124
		4.8	6.5	0096	203
	AQUA CM	3.5/4/5	2.82	0004	52
PROTEG IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	PR01	3.3/3.75/4.2/5/6	NARROW	0265	331
RADHEX	MODEL	IMPLANT	PLATFORM	CODE	
	PHE	3.5	3.5	0023	99
		4/4.5/5	4.1	0024	101
	PHI	3.75	3.5	0040_B	135
		4.5/5	4.5	0041_B	140
REFLECT	MODEL	IMPLANT	PLATFORM	CODE	
	RAPID	3.0	3.0	0159	248
		3.5	NP	0021	93
		4.3/5/5.5	RP	0022	96
	RECOVER	3.5	NP	0021	93
		4.3/5	RP	0022	96
	ASPIRE	3.5/4	AQUA (ESTRECHA)	0004	51
		5	LILAC (ANCHA)	0005	54
	TAPERED SCREW	3.5	3.5	0040	132
		4.1/4.7	4.5	0041	137

COMPATIBILITIES AVAILABLE



RITTER	MODEL	IMPLANT	PLATFORM	CODE	
	SB/LA/QSI	3,75/4,2/5/6	STANDARD	0040_B	135
ROOTT	MODEL	IMPLANT	PLATFORM	CODE	
	R	3,5/3,8/4,2/ 4,8/5,5	UNIVERSAL	0236	306
SEWON MEDIX	MODEL	IMPLANT	PLATFORM	CODE	
	IH2 SLA SYSTEM	3,5	MINI	0029	112
		3,5/4/4,5/5	REGULAR	0030	115
	IH2 RBM SYSTEM	3,5	MINI	0029	112
		3,5/4/4,5/5	REGULAR	0030	115
	IH SYSTEM	3,5/4/4,5/5	UNIVERSAL	0025	103
SIC INVENT	MODEL	IMPLANT	PLATFORM	CODE	
	HEXAGONAL SYSTEM SICACE	3,4/4	3,3	0170	266
		4,5/5	4,2	0171	268
	HEXAGONAL SYSTEM SICMAX	3,4/4,2	3,3	0170	266
		4,7/5,2	4,2	0171	268
	HEXAGONAL SYSTEM SICTAPERED	3,4/4,2	3,3	0170	266
		4,7/5,2	4,2	0171	268
SIGNO VINCES	MODEL	IMPLANT	PLATFORM	CODE	
	DUO	4,6	4,1	0024	101
	INTEGRA	3,75/4	4,1	0024	101
	COMPACT	4,5	CM3,8	0004	51
	DUOCON	3,8	CM3,8	0004	51
		4,6/5,5	CM4,6	0005	54
	INFRA	3,3/3,8/4,6	CM	0004	51

COMPATIBILITIES AVAILABLE

SIN IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	HE	3,75	4,1	0024	101
	HI SW	3,8	3,8	0039	129
	TRYON	3,25/3,75/4	4,1	0024	101
	TRYON CO	4	4,1	0024	101
	REVOLUTION	3,25/3,75/4	4,1	0024	101
	STYLUS	4	4,1	0024	101
	EPIKUT/EPIKUT PLUS	4,5	4,5	0024	101
		5	5	0058	164
	MINI PILAR	Universal	UNIVERSAL	0025	103
SOUTHERN IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	TRI-NEX	3,5	3,5	0026	106
		4,3	4,3	0027	108
		5	5	0028	110
		6	6	0129	231
	IT CONNECTION	3,3/4/4,1/4,9/5	4,8	0037	124
		4,9/5/6	6,5	0096	203
	EXTERNAL HEX	3,25	3,4	0003	49
		3,75/4	4,1	0024	101
		4,7/5	5	0058	164
		5,7/6	6	0058	164
	DEEP CONICAL	3	2,45	0109	210
		3,5/4	2,95/3,1	0004	52
		5	4,1	0005	55
	INTERNAL HEX	3,75/4,2/5	UNIVERSAL	0040	132
	PROVATA	4/5/6	STANDARD	0040	132
	COMPACT CONICAL	4,8	4,8	0025	103

COMPATIBILITIES AVAILABLE

STERI-OSS	MODEL	IMPLANT	PLATFORM	CODE	
	HEX-LOC	3,25	3,3	0023	99
STERNGOLD	MODEL	IMPLANT	PLATFORM	CODE	
	STERN EX	3,75/4/5	4,1	0024	101
STRAUMANN	MODEL	IMPLANT	PLATFORM	CODE	
	TISSUE LEVEL	3,3	3,5	0160	250
		3,3/4,1/4,8	REGULAR 4,8	0037	124
		4,8	WIDE 6,5	0096	203
	SYNOCTA	-	REGULAR 4,8	0074	173
		-	WIDE 6,5	0137	240
	BONE LEVEL TAPERED SC	2,9	SC- 2,9	0135	236
	BONE LEVEL	3,3	NC- 3,3	0033	118
		4,1	RC-4,1	0035	121
		4,8	RC-4,8	0035	121
	SCREW-RETAINED	NC/RC Ø4,6	UNIVERSAL	0101	205
	BLX	3,5/3,75/4/4,5	RB (REGULAR BASE)	0207	295
		5/5,5/6,5	WB (WIDE BASE)	0208	298
	BLC	3,3/3,75	RB	0207	295
		4,5/5,5/6,5	WB	0208	298
	TLX / TLX S	3,75/4,5	NT	0260	324
		3,75/4,5	RT	0261	326
		5,5/6,5	WT	0262	328
	TLC	3,3	NT	0260	324
		3,3/3,75/4,5	RT	0261	326
		4,5/5,5/6,5	WT	0262	328
SURCAM DENTAL	MODEL	IMPLANT	PLATFORM	CODE	
	MULTI-UNIT	-	UNIVERSAL	0181	273

COMPATIBILITIES AVAILABLE



SYBRON IMPLANT SOLUTIONS	MODEL	IMPLANT	PLATFORM	CODE	
	ENDOPORE (INNOVA)	4,1	4,1	0024	101
SYSTHEX	MODEL	IMPLANT	PLATFORM	CODE	
	CLASSIC-CI / ESTETIC-CI	3,5/3,75/4	4,1	0024	101
TBR	MODEL	IMPLANT	PLATFORM	CODE	
	HEX-CONIC	3,5	NARROW	0023	99
		5	WIDE	0058	164
	CONNECT / INFINITY	3,5	3,5	0266	332
		4	4	0267	333
		5	5	0268	334
	BABY 8	4	4	0267	333
		5	5	0268	334
TITANIUM-FIX	MODEL	IMPLANT	PLATFORM	CODE	
	B-FIX	3,5/4	REGULAR	0004	51
		4,5/5	LARGA	0005	54
TREE-OSS	MODEL	IMPLANT	PLATFORM	CODE	
	SIMPLE	3,3/3,75/5	3,75 AMARILLO	0040	132
	RAPID/ANATOMIC	3,3	3,5 ROSA	0023	99
		3,75/4	4,1 AMARILLO	0024	101
		5	5,1 AZUL	0061	170
	ANATOMIC/HS	3,5	3,5 ROSA	0026	106
		4,3	4,3 AMARILLO	0027	108
		5	5 AZUL	0028	110
	MULTI UNIT	-	UNIVERSAL	0025	103

COMPATIBILITIES AVAILABLE

TRI DENTAL IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	TRI-VENT	3.75/4.1/4.7	3.5	0040	132
		3.75/4.1/4.7	3.5	0042	132
TRINON	MODEL	IMPLANT	PLATFORM	CODE	
	Q2	3.5/3.75/4.5	4	0024	101
	QK	4	4.8	0074	173
		4	4.8	0037	124
UFIT	MODEL	IMPLANT	PLATFORM	CODE	
	GT2	3.5	MINI	0004	51
		4/4.5	REGULAR	0005	54
		5	WIDE	0005	54
		5.5/6/6.5/7	ULTRA-WIDE	0005	54
	NT2	3.5	MINI	0004	51
		4/4.5	REGULAR	0005	54
		5	WIDE	0005	54
		5.5/6/6.5/7	ULTRA-WIDE	0005	54
VULKAN IMPLANTS	MODEL	IMPLANT	PLATFORM	CODE	
	IN-HEX	3.3/3.75/4.2/5	3.75	0040	132
WARANTEC (ONEPLANT)	MODEL	IMPLANT	PLATFORM	CODE	
	IU IMPLANT SYSTEM	3.3/3.6	MINI	0004	51
		3.6	MINI	0004	51
WIN	MODEL	IMPLANT	PLATFORM	CODE	
	WIN	3.30/3.75/4.25/5	3.75	0040_B	135
		Universal	UNIVERSAL	0025	103


COMPATIBILITIES AVAILABLE



XIVE	MODEL	IMPLANT	PLATFORM	CODE	
	XIVE	3	3	0084	186
		3.4	3.4	0038	127
		3.8	3.8	0039	129
		4.5	4.5	0085	188
		5.5	5.5	0086	190
YES IMPLANT	MODEL	IMPLANT	PLATFORM	CODE	
	S-SYSTEM	3.3/3.5	NARROW	0030	115
		4/4.5	REGULAR	0030	115
		5/5.5	WIDE	0030	115
YOUSE IMPLANTS (Sweden & Martina Group)	MODEL	IMPLANT	PLATFORM	CODE	
	YOUSE-V/YOUSE-VL	3.3/3.7	NARROW	0021	93
		4.2/5	REGULAR	0022	96
ZIACOM	MODEL	IMPLANT	PLATFORM	CODE	
	OEX	3.75/4.25	RP 4.1	0024	101
	ZINIC	3.7/4/4.3	RP 3.5	0040_B	135
	ZINIC SHORTY	4.75	RP 3.5	0040_B	135
	GALAXY	3.4/3.7/4	RP 2.85	0004	51
ZIMMER	MODEL	IMPLANT	PLATFORM	CODE	
	SCREW-VENT	3.7/4.1	3.5	0040	132
		3.7/4.1	3.5	0042	132
		4.7	4.5	0041	137
		4.7	4.5	0043	
		6	5.7	0080	178
	TSX IMPLANT	3.1	2.9	0178	272
		3.7/4.1/4.7	3.5	0040	132
		3.7/4.1/4.7	3.5	0042	132

COMPATIBILITIES AVAILABLE

ZIMMER	MODEL	IMPLANT	PLATFORM	CODE	
	TSX IMPLANT	5,4/6	4,5	0041	137
	SWISS-PLUS	3,7/4,1/4,8	4,8	0074	173
		3,7/4,1/4,8	4,8	0037	124
	EZTETIC	3,1	2,9	0178	272
	TAPERED ABUTMENT	Universal	UNIVERSAL	0205	293



This printed version is probably outdated and may not include all products or compatibilities.

Scan and download the latest version of this catalogue

www.dynamicabutment.com


MULTI-UNIT DAS SYSTEM

DYNAMIC DAS SYSTEM

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_1 = Standard maximum angulation α_2 = Standard maximum angulation α_{di} = Direct to implant maximum angulation

COMPATIBLE WITH 0001

LIST OF COMPATIBILITIES **AVAILABLE**
BIOMET 3i

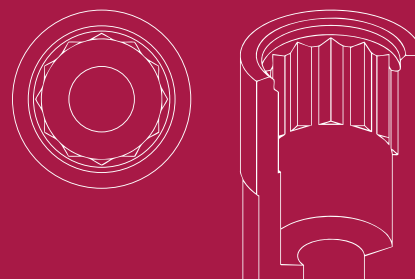

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	43°	29°	31.322.001.01-2	31.312.001.01-2
1,2	25°	22°	31.322.001.02-2	31.312.001.02-2
2	25°	-	31.322.001.03-2	31.312.001.03-2
3	20°	-	31.322.001.04-2	31.312.001.04-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	20°	10°	31.322.001.21-2	31.312.001.21-2
2	25°	20°	10°	-	31.312.001.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.001.01-2	43.621.410.01-2
12	52.412.103.01-2	50.312.001.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.754.01-2	22.612.001.01-2	34.612.001.01-2
4	25°	33.490.754.01-2		
6		33.690.754.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.001.21-2	49.416.000.02-2	13	B	43.601.103.02-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.084.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT


GH (mm)	NON ENGAGING
1	42.302.001.01-2
2	42.302.001.02-2
3	42.302.001.03-2
4	42.302.001.04-2
VIEW COMPONENTS	



COMPATIBLE WITH 0002

LIST OF COMPATIBILITIES AVAILABLE

BIOMET 3i

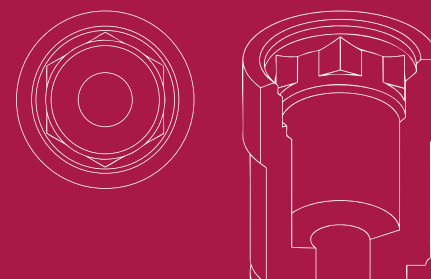

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	29°	31.323.002.01-2	31.313.002.01-2
1,2	25°	22°	31.323.002.02-2	31.313.002.02-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	20°	10°	31.323.002.21-2	31.313.002.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.002.01-2	43.621.410.01-2 43.624.410.01-2
12	52.412.101.01-2		



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3	30°	33.390.805.01-2	22.613.002.01-2	34.613.002.01-2
4		33.490.805.01-2		
6		33.690.805.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.002.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.01-2 41.320.044.01-2 41.320.050.01-2 (IMPLANT DIRECT)	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_d = Standard maximum angulation α_d = Direct to implant maximum angulation


MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.002.01-2
2	42.303.002.02-2
3	42.303.002.03-2
4	42.303.002.04-2
VIEW COMPONENTS	



COMPATIBLE WITH 0003

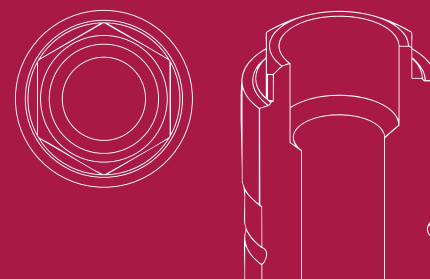

LIST OF COMPATIBILITIES AVAILABLE

BIOMET 3i - BIOLOK - BTK - EASY IMPLANT - MICRODENT - MOZO-GRAU (TICARE) - SOUTHERN IMPLANTS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	30°	31.322.003.01-2	31.312.003.01-2
0,5	25°	30°	31.322.003.02-2	31.312.003.02-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	15°	31.322.003.23-2	31.312.003.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.104.01-2	50.312.003.01-2	43.621.410.01-2
12	52.412.104.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.716.01-2	22.612.003.01-2	34.612.003.01-2
4	25°	33.490.716.01-2		
6		33.690.716.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.003.21-2	49.416.000.02-2	13	B	43.601.103.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.065.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.02-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH 0004

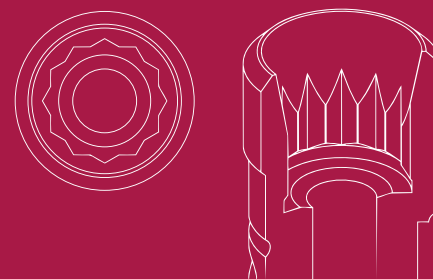

LIST OF COMPATIBILITIES AVAILABLE

ASTRA - CORTEX - EASY IMPLANT - EUROTEKNIKA - GALIMPLANT - IMPLANTSWISS - MOZO-GRAU (TICARE) - MPI - PROCLINIC
REFLECT - SIGNO VINCES - SOUTHERN IMPLANTS - TITANIUM-FIX - UFIT - WARANTEC (ONEPLANT) - ZIACOM

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	45°	29°	31.323.004.01-2	31.313.004.01-2
2	30°	20°	31.323.004.02-2	31.313.004.02-2
3	25°	25°	31.323.004.03-2	31.313.004.03-2
4	20°	25°	31.323.004.04-2	31.313.004.04-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.323.004.21-2	31.313.004.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.313.004.01-2	43.621.410.01-2
12	52.412.103.01-2	50.313.004.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.004.02-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.754.01-2	22.613.004.01-2	34.613.004.01-2
4	25°	33.490.754.01-2		
6		33.690.754.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.004.21-2	49.416.000.02-2	13	B	43.625.105.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.316.076.01-2	41.316.118.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.02-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.004.01-2
2	42.303.004.02-2
3	42.303.004.03-2
4	42.303.004.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2.5/3.9	48.312.004.02-2
3.5/4.9	48.312.004.03-2
4.5/5.9	48.312.004.04-2
VIEW COMPONENTS	



COMPATIBLE WITH 0005

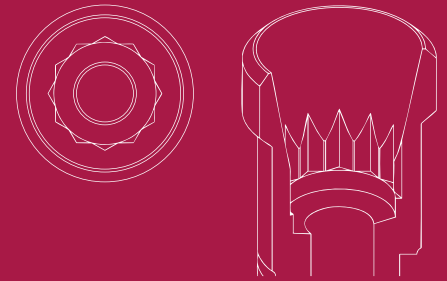

LIST OF COMPATIBILITIES AVAILABLE

ASTRA - BIOGENESIS - CORTEX - GT MEDICAL - MOZO-GRAU (TICARE) - MPI - REFLECT - SIGNO VINCES - SOUTHERN IMPLANTS
TITANIUM-FIX - UFIT

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	38°	23°	31.324.005.01-2	31.314.005.01-2
2	25°	15°	31.324.005.02-2	31.314.005.02-2
3	20°	-	31.324.005.03-2	31.314.005.03-2
4	15°	-	31.324.005.04-2	31.314.005.04-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.324.005.21-2	31.314.005.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.102.01-2	50.314.005.01-2	43.621.410.01-2
12	52.412.102.01-2	50.314.005.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.958.01-2	22.614.005.01-2	34.614.005.01-2
4	30°	33.490.958.01-2		
6		33.690.958.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.005.21-2	49.416.000.02-2	13	B	43.625.105.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.320.090.01-2	41.320.137.01-2	24	43.624.201.01-2
		32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.03-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH 0006

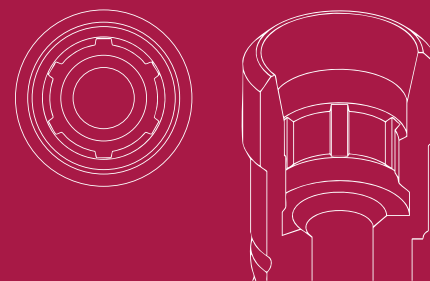

LIST OF COMPATIBILITIES AVAILABLE

ASTRA

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	40°	20°	31.322.006.01-2	31.312.006.01-2
2	25°	12°	31.322.006.02-2	31.312.006.02-2
3	20°	30°	31.322.006.03-2	31.312.006.03-2
4	15°	30°	31.322.006.04-2	31.312.006.04-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,2	30°	20°	15°	31.322.006.21-2	31.312.006.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.006.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.330.734.01-2	22.612.006.01-2	34.612.006.01-2
4	25°	33.430.734.01-2		
6		33.630.734.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.006.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.072.01-2	41.316.115.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_d = Standard maximum angulation α_i = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.006.01-2
2	42.302.006.02-2
3	42.302.006.03-2
4	42.302.006.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°


GH (mm)	ENGAGING
2.5/3.9	48.312.006.02-2
3.5/4.9	48.312.006.03-2
4.5/5.9	48.312.006.04-2
VIEW COMPONENTS	



COMPATIBLE WITH 0007

LIST OF COMPATIBILITIES AVAILABLE

ASTRA

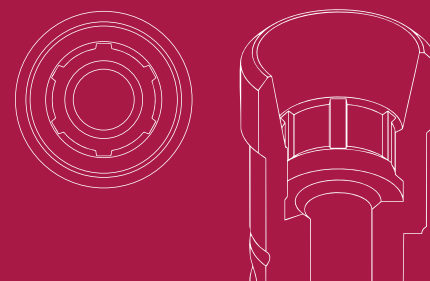

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1.5	38°	17°	31.323.007.01-2	31.313.007.01-2
2	25°	12°	31.323.007.02-2	31.313.007.02-2
3	25°	-	31.323.007.03-2	31.313.007.03-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1.5	25°	20°	10°	31.323.007.21-2	31.313.007.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.007.01-2 50.313.007.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.101.01-2		



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.007.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.350.775.01-2	22.613.007.01-2	34.613.007.01-2
4	25°	33.450.775.01-2		
6		33.650.775.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.007.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.005.02-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.007.01-2
2	42.303.007.02-2
3	42.303.007.03-2
4	42.303.007.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1.5/2.9	48.312.007.01-2
2.5/3.9	48.312.007.02-2
3.5/4.9	48.312.007.03-2
VIEW COMPONENTS	



COMPATIBLE WITH 0008

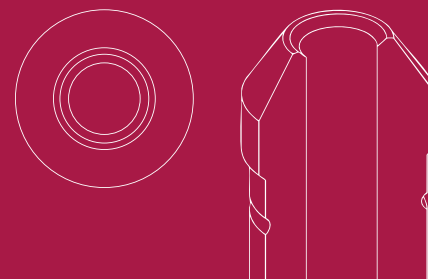

LIST OF COMPATIBILITIES AVAILABLE

ASTRA

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.008.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,5	25°	20°	10°	31.323.008.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.113.01-2	50.313.008.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.413.008.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.370.716.01-2
4	30°	33.470.716.01-2
6		33.670.716.01-2

ANALOG

DIGITAL ANALOG
34.613.008.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation


SCANBODY REFERENCE

SCREWS

COMPATIBLE WITH 0009

LIST OF COMPATIBILITIES AVAILABLE

BTI - MPI - OSTEOPLUS

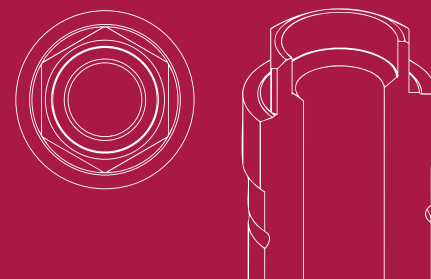

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	25°	31.322.009.01-2	31.312.009.01-2
0,5	25°	25°	31.322.009.02-2	31.312.009.02-2
1	25°	-	31.322.009.03-2	31.312.009.03-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.114.01-2	50.312.009.01-2	43.621.410.01-2
12	52.412.114.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3	25°	33.390.716.01-2	22.612.009.01-2	34.612.009.01-2
4		33.490.716.01-2		
6		33.690.716.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2


STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.01-2	Hex. 1.20	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH OO10

LIST OF COMPATIBILITIES **AVAILABLE**
BTI

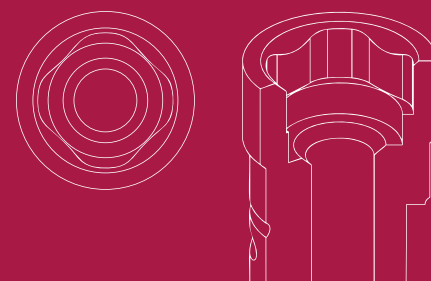

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	29°	31.323.010.01-2	31.313.010.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.115.01-2	50.313.010.01-2	43.621.410.01-2
12	52.412.115.01-2	50.313.010.04-2 (IG=3mm)	43.624.410.012



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.716.01-2	22.613.010.01-2	34.613.010.01-2
4	30°	33.490.716.01-2		
6		33.690.716.01-2		



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.010.01-2
2	42.303.010.02-2
3	42.303.010.03-2
4	42.303.010.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO11

LIST OF COMPATIBILITIES **AVAILABLE**
CAMLOG

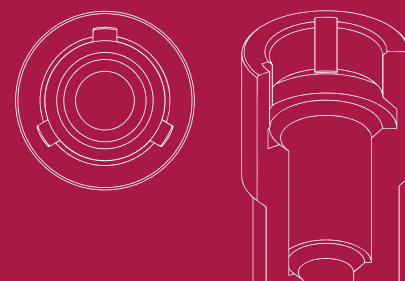

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	25°	29°	31.322.011.01-2	31.312.011.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	25°	15°	-	31.312.011.21-2
2	25°	20°	15°	-	31.312.011.23-2
3	25°	20°	10°	-	31.312.011.24-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.108.01-2	50.312.011.01-2	43.621.410.01-2
12	52.412.108.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.804.01-2	34.612.011.01-2
4	20°	33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
54.315.011.21-2	49.414.000.03-2	6	C	43.625.105.01-2
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.094.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.04-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.011.01-2
2	42.302.011.02-2
3	42.302.011.03-2
VIEW COMPONENTS	



COMPATIBLE WITH OO12

LIST OF COMPATIBILITIES **AVAILABLE**
CAMLOG

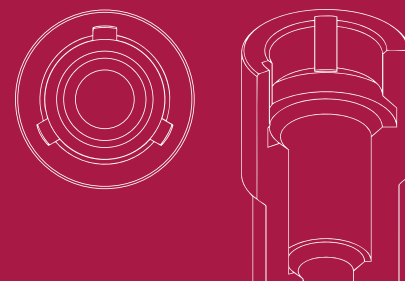

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	25°	30°	31.323.012.01-2	31.313.012.01-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	25°	15°	-	31.313.012.21-2
2	25°	20°	15°	-	31.313.012.23-2
3	25°	20°	10°	-	31.313.012.24-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.109.01-2	50.313.012.01-2	43.621.410.01-2
12	52.412.109.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.804.01-2	34.613.012.01-2
4	20°	33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.012.21-2	49.416.000.02-2	13	B	43.625.105.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.094.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.04-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.012.01-2
2	42.303.012.02-2
3	42.303.012.03-2
VIEW COMPONENTS	



COMPATIBLE WITH OO13

LIST OF COMPATIBILITIES **AVAILABLE**
DIO IMPLANTS

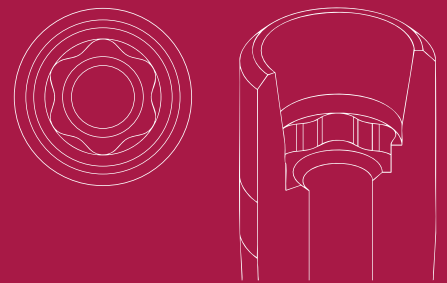

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,7	43°	23°	31.323.013.01-2	31.313.013.01-2
LAB SCANBODY				
30.413.002.01-2				



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.02-2	TORX T6	43.601.107.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH OO14

LIST OF COMPATIBILITIES AVAILABLE

DENTIS - DIO IMPLANTS - MEGAGEN

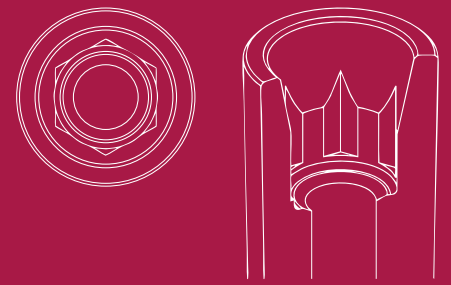

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	41°	23°	31.322.014.01-2	31.312.014.01-2
2	25°	17°	31.322.014.02-2	31.312.014.02-2
3	20°	25°	-	31.312.014.03-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
3	25°	20°	15°	31.322.014.23-2	31.312.014.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.128.01-2	50.312.014.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.014.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.804.01-2	34.612.014.01-2
4	25°	33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.014.21-2	49.416.000.02-2	13	B	43.601.103.02-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.314.067.01-2	41.314.105.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.003.04-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
2	42.302.014.02-2
3	42.302.014.03-2
4	42.302.014.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°


GH (mm)	ENGAGING
3.5/4.9	48.312.014.03-2
4.5/5.9	48.312.014.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO15

LIST OF COMPATIBILITIES AVAILABLE

OXY - JDENTALCARE - MEGAGEN

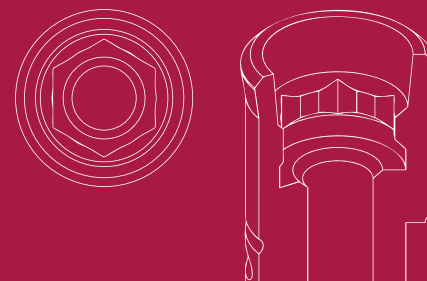

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,7	43°	23°	31.323.015.01-2	31.313.015.01-2
2,5	25°	15°	31.323.015.02-2	31.313.015.02-2
3	25°	-	31.323.015.03-2	31.313.015.03-2
4	20°	-	31.323.015.04-2	31.313.015.04-2
5	15°	-	31.323.015.05-2	31.313.015.05-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	20°	31.323.015.27-2	31.313.015.27-2
1,7	30°	25°	10°	31.323.015.21-2	31.313.015.21-2
2,5	25°	20°	10°	31.323.015.22-2	31.313.015.22-2
3,5	25°	20°	10°	-	31.313.015.26-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.104.01-2	50.313.015.01-2	43.621.410.01-2
12	52.412.104.01-2	50.313.015.03-2 (IG=3mm)	43.624.410.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.015.01-2



DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.805.01-2	34.613.015.01-2
4	25°	33.490.805.01-2	
6		33.690.805.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.015.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.075.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.02-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.015.01-2
2	42.303.015.02-2
3	42.303.015.03-2
4	42.303.015.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.015.01-2
2,5/3,9	48.312.015.02-2
4,5/5,9	48.312.015.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.015.02-2
3	62.303.015.03-2
4	62.303.015.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO16

LIST OF COMPATIBILITIES **AVAILABLE**
MIS

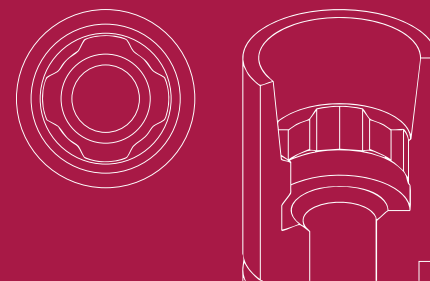

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,8	45°	28°	31.322.016.01-2	31.312.016.01-2
1,5	25°	25°	31.322.016.02-2	31.312.016.02-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,5	25°	25°	15°	-	31.312.016.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.106.01-2		
10	52.410.106.01-2	50.312.016.01-2 50.312.016.04-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.106.01-2		



LAB SCANBODY

30.412.001.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.360.754.01-2	34.612.016.01-2
4	25°	33.460.754.01-2	
6		33.660.754.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.016.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.05-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
1	42.302.016.01-2
2	42.302.016.02-2
3	42.302.016.03-2
4	42.302.016.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
2,5/3,9	48.312.016.02-2
3,5/4,9	48.312.016.03-2
VIEW COMPONENTS	



COMPATIBLE WITH OO17

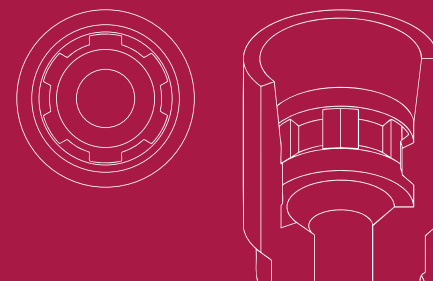

LIST OF COMPATIBILITIES AVAILABLE MIS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,7	45°	24°	31.323.017.01-2	31.313.017.01-2
1,5	25°	15°	31.323.017.02-2	31.313.017.02-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,7	30°	25°	15°	31.323.017.21-2	31.313.017.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.017.04-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.101.01-2		



LAB SCANBODY

30.413.002.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.360.756.01-2	34.613.017.01-2
4	30°	33.460.756.01-2	
6		33.660.756.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.017.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.073.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2

STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.005.01-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
2	42.303.017.02-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
2,5/3,9	48.312.017.02-2
3,5/4,9	48.312.017.03-2
VIEW COMPONENTS	



COMPATIBLE WITH OO18

LIST OF COMPATIBILITIES **AVAILABLE**
MIS

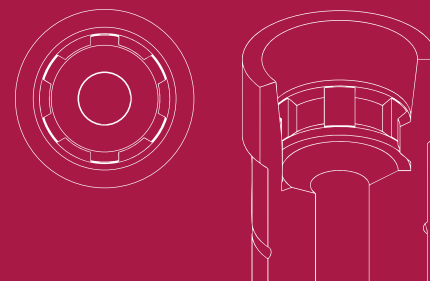


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	39°	18°	31.324.018.01-2	31.314.018.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2	50.314.018.01-2	43.621.410.01-2
12	52.412.102.01-2		43.624.410.01-2




LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.360.756.01-2	34.614.018.01-2
4		33.460.756.01-2	
6		33.660.756.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.073.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH OO19

LIST OF COMPATIBILITIES **AVAILABLE**
MIS

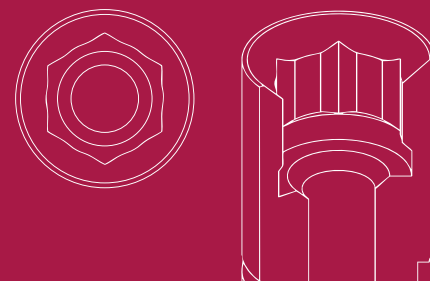


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,8	45°	30°	31.322.019.01-2	31.312.019.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.019.01-2	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.360.754.01-2	34.612.019.01-2
4		33.460.754.01-2	
6		33.660.754.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.05-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
1	42.302.019.01-2
VIEW COMPONENTS	



COMPATIBLE WITH OO20

LIST OF COMPATIBILITIES **AVAILABLE**
MIS

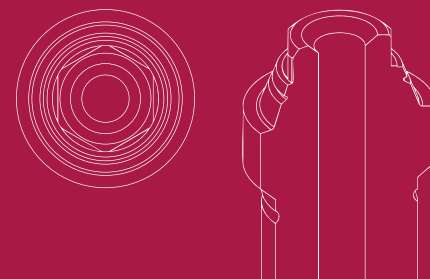

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.020.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.020.01-2	43.620.411.01-2



LAB SCANBODY

30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.613.020.01-2
4	30°	33.490.716.01-2	
6		33.690.716.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.020.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	




SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.044.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.06-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH OO21

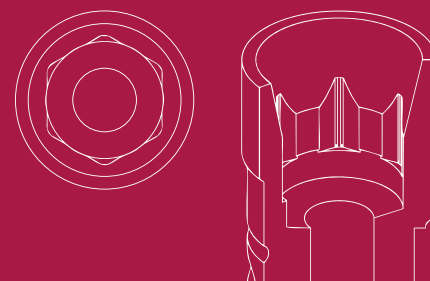

LIST OF COMPATIBILITIES AVAILABLE

ADIN - ALFA-GATE - BIONER - CONEXÃO SISTEMA DE PRÓTESE - HAHN IMPLANT (GLIDEWELL) - HI-TEC IMPLANT DIRECT - NOBEL BIO CARE - REFLECT - YOUSE IMPLANTS (SWEDEN & MARTINA GROUP)

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	43°	24°	31.322.021.01-2	31.312.021.01-2
2	25°	20°	31.322.021.02-2	31.312.021.02-2
3	20°	30°	31.322.021.03-2	31.312.021.03-2
4	15°	30°	31.322.021.04-2	31.312.021.04-2
5	15°	20°	31.322.021.05-2	31.312.021.05-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,5	25°	20°	10°	31.322.021.21-2	31.312.021.21-2
3	25°	20°	15°	31.322.021.23-2	31.312.021.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.021.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.021.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.335.754.01-2	22.612.021.01-2	34.612.021.01-2
4	25°	33.435.754.01-2		
6		33.635.754.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.021.21-2	49.416.000.02-2	13	B	43.625.108.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.316.073.01-2	41.316.108.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.008.02-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.021.01-2
2	42.302.021.02-2
3	42.302.021.03-2
4	42.302.021.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
1,5/2,9	48.312.021.01-2
2,5/3,9	48.312.021.02-2
4,5/5,9	48.312.021.04-2
VIEW COMPONENTS	

ANGULATED MULTI-UNIT 28°

GH (mm)	NON ENGAGING
3,5/5,4	48.612.021.03-2
4,5/6,4	48.612.021.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.302.021.02-2
3	62.302.021.03-2
4	62.302.021.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO22

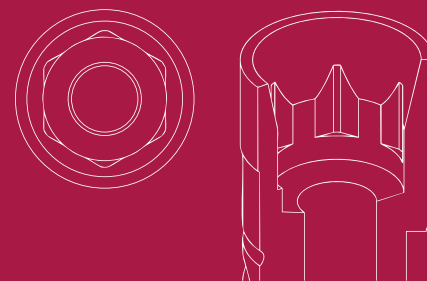

LIST OF COMPATIBILITIES AVAILABLE

ADIN - ALFA-GATE - HAHN IMPLANT (GLIDEWELL) - HI-TEC - IMPLANT DIRECT - JDENTALCARE - NOBEL BIOCARE
REFLECT - YOUSE IMPLANTS (SWEDEN & MARTINA GROUP)

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,3	40°	19°	31.323.022.01-2	31.313.022.01-2
2	25°	14°	31.323.022.02-2	31.313.022.02-2
3	20°	30°	31.323.022.03-2	31.313.022.03-2
4	15°	30°	31.323.022.04-2	31.313.022.04-2
5	15°	20°	31.323.022.05-2	31.313.022.05-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,3	30°	25°	10°	31.323.022.21-2	31.313.022.21-2
3	20°	20°	10°	31.323.022.23-2	31.313.022.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.022.01-2 50.313.022.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.101.01-2		



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.022.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.335.758.01-2	22.613.022.01-2	34.613.022.01-2
4	30°	33.435.758.01-2		
6		33.635.758.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.022.21-2	49.416.000.02-2	13	B	43.625.108.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.320.075.01-2	41.320.117.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.02-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.022.01-2
2	42.303.022.02-2
3	42.303.022.03-2
4	42.303.022.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
1,5/2,9	48.312.022.01-2
2,5/3,9	48.312.022.02-2
VIEW COMPONENTS	

ANGULATED MULTI-UNIT 28°

GH (mm)	NON ENGAGING
3,5/5,4	48.612.022.03-2
4,5/6,4	48.612.022.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.022.02-2
3	62.303.022.03-2
4	62.303.022.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO23

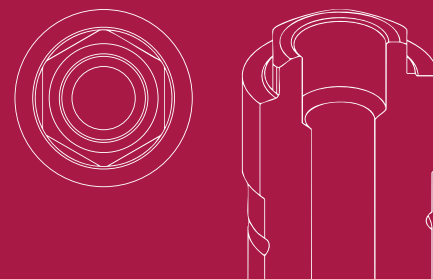

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - AVINENT - BIOGENESIS - BIOHORIZONS - DENTIS - DIO IMPLANTS - ELITE MEDICA - GT MEDICAL - KLOCKNER
MEGAGEN - NEOBIOTECH - NOBEL BIO CARE - OSSTEM IMPLANT - RADHEX - STERI-OSS - TBR - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	30°	31.322.023.01-2	31.312.023.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.103.01-2	50.312.023.01-2	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.023.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3	25°	33.390.805.01-2	22.612.023.01-2	34.612.023.01-2
4		33.490.805.01-2		
6		33.690.805.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.059.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.008.01-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH OO24

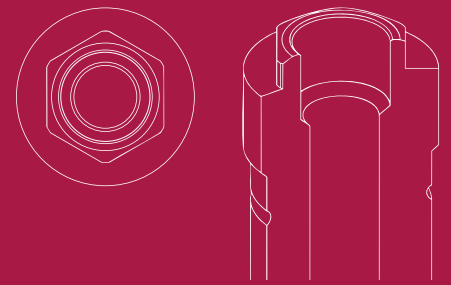

LIST OF COMPATIBILITIES AVAILABLE

ACE - ANTHOGRYR - AVINENT - B&W - BIOMET 3i - BIONER - BTI - BTK - DENTIS - DIO IMPLANTS - EASY IMPLANT - ECKERMANN - ELITE MEDICA - DSP
BIOMEDICAL - EUROTEKNIKA - GALIMPLANT - GMI (ILIRIMPLANT) - GT MEDICAL - INTRA-LOCK - KEYSTONE - KLOCKNER - LEADER - MEGAGEN - MICRODENT
MIS - MOZO-GRAU (TICARE) - MPI - NEODENT - NOBEL BIO CARE - NORMON - OSSTEM IMPLANT - OSTEOPLUS - OXY - PHIBO - PROCLINIC - RADHEX
SIGNO VINCES - SIN IMPLANTS - SOUTHERN IMPLANTS SOLUTIONS - STERNGOLD - SYBRON IMPLANT SOLUTIONS - SYTHEX - TREE-OSS - TRINON - ZIACOM

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.024.01-2	31.313.024.01-2
0,5	30°	30°	31.323.024.02-2	31.313.024.02-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	10°	31.323.024.21-2	31.313.024.21-2
0,5	30°	25°	10°	31.323.024.22-2	31.313.024.22-2
1	30°	25°	10°	31.323.024.23-2	31.313.024.23-2
2	30°	25°	10°	31.323.024.24-2	31.313.024.24-2
3	25°	20°	15°	31.323.024.25-2	31.313.024.25-2
4	25°	20°	15°	31.323.024.26-2	31.313.024.26-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.024.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.390.716.01-2
4	30°	33.490.716.01-2
6		33.690.716.01-2

ANALOG

ANALOG	DIGITAL ANALOG
--------	-------------------

22.613.024.01-2 34.613.024.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.024.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.060.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.01-2	UNIGRIP	43.625.108.01-2




MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
2	42.303.024.02-2
3	42.303.024.03-2
VIEW COMPONENTS	



COMPATIBLE WITH OO25

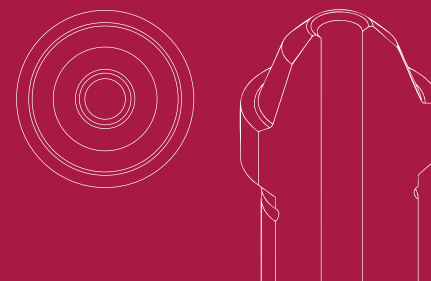

LIST OF COMPATIBILITIES AVAILABLE

AB - ACE - ADIN - AVINENT - BIOHORIZONS - BIOMET 3i - BIONER - CORTEX - DENTIS - EASY IMPLANT - EUROTEKNIKA - GALIMPLANT - GMI (ILERIMPLANT) - HAHN IMPLANT (GLIDEWELL) - IMPLANTSWISS - JDENTALCARE - MEDENTIS - MEDENTIKA - MEGAGEN - MONOIMPLANT - NEOBIOTECH - NEODENT - NOBEL BIO CARE - OSSTEM IMPLANT - SEWON MEDIX - SIN IMPLANTS - SOUTHERN IMPLANTS - TREE-OSS - WIN

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.025.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	10°	31.323.025.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.025.02-2	43.620.411.01-2 43.621.410.01-2
10	52.410.111.01-2	50.313.025.01-2	43.624.410.01-2



LAB SCANBODY	MINI SCANBODY	SCANALOG
30.413.005.01-2	53.413.025.01-2	23.413.025.01-2 23.313.025.01-2 (Titanium)



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.716.01-2	22.613.025.01-2	34.613.025.01-2
4	30°	33.490.716.01-2		
6		33.690.716.01-2		



SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
54.322.025.31-2	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	DYNAMIC SCREW Ø2,6	LENGTH	SCREWDRIVER
41.314.039.01-2	41.314.050.31-2 (Temporary or Zirconio Direct MU)	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.01-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH OO26

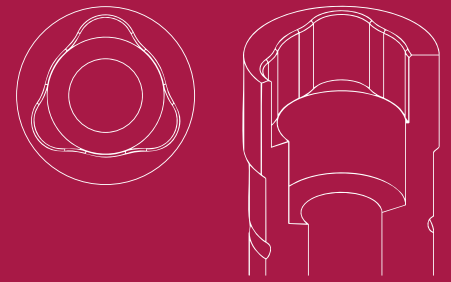

LIST OF COMPATIBILITIES AVAILABLE

ACE - IMPLANT DIRECT - NOBEL BIO CARE - SOUTHERN IMPLANTS - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	29°	31.322.026.01-2	31.312.026.01-2
1,2	25°	22°	31.322.026.02-2	31.312.026.02-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,5	25°	20°	10°	31.322.026.21-2	31.312.026.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.108.01-2	50.312.026.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.108.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.805.01-2	22.612.026.01-2	34.612.026.01-2
4	25°	33.490.805.01-2		
6		33.690.805.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.026.21-2	49.416.000.02-2	13	B	43.625.108.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.075.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.008.01-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_d = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH OO27

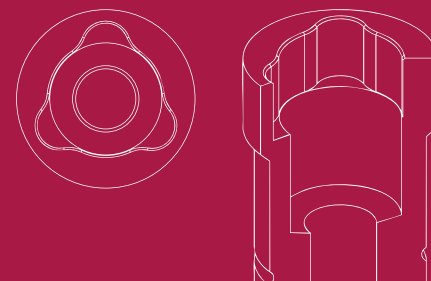

LIST OF COMPATIBILITIES AVAILABLE

ACE - IMPLANT DIRECT - NOBEL BIO CARE - SOUTHERN IMPLANTS - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	35°	29°	31.323.027.01-2	31.313.027.01-2
1,2	25°	22°	31.323.027.02-2	31.313.027.02-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	25°	20°	10°	31.323.027.21-2	31.313.027.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.109.01-2	50.313.027.01-2	43.621.410.01-2
12	52.412.109.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.958.01-2	22.613.027.01-2	34.613.027.01-2
4	30°	33.490.958.01-2		
6		33.690.958.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.027.21-2	49.416.000.02-2	13	B	43.625.108.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.090.01-2	24	43.624.201.01-2
	32	43.632.201.01-2

STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.03-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_d = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH OO28

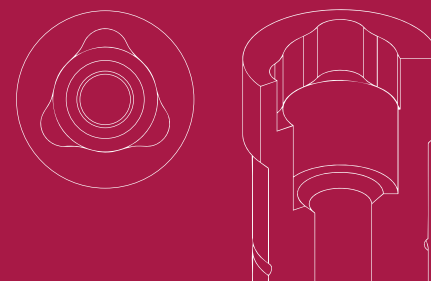

LIST OF COMPATIBILITIES AVAILABLE

ACE - IMPLANT DIRECT - NOBEL BIO CARE - SOUTHERN IMPLANTS - TREE-OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	35°	30°	31.324.028.01-2	31.314.028.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.109.01-2	50.314.028.01-2	43.621.410.01-2
12	52.412.109.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3	30°	33.390.958.01-2	22.614.028.01-2	34.614.028.01-2
4		33.490.958.01-2		
6		33.690.958.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.028.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.090.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.03-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH OO29

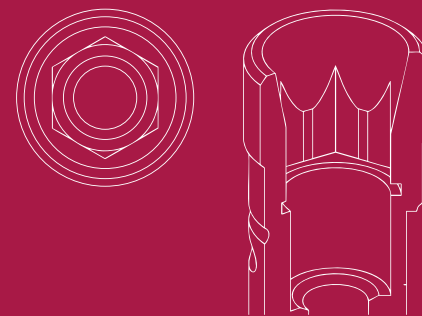

LIST OF COMPATIBILITIES AVAILABLE

BIOCONCEPT - BTK - HIOSSEN - NEOBIOTECH - OSSTEM IMPLANT - SEWON MEDIX

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	30°	23°	31.322.029.01-2	31.312.029.01-2
2	25°	15°	31.322.029.02-2	31.312.029.02-2
3	20°	25°	31.322.029.03-2	31.312.029.03-2
4	15°	25°	31.322.029.04-2	31.312.029.04-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,2	25°	20°	20°	31.322.029.21-2	31.312.029.21-2
2	25°	20°	15°	-	31.312.029.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.103.01-2	50.312.029.01-2	43.621.410.01-2
12	52.412.103.01-2	50.312.029.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.029.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.345.804.01-2	34.613.029.01-2
4		33.445.804.01-2	
6		33.645.804.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.029.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.316.094.01-2	41.316.132.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.02-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.029.01-2
2	42.302.029.02-2
3	42.302.029.03-2
4	42.302.029.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
2,5/3,9	48.312.029.02-2
3,5/4,9	48.312.029.03-2
4,5/5,9	48.312.029.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.302.029.02-2
4	62.302.029.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO30

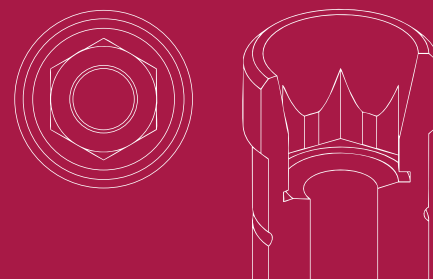

LIST OF COMPATIBILITIES AVAILABLE

BIOCONCEPT - BIOTEM - COWELLMEDI - DENTEM - DENTIS - DENTIUM - DIO IMPLANTS - EASY IMPLANT
F&B IMPLANT (FIT & BRILLIANT) - HIOSSEN - IBS - IDO IMPLANTS - IMPLANTSWISS - KUWOTECH - MEGAGEN
NEOBIOTECH - OSSTEM IMPLANT - POINT IMPLANT - SEWON MEDIX - STARK IMPLANTS - YES IMPLANT

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,1	42°	25°	31.323.030.01-2	31.313.030.01-2
2	25°	15°	31.323.030.02-2	31.313.030.02-2
3	20°	30°	31.323.030.03-2	31.313.030.03-2
4	15°	30°	31.323.030.04-2	31.313.030.04-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,1	25°	20°	10°	31.323.030.21-2	31.313.030.21-2
2	25°	20°	15°	31.323.030.22-2	31.313.030.22-2
3	25°	20°	10°	31.323.030.23-2	31.313.030.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.030.01-2 50.313.030.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.101.01-2		



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.030.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.808.01-2	34.613.030.01-2
4	30°	33.445.808.01-2	
6		33.645.808.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.030.21-2	49.416.000.02-2	13	B	43.601.103.02-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.320.079.01-2	41.320.125.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.04-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.030.01-2
2	42.303.030.02-2
3	42.303.030.03-2
4	42.303.030.04-2
5	42.303.030.05-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.030.01-2
2,5/3,9	48.312.030.02-2
3,5/4,9	48.312.030.03-2
4,5/5,9	48.312.030.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.030.02-2
3	62.303.030.03-2
4	62.303.030.04-2
VIEW COMPONENTS	



COMPATIBLE WITH 0033

LIST OF COMPATIBILITIES **AVAILABLE**
BIOCONCEPT - IHDE DENTAL (IMBIODENT) - STRAUMANN

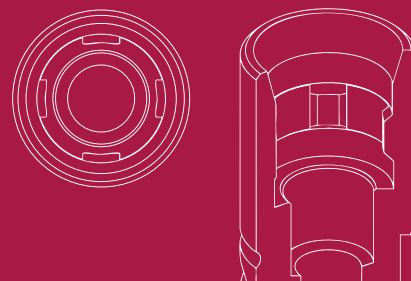

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,3	38°	18°	31.322.033.01-2	31.312.033.01-2
2	20°	14°	31.322.033.02-2	31.312.033.02-2
3	15°	25°	31.322.033.03-2	31.312.033.03-2
4	15°	25°	31.322.033.04-2	31.312.033.04-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,3	25°	20°	10°	31.322.033.21-2	31.312.033.21-2
3	20°	15°	10°	31.322.033.23-2	31.312.033.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
8	52.408.106.01-2		
10	52.410.106.01-2	50.312.033.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.106.01-2		



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.033.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.315.804.01-2	22.612.033.01-2	34.612.033.01-2
4	25°	33.415.804.01-2		
6		33.615.804.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.033.21-2	49.416.000.02-2	13	B	43.601.107.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.316.078.01-2	41.316.124.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.033.01-2
2	42.302.033.02-2
3	42.302.033.03-2
4	42.302.033.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2,5/3,9	48.312.033.02-2
3,5/4,9	48.312.033.03-2
4,5/5,9	48.312.033.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
4	62.302.033.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO35

LIST OF COMPATIBILITIES **AVAILABLE**
BIOCONCEPT - IHDE DENTAL (IMBIODENT) - STRAUMANN

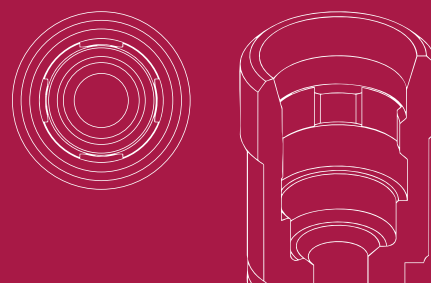

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,1	39°	18°	31.323.035.01-2	31.313.035.01-2
2	20°	14°	31.323.035.02-2	31.313.035.02-2
3	15°	30°	31.323.035.03-2	31.313.035.03-2
4	15°	30°	31.323.035.04-2	31.313.035.04-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=5mm	α_s CH=5mm	NON ENGAGING	ENGAGING
1,1	25°	20°	10°	31.323.035.21-2	31.313.035.21-2
3	20°	15°	10°	31.323.035.23-2	31.313.035.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.107.01-2	50.313.035.01-2	43.621.410.01-2
12	52.412.107.01-2	50.313.035.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.035.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.315.804.01-2	22.613.035.01-2	34.613.035.01-2
4	25°	33.415.804.01-2		
6		33.615.804.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.035.21-2	49.416.000.02-2	13	B	43.601.107.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.316.078.01-2	41.316.124.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.035.01-2
2	42.303.035.02-2
3	42.303.035.03-2
4	42.303.035.04-2

VIEW COMPONENTS




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2.5/3.9	48.312.035.02-2
3.5/4.9	48.312.035.03-2

VIEW COMPONENTS



COMPATIBLE WITH OO37

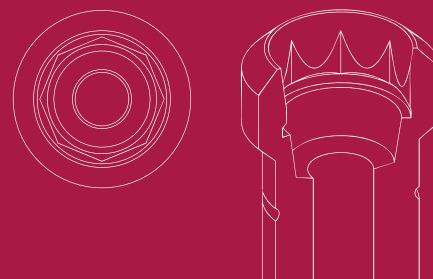

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - ANTHOGRY - BIOCONCEPT - BIOGENESIS - DENTIS - DENTIUM - EUROTEKNIKA - GT MEDICAL - IMPLANT DIRECT
MEGAGEN - PROCLINIC - SOUTHERN IMPLANTS - STRAUMANN - TRINON - ZIMMER


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	25°	31.323.037.01-2	31.313.037.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	15°	31.323.037.21-2	31.313.037.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.110.01-2		
10	52.410.110.01-2	50.313.037.04-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.110.01-2		



LAB SCANBODY	SCANALOG
30.413.004.01-2	23.413.037.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.315.708.01-2	22.613.037.01-2	34.613.037.01-2
4	30°	33.415.708.01-2		
6		33.615.708.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.037.21-2	49.416.000.02-2	13	B	43.601.107.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.067.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.037.01-2
VIEW COMPONENTS	



COMPATIBLE WITH OO38

LIST OF COMPATIBILITIES **AVAILABLE**
XIVE

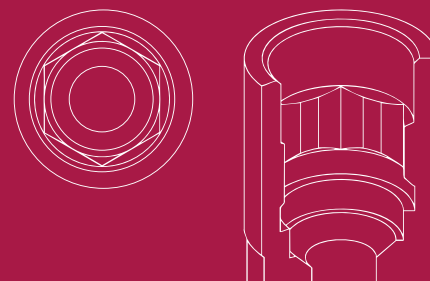

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,7	45°	29°	31.322.038.01-2	31.312.038.01-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,7	30°	25°	10°	31.322.038.21-2	31.312.038.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.312.038.01-2	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.345.804.01-2
4		33.445.804.01-2
6		33.645.804.01-2

ANALOG

DIGITAL ANALOG
34.612.038.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.038.21-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.02-2	Hex. 1.25	43.601.104.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH OO39

LIST OF COMPATIBILITIES **AVAILABLE**
SIN IMPLANTS - XIVE

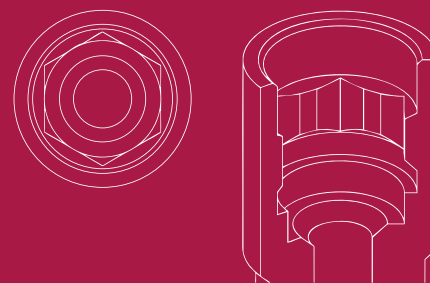

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,7	45°	29°	31.323.039.01-2	31.313.039.01-2
2	25°	-	31.323.039.03-2	31.313.039.03-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,7	30°	25°	10°	31.323.039.21-2	31.313.039.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.114.01-2	50.313.039.01-2	43.621.410.01-2
12	52.412.114.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.856.01-2	34.613.039.01-2
4	25°	33.445.856.01-2	
6		33.645.856.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.039.21-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.02-2	Hex. 1.25	43.601.104.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation


MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.039.01-2
VIEW COMPONENTS	



COMPATIBLE WITH OO4O

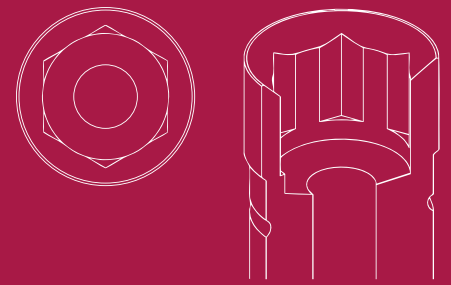

LIST OF COMPATIBILITIES AVAILABLE

AB - ACE - ADIN - ALFA-GATE - ALPHABIO - ANCLADEN - ARDS - BIOHORIZONS - BIONER - BIOTEC - BTK - B&W - CORTEX - DITRON
DMI DENTAL SUPPLY - HI-TEC - IMPLANT DIRECT - IMPLANT GENESIS - INTRA-LOCK - JDENTALCARE - LEADER - MIS - NORIS MEDICAL
OSTEOPLUS - PROCLINIC - REFLECT - SOUTHERN IMPLANTS - TREE-OSS - TRI DENTAL IMPLANTS - VULKAN IMPLANTS - ZIMMER

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.322.040.01-2	31.312.040.01-2 31.312.042.01-2 (Friction Fit)
1,5	25°	25°	31.322.040.02-2	31.312.040.02-2
3	20°	30°	31.322.040.03-2	31.312.040.03-2
4	15°	30°	31.322.040.04-2	31.312.040.04-2
5	10°	23°	31.322.040.05-2	31.312.040.05-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	31.322.040.21-2	31.312.040.21-2
1	30°	25°	20°	31.322.040.29-2	31.312.040.29-2
2	25°	20°	15°	-	31.312.040.28-2
3	25°	20°	15°	31.322.040.23-2	31.312.040.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.312.040.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2
12	52.412.101.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.040.01-2



DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.370.716.01-2	22.612.040.01-2	34.612.040.01-2
4	25°	33.470.716.01-2		
6		33.670.716.01-2		



SCANBODY OP

SCANBODY	PEEK	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
54.315.040.21-2	49.414.000.03-2	6	C	43.625.105.01-2
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.317.071.01-2	41.317.106.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.004.01-2	Hex. 1.27	43.601.104.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.040.01-2
2	42.302.040.02-2
3	42.302.040.03-2
4	42.302.040.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2.5/3.9	48.312.040.02-2
3.5/4.9	48.312.040.03-2
4.5/5.9	48.312.040.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	NON ENGAGING
4	62.302.040.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO4OB

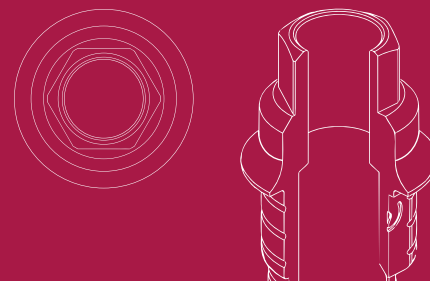

LIST OF COMPATIBILITIES AVAILABLE

AVINENT - ECKERMANN - GMI (ILERIMPLANT) - MICRODENT - NORMON - NOVA IMPLANTS - PALTOP - RADHEX - RITTER WIN - ZIACOM

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.322.040.01-2	31.312.040.01-2 31.312.042.01-2 (Friction Fit)
1,5	25°	25°	31.322.040.02-2	31.312.040.02-2
3	20°	30°	31.322.040.03-2	31.312.040.03-2
4	15°	30°	31.322.040.04-2	31.312.040.04-2
5	10°	23°	31.322.040.05-2	31.312.040.05-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	31.322.040.21-2	31.312.040.21-2
1	30°	25°	20°	31.322.040.29-2	31.312.040.29-2
2	25°	20°	15°	-	31.312.040.28-2
3	25°	20°	15°	31.322.040.23-2	31.312.040.23-2



LAB SCANBODY

30.412.001.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH OO41

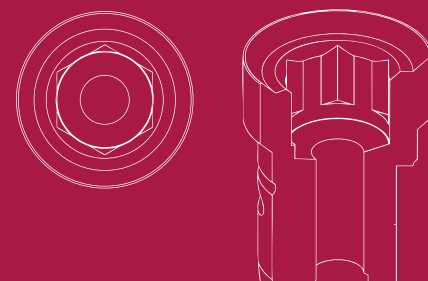

LIST OF COMPATIBILITIES AVAILABLE

ACE - BIOHORIZONS - BIONER - DENTAL TECH - HI-TEC - IMPLANT DIRECT - INTRA-LOCK - MISS - PALTOP - REFLECT ZIMMER

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,4	45°	30°	31.323.041.01-2	31.323.041.02-2 31.313.043.01-2 (Friction Fit)
1,5	30°	25°	31.323.041.02-2	31.313.041.02-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,4	30°	20°	10°	31.323.041.21-2	31.313.041.21-2
1,5	30°	25°	15°	31.323.041.22-2	31.313.041.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2	50.313.041.01-2	43.621.410.01-2
12	52.412.102.01-2	50.313.041.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.002.01-2	23.413.041.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.370.716.01-2	22.613.041.01-2	34.613.041.01-2
4	30°	33.470.716.01-2		
6		33.670.716.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.041.21-2	49.416.000.02-2	13	B	43.625.105.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.317.071.01-2	41.317.106.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.004.01-2	Hex. 1.27	43.601.104.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation


MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.041.01-2
VIEW COMPONENTS	



COMPATIBLE WITH OO41B

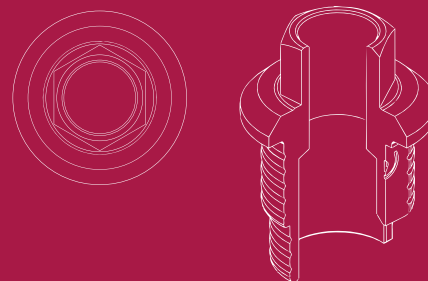

LIST OF COMPATIBILITIES AVAILABLE

ECKERMANN - DENTEGRISS - GMI (ILERIMPLANT) - RADHEX

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,4	45°	30°	31.323.041.01-2	31.313.041.01-2
1,5	30°	25°	31.323.041.02-2	31.313.041.02-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,4	30°	20°	10°	31.323.041.21-2	31.313.041.21-2
1,5	30°	25°	15°	31.323.041.22-2	31.313.041.22-2



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.370.716.01-2
4	30°	33.470.716.01-2
6		33.670.716.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation


SCREWS

DYNAMIC SCREW	LENTH	SCREWDRIVER
41.318.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH OO44

LIST OF COMPATIBILITIES **AVAILABLE**
KEYSTONE

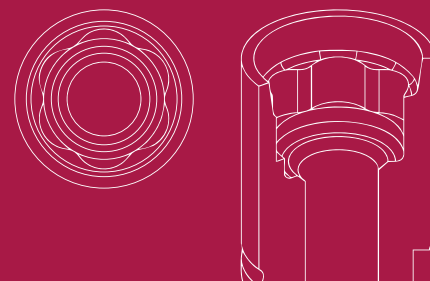

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	42°	23°	31.322.044.01-2	31.312.044.01-2
2	25°	-	31.322.044.02-2	31.312.044.02-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.322.044.21-2	31.312.044.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.105.01-2	50.312.044.01-2	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.612.044.01-2
4	25°	33.490.716.01-2	
6		33.690.716.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



COMPATIBLE WITH OO45

LIST OF COMPATIBILITIES **AVAILABLE**
KEYSTONE

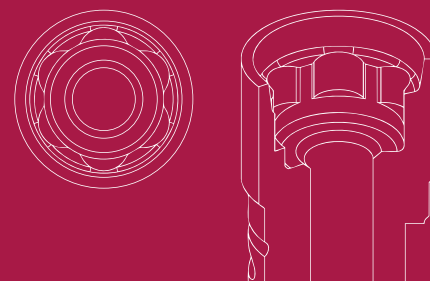

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	43°	22°	31.323.045.01-2	31.313.045.01-2
2	25°	-	31.323.045.02-2	31.313.045.02-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	25°	20°	10°	31.323.045.21-2	31.313.045.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.118.01-2	50.313.045.01-2	43.621.410.01-2
12	52.412.118.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.390.716.01-2	34.613.045.01-2
4		33.490.716.01-2	
6		33.690.716.01-2	




SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



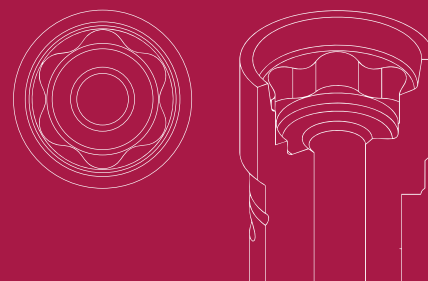

COMPATIBLE WITH OO46

LIST OF COMPATIBILITIES **AVAILABLE**
KEYSTONE

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	42°	21°	31.324.046.01-2	31.314.046.01-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	30°	20°	10°	31.324.046.21-2	31.314.046.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.125.01-2	50.314.046.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.614.046.01-2
4	30°	33.490.716.01-2	
6		33.690.716.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



COMPATIBLE WITH OO47

LIST OF COMPATIBILITIES **AVAILABLE**
NEOSS

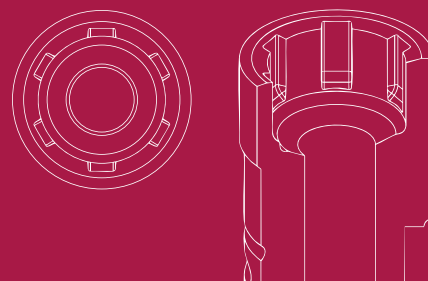

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.322.047.01-2	31.312.047.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	-	31.312.047.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.123.01-2		
10	52.410.123.01-2	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2
12	52.412.123.01-2		



LAB SCANBODY

30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.612.047.01-2
4	25°	33.490.716.01-2	
6		33.690.716.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.047.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.02-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH OO48

LIST OF COMPATIBILITIES **AVAILABLE**
NEOSS

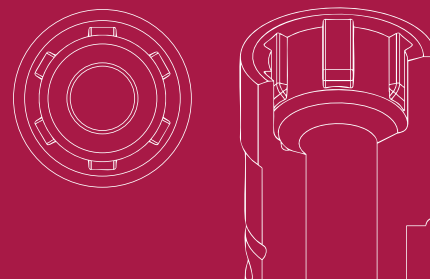

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.048.01-2	31.313.048.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,6	30°	25°	20°	31.323.048.21-2	31.313.048.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.123.01-2		
10	52.410.123.01-2	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2
12	52.412.123.01-2		



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.390.716.01-2	34.612.047.01-2
4		33.490.716.01-2	
6		33.690.716.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.02-2	TORX T6	43.601.107.01-2



COMPATIBLE WITH OO49

LIST OF COMPATIBILITIES AVAILABLE

BEGO

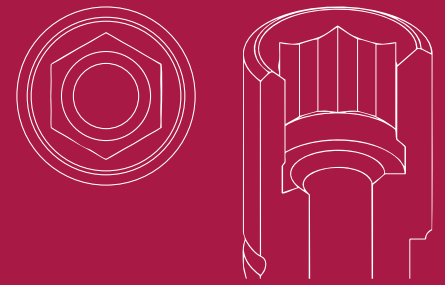


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.321.049.01-2	31.311.049.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.116.01-2	50.311.049.01-2	43.621.410.01-2
12	52.412.116.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.325.472.01-2*	34.611.049.01-2
4		33.425.472.01-2*	
6		33.625.472.01-2*	

* Only for titanium and soft materials



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.064.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.004.01-2	Hex. 1.25	43.601.104.01-2



COMPATIBLE WITH OO50

LIST OF COMPATIBILITIES **AVAILABLE**
BEGO

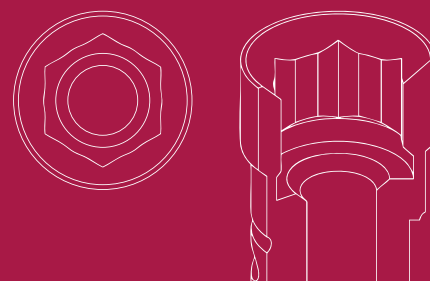

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	27°	31.323.051.01-2	31.313.051.01-2
2	25°	-	31.323.051.03-2	31.313.051.03-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	31.323.051.23-2	31.313.051.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.117.01-2	50.312.050.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.335.676.01-2	34.612.050.01-2
4	25°	33.435.676.01-2	
6		33.635.676.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.064.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.050.01-2
2	42.302.050.02-2

[VIEW COMPONENTS](#)


COMPATIBLE WITH OO51

LIST OF COMPATIBILITIES **AVAILABLE**
BEGO

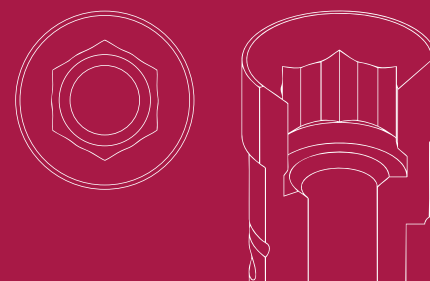

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	25°	31.323.051.01-2	31.313.051.01-2
2	25°	-	31.323.051.03-2	31.313.051.03-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	31.323.051.23-2	31.313.051.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.118.01-2	50.313.051.01-2	43.621.410.01-2
12	52.412.118.01-2	50.313.051.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.335.676.01-2	34.613.051.01-2
4	25°	33.435.676.01-2	
6		33.635.676.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.064.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2



COMPATIBLE WITH OO52

LIST OF COMPATIBILITIES **AVAILABLE**
BEGO

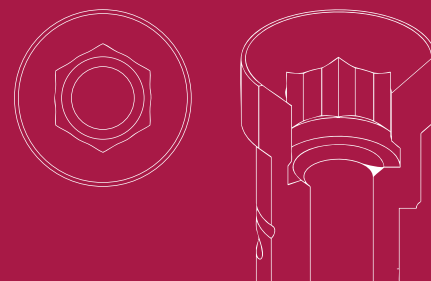

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	27°	31.324.052.01-2	31.314.052.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2		43.621.410.01-2
12	52.412.102.01-2	50.314.052.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.335.676.01-2	34.614.052.01-2
4	30°	33.435.676.01-2	
6		33.635.676.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.064.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2



COMPATIBLE WITH OO54

LIST OF COMPATIBILITIES **AVAILABLE**
KLOCKNER

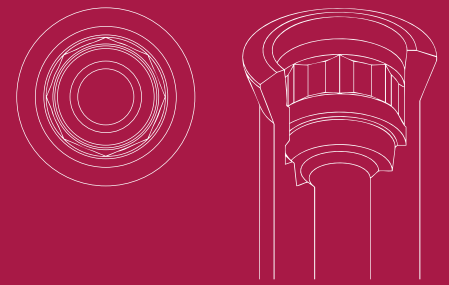


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	25°	31.323.054.01-2	31.313.054.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.119.01-2	50.314.054.01-2	43.621.410.01-2
12	52.412.119.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.345.856.01-2	34.614.054.01-2
4		33.445.856.01-2	
6		33.645.856.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.318.067.01-2	24	43.624.201.01-2
41.318.051.02-2 (OCTACONE 12° & PILAR 25°)	32	43.632.201.01-2



STRAIGHT SCREW


40.318.012.01-2



COMPATIBLE WITH OO57

LIST OF COMPATIBILITIES AVAILABLE

BIOMET 3i

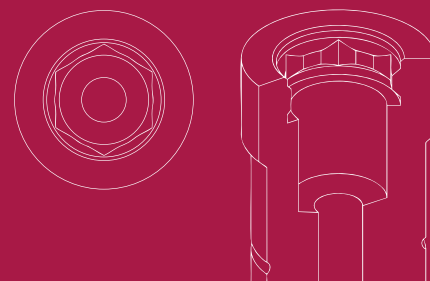


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	27°	31.324.057.01-2	31.314.057.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.314.057.01-2	43.621.410.01-2 43.624.410.01-2
12	52.412.101.01-2		



LAB SCANBODY
30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.805.01-2	22.614.057.01-2	34.614.057.01-2
4	30°	33.490.805.01-2		
6		33.690.805.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



COMPATIBLE WITH OO58

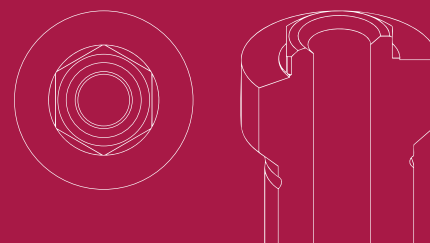

LIST OF COMPATIBILITIES AVAILABLE

ACE - ANTHOGRYR - B&W - BIOGENESIS - BIOMET 3i - BIONER - EASY IMPLANT - LEADER - MEGAGEN - MICRODENT
MIS - MPI - OSSTEM IMPLANT - PROCLINIC - SIN IMPLANTS - SOUTHERN IMPLANTS - TBR

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	30°	31.324.058.01-2	31.314.058.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.118.01-2	50.314.058.01-2	43.621.410.01-2
12	52.412.118.01-2		43.624.410.01-2



LAB SCANBODY

30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3	30°	33.390.716.01-2	22.614.058.01-2	34.614.058.01-2
4		33.490.716.01-2		
6		33.690.716.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.047.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.02-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH OO59

LIST OF COMPATIBILITIES **AVAILABLE**
BTI

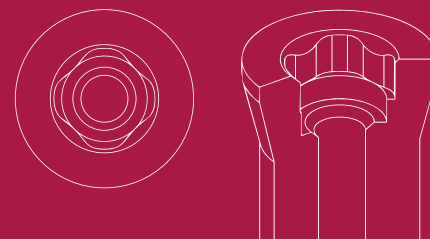

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,7	45°	27°	31.324.059.01-2	31.314.059.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.115.01-2	50.313.010.01-2	43.621.410.01-2
12	52.412.115.01-2	50.313.010.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY

30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG
3		33.390.716.01-2	22.614.059.01-2
4	30°	33.490.716.01-2	
6		33.690.716.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.02-2	Hex. 1.20	43.601.103.02-2



COMPATIBLE WITH OO60

LIST OF COMPATIBILITIES **AVAILABLE**
BTI

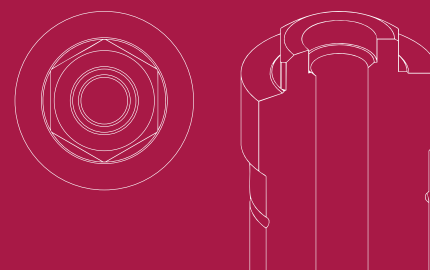

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	30°	31.324.060.01-2	31.314.060.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.122.01-2	50.314.060.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY

30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.716.01-2	22.614.060.01-2	34.614.060.01-2
4	30°	33.490.716.01-2		
6		33.690.716.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.060.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.02-2	Hex. 1.20	43.601.103.02-2



COMPATIBLE WITH OO61

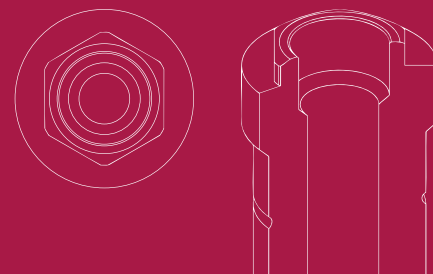

LIST OF COMPATIBILITIES **AVAILABLE**

AVINENT - COWELLMEDI - DENTIS - DIO IMPLANTS - ELITE MEDICA - GMI (ILERIMPLANT) - GT MEDICAL - KEYSTONE
KLOCKNER - MOZO-GRAU (TICARE) - NOBEL BIO CARE - OSSTEM IMPLANT - TREE- OSS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.324.061.01-2	31.314.061.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.125.01-2	50.314.061.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY
30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.390.958.01-2	22.614.061.01-2	34.614.061.01-2
4	30°	33.490.958.01-2		
6		33.690.958.01-2		



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.325.067.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.325.008.01-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH OO66

LIST OF COMPATIBILITIES **AVAILABLE**
ASTRA

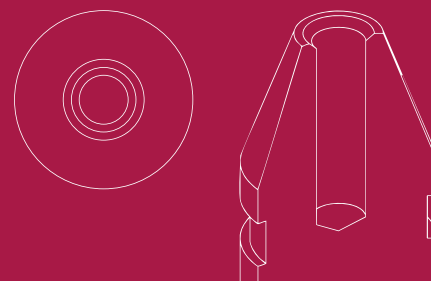

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.066.01-2	-



LAB SCANBODY
30.412.001.01-2



ANALOG

ANALOG
22.613.066.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.039.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.01-2	UNIGRIP	43.601.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH OO74

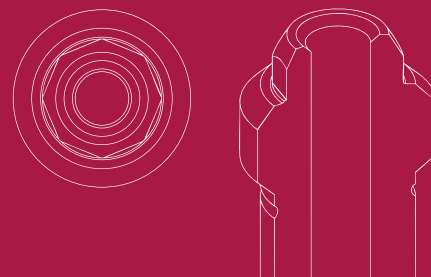

LIST OF COMPATIBILITIES **AVAILABLE**

ANTHOGYR - DENTIUM - DENTIS - DIO IMPLANTS - EUROTEKNIKA - GT MEDICAL - IMPLANT DIRECT - MEGAGEN - PROCLINIC - STRAUMANN - TRINON - ZIMMER

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.323.074.01-2	31.313.074.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
8	52.408.110.01-2		
10	52.410.110.01-2	50.313.074.01-2	43.621.410.01-2 43.624.410.01-2
12	52.412.110.01-2		



LAB SCANBODY	SCANALOG
30.415.007.01-2	23.413.074.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.330.708.01-2	22.613.074.01-2	34.613.074.01-2
4	30°	33.430.708.01-2		
6		33.630.708.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation


SCANBODY REFERENCE

SCREWS



COMPATIBLE WITH OO75

LIST OF COMPATIBILITIES **AVAILABLE**
ANKLYOS

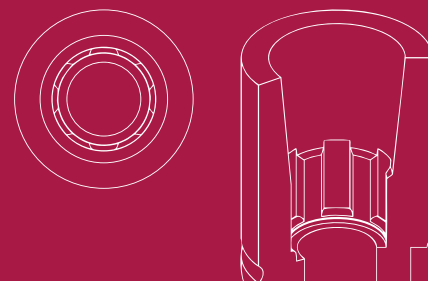

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	42°	24°	31.322.075.01-2	-
2	20°	15°	31.322.075.02-2	31.312.075.02-2
3	20°	-	31.322.075.03-2	31.312.075.03-2
4	15°	-	31.322.075.04-2	31.312.075.04-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	30°	20°	15°	31.322.075.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2		43.621.410.01-2
12	52.412.105.01-2	50.312.075.03-2 (IG=3mm)	43.624.410.01-2



LAB
SCANBODY

30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL


ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3		33.330.734.01-2	22.612.075.01-2	34.612.075.01-2
4	25°	33.430.734.01-2		
6		33.630.734.01-2		



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE
54.315.075.21-2	49.414.000.01-2	6	A
	49.415.000.01-2	9	A
	49.416.000.01-2	13	A
	49.414.000.02-2	6	B
	49.415.000.02-2	9	B
	49.416.000.02-2	13	B
	49.414.000.03-2	6	C
	49.415.000.03-2	9	C
	49.416.000.03-2	13	C
	49.416.000.04-2	13	D
	49.416.000.05-2	13	E



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.318.077.01-2	41.318.112.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW

40.318.013.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
2	42.302.075.02-2
3	42.302.075.03-2
4	42.302.075.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
3	62.302.075.03-2
VIEW COMPONENTS	



COMPATIBLE WITH OO80

LIST OF COMPATIBILITIES **AVAILABLE**
BIOHORIZONS - ZIMMER

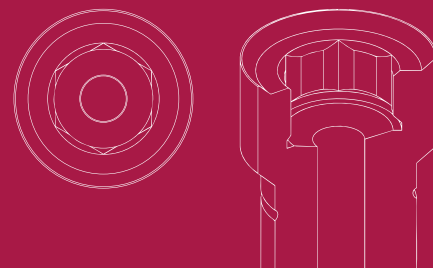


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,4	45°	30°	31.324.080.01-2	31.314.080.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.124.01-2	50.314.080.01-2	43.621.410.01-2
12	52.412.124.01-2		43.624.410.01-2



LAB SCANBODY

30.414.003.01-2



DYNAMIC MILLING TOOL


SHANK	α_{di}	DYNAMIC MILLING TOOL	ANALOG	DIGITAL ANALOG
3	30°	33.370.716.01-2	22.614.080.01-2	34.614.080.01-2
4		33.470.716.01-2		
6		33.670.716.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.080.21-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.004.01-2	Hex. 1.27	43.601.104.01-2



COMPATIBLE WITH OO81

LIST OF COMPATIBILITIES **AVAILABLE**
BEGO

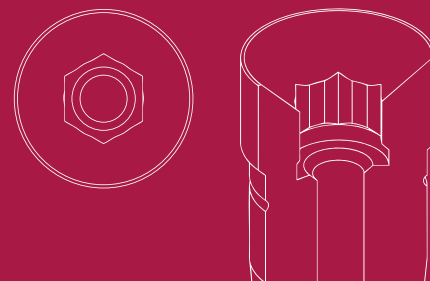

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,4	41°	18°	31.325.081.01-2	31.315.081.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.126.01-2	50.315.081.01-2	43.621.410.01-2
12	52.412.126.01-2		43.624.410.01-2




LAB SCANBODY

30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.335.676.01-2	34.615.081.01 -2
4		33.435.676.01-2	
6		33.635.676.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.064.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.004.03-2	Hex. 1.25	43.601.104.01-2



COMPATIBLE WITH OO82

LIST OF COMPATIBILITIES **AVAILABLE**
KLOCKNER

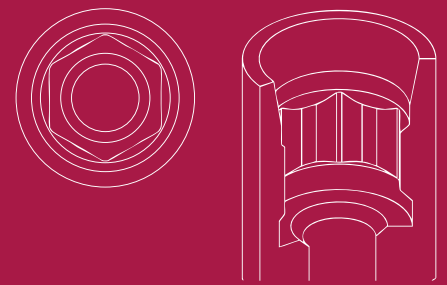


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	45°	25°	31.322.082.01-2	31.312.082.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.105.01-2	50.312.082.01-2	43.621.410.01-2
12	52.412.105.01-2		43.624.410.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.345.804.01-2
4		33.445.804.01-2
6		33.645.804.01-2

ANALOG

DIGITAL ANALOG
34.612.082.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW

40.316.012.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT


GH (mm)	NON ENGAGING
1	42.302.082.01-2
2	42.302.082.02-2
3	42.302.082.03-2
4	42.302.082.04-2

VIEW COMPONENTS



COMPATIBLE WITH OO83

LIST OF COMPATIBILITIES **AVAILABLE**
KLOCKNER

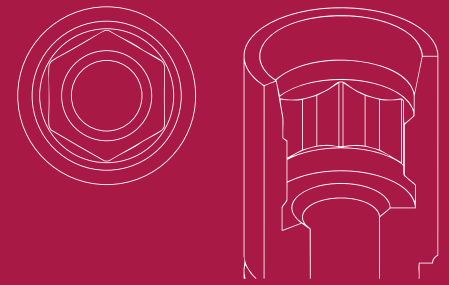


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	45°	25°	31.323.083.01-2	31.313.083.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.313.083.01-2	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.345.856.01-2	34.613.083.01-2
4		33.445.856.01-2	
6		33.645.856.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.076.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW

40.318.012.02-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.083.01-2
2	42.303.083.02-2
3	42.303.083.03-2
4	42.303.083.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO84

LIST OF COMPATIBILITIES **AVAILABLE**
XIVE

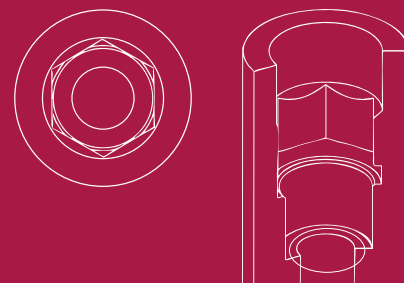

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	40°	-	31.321.084.01-2	31.311.084.01-2



LAB SCANBODY

30.410.006.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.084.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.076.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.003.03-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αi = Direct to implant maximum angulation

COMPATIBLE WITH OO85

LIST OF COMPATIBILITIES **AVAILABLE**
XIVE

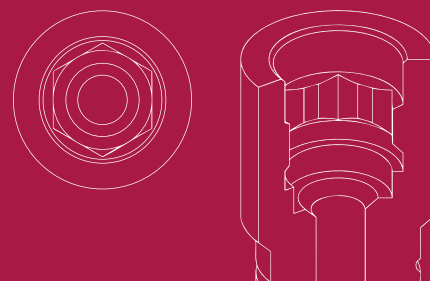

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	30°	31.324.085.01-2	31.314.085.01-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	20°	-	31.314.085.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.314.085.01-2	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.856.01-2	34.614.085.01-2
4	25°	33.445.856.01-2	
6		33.645.856.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.085.21-2	49.414.000.01-2	6	A	43.601.104.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
----------------	------	-------------


40.316.004.02-2 Hex. 1.25 43.601.104.01-2

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation



COMPATIBLE WITH OO86

LIST OF COMPATIBILITIES **AVAILABLE**
XIVE

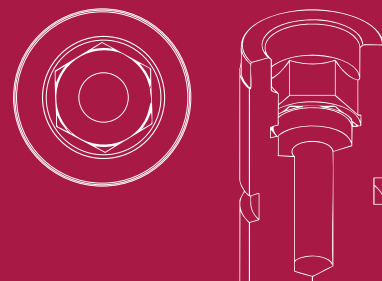


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	45°	-	31.325.086.01-2	31.315.086.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.314.085.01-2	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY

30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.02-2	Hex. 1.25	43.601.104.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH OO87

LIST OF COMPATIBILITIES **AVAILABLE**
CAMLOG

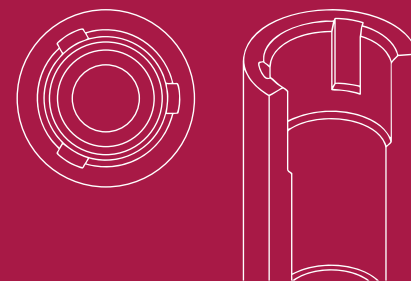

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	25°	-	31.321.087.01-2	31.311.087.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	20°	20°	15°	-	31.311.087.21-2
2	25°	20°	15°	-	31.311.087.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2		
12	52.412.132.01-2	50.311.087.04-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY

30.410.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.087.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.094.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.04-2	Hex. 1.27	43.625.105.01-2



COMPATIBLE WITH OO88

LIST OF COMPATIBILITIES **AVAILABLE**
CAMLOG

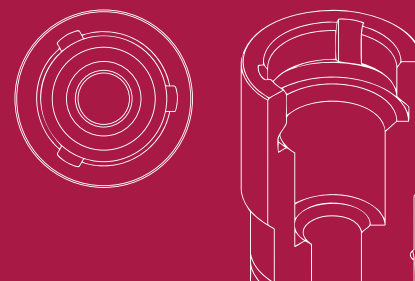

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	25°	-	31.324.088.01-2	31.314.088.01-2




LAB SCANBODY

30.414.003.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.088.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.094.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.04-2	Hex. 1.27	43.625.105.01-2



COMPATIBLE WITH 0090

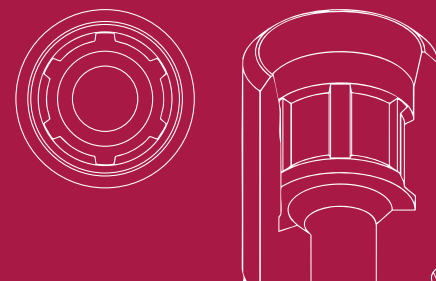

LIST OF COMPATIBILITIES AVAILABLE ASTRA

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	45°	24°	31.321.090.01-2	31.311.090.01-2
2	25°	-	31.321.090.02-2	31.311.090.02-2
3	20°	-	31.321.090.03-2	31.311.090.03-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	15°	-	31.311.090.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.128.01-2	50.311.090.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY

30.410.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.325.472.01-2*	34.611.090.01-2
4	25°	33.425.472.01-2*	
6		33.625.472.01-2*	


*Only for R

*Only for titanium and soft materials



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.090.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	




SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.074.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.01-2	Hex. 1.27	43.625.105.01-2

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH 0091

LIST OF COMPATIBILITIES **AVAILABLE**
ASTRA

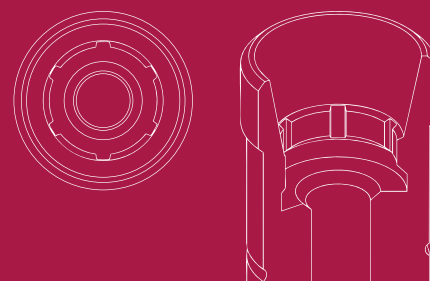

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	38°	18°	31.324.091.01-2	31.314.091.01-2
2	25°	-	31.324.091.02-2	31.314.091.02-2
3	20°	25°	31.324.091.03-2	31.314.091.03-2
4	15°	25°	31.324.091.04-2	31.314.091.04-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,2	30°	25°	15°	-	31.314.091.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.102.01-2		43.621.410.01-2
12	52.412.102.01-2	50.314.091.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.958.01-2	34.614.091.01-2
4	30°	33.490.958.01-2	
6		33.690.958.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.091.21-2	49.416.000.02-2	13	B	43.625.105.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.320.074.01-2		18	43.618.201.01-2
41.320.082.01-2 (IMPLANT DIRECT)	41.320.129.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	ENGAGING
1	42.303.091.01-2
2	42.303.091.02-2
3	42.303.091.03-2
4	42.303.091.04-2
VIEW COMPONENTS	



COMPATIBLE WITH OO92

LIST OF COMPATIBILITIES **AVAILABLE**
ASTRA

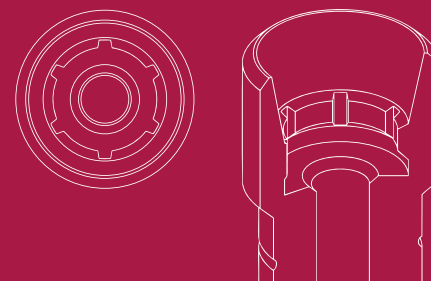

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	45°	25°	31.325.092.01-2	31.315.092.01-2
2	25°	-	31.325.092.02-2	31.315.092.02-2
3	20°	-	31.325.092.03-2	31.315.092.03-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	15°	-	31.315.092.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.129.01-2	50.315.092.01-2 50.315.092.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY

30.415.007.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.958.01-2	34.615.092.01-2
4	30°	33.490.958.01-2	
6		33.690.958.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.092.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.320.074.01-2	41.320.129.01-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.005.01-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH OO96

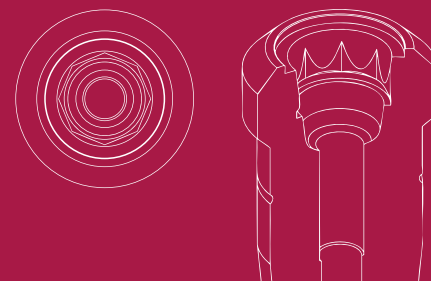

LIST OF COMPATIBILITIES **AVAILABLE**

ACE - ANTHOGRY - DENTIUM - EUROTEKNIKA - IMPLANT DIRECT - PROCLINIC - SOUTHERN IMPLANTS - STRAUMANN

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.324.096.01-2	31.314.096.01-2



LAB SCANBODY	SCANALOG
30.414.008.01-2	23.414.096.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.315.708.01-2
4	30°	33.415.708.01-2
6		33.615.708.01-2

ANALOG

ANALOG	DIGITAL ANALOG
22.614.096.01-2	34.614.096.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.096.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.067.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.01-2	TORX T6	43.601.107.01-2



COMPATIBLE WITH O101

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN



STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.101.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.133.01-2	50.313.101.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY	MINI SCANBODY	SCANALOG
30.413.005.01-2	53.413.101.01-2	23.413.101.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.335.676.01-2	34.613.101.01-2
4	30°	33.435.676.01-2	
6		33.635.676.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.101.31-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
CAPS		HEIGHT	TYPE	
49.418.000.01-2		3,8	Regular	
49.418.000.02-2		3,8	Wide	
49.419.000.01-2		6	Regular	
49.419.000.02-2		6	Wide	
49.420.000.01-2		8	Regular	
49.420.000.02-2		8	Wide	



SCREWS


DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.314.043.01-2	41.314.050.31-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER	
40.314.007.01-2	TORX T6	43.601.107.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O102

LIST OF COMPATIBILITIES **AVAILABLE**
BIOHORIZONS

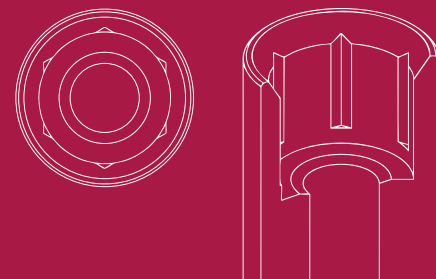

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,8	38°	18°	31.322.102.01-2	31.312.102.01-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1	30°	25°	20°	31.322.102.29-2	31.312.102.29-2
1,8	25°	15°	10°	31.322.102.21-2	31.312.102.21-2
3	20°	20°	15°	31.322.102.23-2	31.312.102.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.128.01-2	50.312.102.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY	SCANALOG
30.412.001.01-2	23.412.102.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.856.01-2	34.612.102.01-2
4	25°	33.445.856.01-2	
6		33.645.856.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.102.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.317.005.02-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.102.01-2
2	42.302.102.02-2
3	42.302.102.03-2
4	42.302.102.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2.5/3.9	48.312.102.02-2
VIEW COMPONENTS	



COMPATIBLE WITH O109

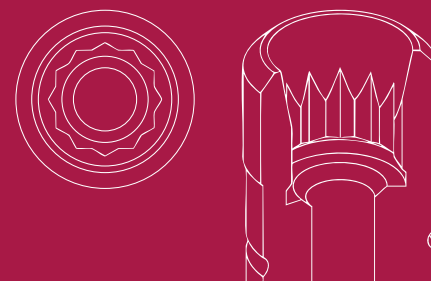

LIST OF COMPATIBILITIES **AVAILABLE**

ASTRA - CORTEX - MOZO-GRAU (TICARE) - SOUTHERN IMPLANTS

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	45°	29°	31.322.109.01-2	31.312.109.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.312.109.01-2	43.621.415.01-2



LAB SCANBODY

30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.360.754.01-2*
4	25°	33.460.754.01-2*
6		33.660.754.01-2*

ANALOG

DIGITAL ANALOG	ANALOG
34.612.109.01-2	22.612.109.01-2



*Only for R

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.070.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.02-2	Hex. 1.27	43.625.105.01-2



COMPATIBLE WITH O110

LIST OF COMPATIBILITIES **AVAILABLE**
BREDENT MEDICAL

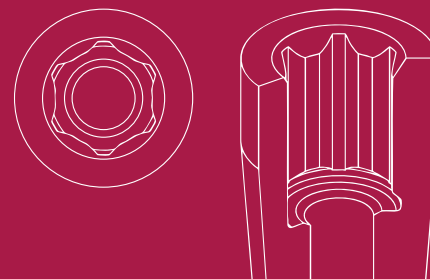


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,4	45°	30°	31.320.110.01-2	31.310.110.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.310.110.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2




LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.360.756.01-2*	34.610.110.01-2
4		33.460.756.01-2*	
6		33.660.756.01-2*	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.083.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.007.01-2	TORX T6	43.601.107.01-2



COMPATIBLE WITH O111

LIST OF COMPATIBILITIES **AVAILABLE**
BREDENT MEDICAL

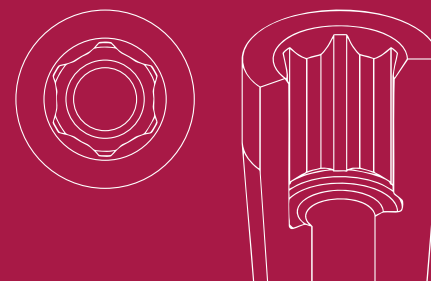


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,4	45°	30°	31.323.111.01-2	31.313.111.01-2
2,5	25°	-	-	31.313.111.03-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.310.110.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2




LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.360.756.01-2	34.610.110.01-2
4		33.460.756.01-2	
6		33.660.756.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.083.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.007.01-2	TORX T6	43.601.107.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.111.01-2
2	42.303.111.02-2
3	42.303.111.03-2
4	42.303.111.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O119

LIST OF COMPATIBILITIES **AVAILABLE**
BIOHORIZONS - CAMLOG

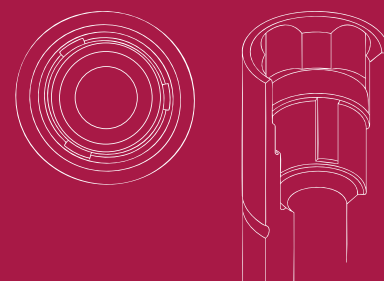

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	35°	-	31.321.119.01-2	31.311.119.01-2
2	30°	-	31.321.119.02-2	31.311.119.02-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREW/DRIVER ADAPTOR
10	52.410.132.01-2		
12	52.412.132.01-2	50.311.119.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.360.756.01-2	34.611.119.01-2
4	25°	33.460.756.01-2	
6		33.660.756.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.119.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

**SCREWS**

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.07-2	Hex. 1.27	43.625.105.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.301.119.01-2
2	42.301.119.02-2
3	42.301.119.03-2
4	42.301.119.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
3.5/4.9	48.312.119.03-2
VIEW COMPONENTS	



COMPATIBLE WITH O120

LIST OF COMPATIBILITIES **AVAILABLE**
BIOHORIZONS - CAMLOG

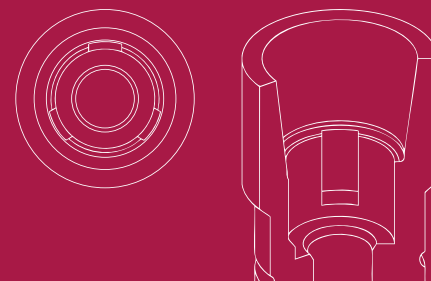

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	45°	25°	31.323.121.01-2	31.313.121.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	-	31.313.121.22-2
3	25°	20°	10°	-	31.313.121.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.108.01-2		43.621.410.01-2
12	52.412.108.01-2	50.312.120.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.360.754.01-2	34.612.120.01-2
4		33.460.754.01-2	
6		33.660.754.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.121.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.07-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.121.01-2
2	42.303.121.02-2
3	42.303.121.03-2
4	42.303.121.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2,5/3,9	48.312.120.02-2
3,5/4,9	48.312.120.03-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.121.02-2
4	62.303.121.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O121

LIST OF COMPATIBILITIES **AVAILABLE**
CAMLOG

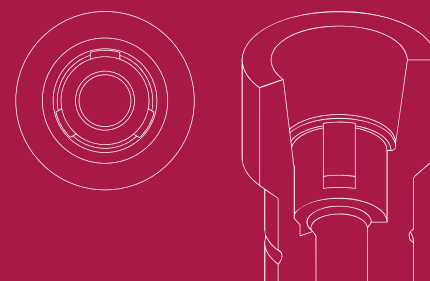

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	45°	25°	31.323.121.01-2	31.313.121.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
2	25°	20°	15°	-	31.313.121.22-2
3	25°	20°	10°	-	31.313.121.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.109.01-2	50.313.121.01-2	43.621.410.01-2
12	52.412.109.01-2	50.313.121.03-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.360.754.01-2	34.613.121.01-2
4		33.460.754.01-2	
6		33.660.754.01-2	



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.121.21-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.07-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.121.01-2
2	42.303.121.02-2
3	42.303.121.03-2
4	42.303.121.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
2	62.303.121.02-2
4	62.303.121.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O124

LIST OF COMPATIBILITIES **AVAILABLE**
HAHN IMPLANT (GLIDEWELL) - NOBEL BIO CARE

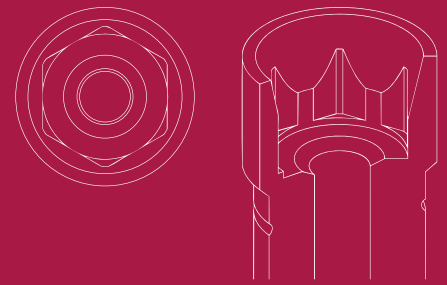

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,4	42°	19°	31.324.124.01-2	31.314.124.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.125.01-2	50.314.124.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY

30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.335.758.01-2	34.614.124.01-2
4	30°	33.435.758.01-2	
6		33.635.758.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.124.21-2	49.414.000.01-2	6	A	43.625.108.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.075.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.02-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH O125

LIST OF COMPATIBILITIES **AVAILABLE**
MEDENTIS

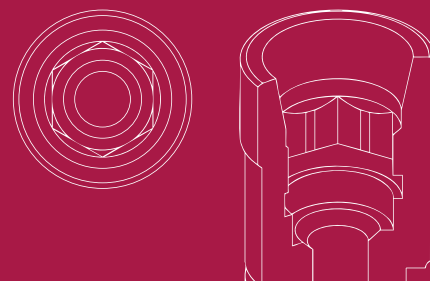

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,1	42°	20°	31.323.125.01-2	31.313.125.01-2
2	25°	15°	31.323.125.02-2	31.313.125.02-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,1	30°	25°	15°	31.323.125.21-2	31.313.125.21-2
3	20°	15°	10°	-	31.313.125.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.313.125.01-2	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL**ANALOG**

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.315.804.01-2	34.613.125.01-2
4	25°	33.415.804.01-2	
6		33.615.804.01-2	

**SCANBODY OP**

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.125.21-2	49.416.000.02-2	13	B	43.601.103.02-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

**SCREWS**

DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
		18	43.618.201.01-2
41.316.078.01-2	41.316.124.01-2	24	43.624.201.01-2
		32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.125.01-2
2	42.303.125.02-2
3	42.303.125.03-2
4	42.303.125.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.125.01-2
2,5/3,9	48.312.125.02-2
3,5/4,9	48.312.125.03-2
VIEW COMPONENTS	



COMPATIBLE WITH O128

LIST OF COMPATIBILITIES **AVAILABLE**
MEGAGEN

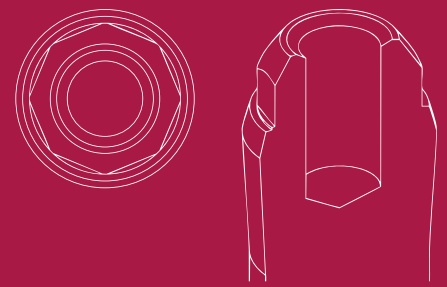

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
2,5	45°	30°	31.322.128.01-2	-
0,5	35°	-	31.323.128.02-2	-
LAB SCANBODY				
30.413.002.01-2				



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.044.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.003.05-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O129

LIST OF COMPATIBILITIES **AVAILABLE**
NOBEL BIOCARE - SOUTHERN IMPLANTS

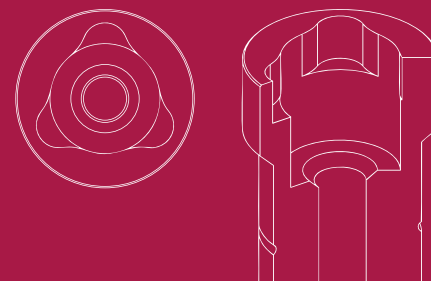

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	35°	30°	31.325.129.01-2	31.315.129.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.130.01-2	50.315.129.01-2	43.621.410.01-2 43.624.410.01-2



LAB SCANBODY

30.415.007.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG	ANALOG
3		33.390.958.01-2	34.615.129.01-2	22.615.129.01-2
4	30°	33.490.958.01-2		
6		33.690.958.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.090.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.008.03-2	UNIGRIP	43.625.108.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O130

LIST OF COMPATIBILITIES **AVAILABLE**
DENTAURUM

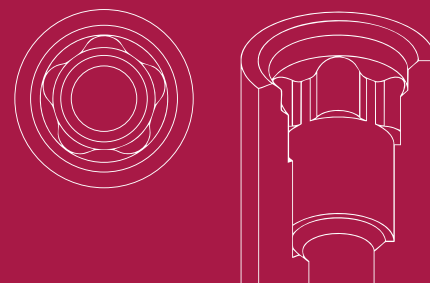

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	30°	29°	31.322.130.01-2	31.312.130.01-2



LAB SCANBODY

30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.08-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O131

LIST OF COMPATIBILITIES **AVAILABLE**
DENTAURUM

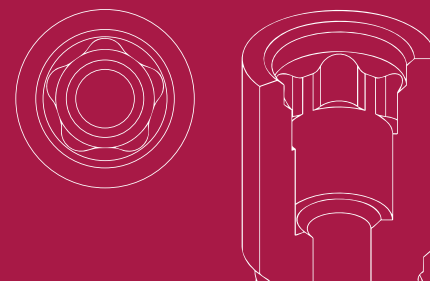

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	29°	31.323.131.01-2	31.313.131.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,5	30°	20°	15°	31.323.131.21-2	31.313.131.21-2



LAB SCANBODY

30.413.002.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.081.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.08-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O132

LIST OF COMPATIBILITIES **AVAILABLE**
DENTAURUM

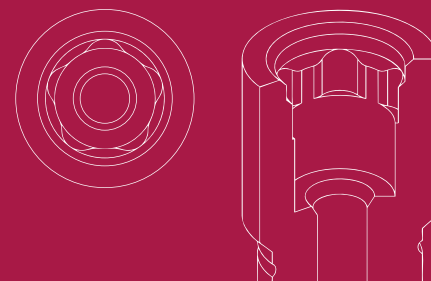

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	28°	31.324.132.01-2	31.314.132.01-2



LAB SCANBODY

30.414.003.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.081.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.005.08-2	Hex. 1.27	43.625.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O135

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

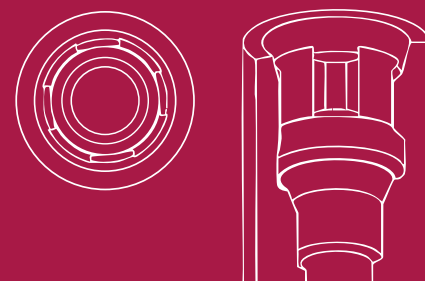

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	45°	30°	31.320.135.01-2	31.310.135.01-2



LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.315.804.01-2
4	25°	33.415.804.01-2
6		33.615.804.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.135.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

**SCREWS**

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.007.02-2	TORX T6	43.601.107.01-2



COMPATIBLE WITH O136

LIST OF COMPATIBILITIES **AVAILABLE**
ALPHABIO

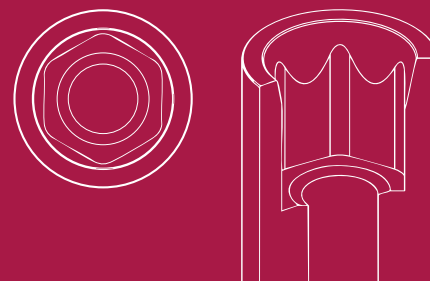

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,7	45°	30°	31.320.136.01-2	31.310.136.01-2
1,5	25°	20°	31.320.136.02-2	31.310.136.02-2
3	20°	-	31.320.136.04-2	31.310.136.04-2
4	20°	-	31.320.136.05-2	31.310.136.05-2
5	15°	-	31.320.136.06-2	31.310.136.06-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.136.01-2 50.310.136.04-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.360.754.01-2	34.610.136.01-2
4	25°	33.460.754.01-2	
6		33.660.754.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.071.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.004.03-2	Hex. 1.25	43.601.104.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.300.136.01-2
2	42.300.136.02-2
3	42.300.136.03-2
4	42.300.136.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O137

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

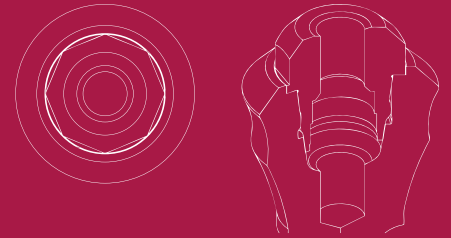

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	30°	31.324.137.01-2	31.314.137.01-2



LAB SCANBODY

30.414.008.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.044.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.320.007.04-2	TORX T6	43.601.107.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O145

LIST OF COMPATIBILITIES **AVAILABLE**
ADIN

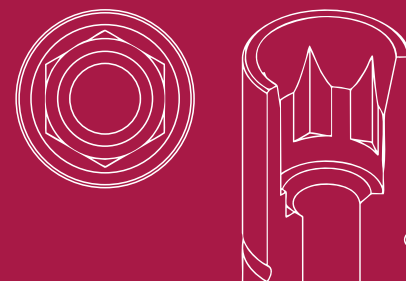

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	45°	-	31.320.145.01-2	31.310.145.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.128.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.315.078.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.01-2	Hex. 1.27	43.601.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O149

LIST OF COMPATIBILITIES **AVAILABLE**
ANTHOGYR

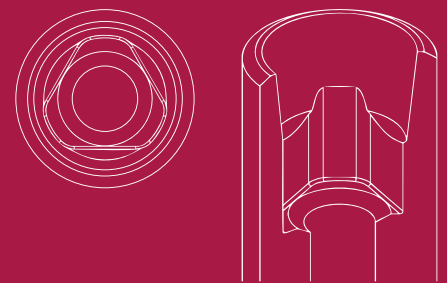

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	45°	29°	31.323.149.01-2	31.313.149.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.310.161.01-2	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY
30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	25°	33.320.704-01-2*
4		33.420.704.01-2*
6		33.620.704.01-2*

ANALOG

DIGITAL ANALOG
34.610.161.01-2



*Only for R

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW
40.316.014.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.161.01-2
2	42.302.161.02-2
3	42.302.161.03-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
3/4,4	48.312.161.05-2
VIEW COMPONENTS	



COMPATIBLE WITH O150

LIST OF COMPATIBILITIES **AVAILABLE**
BEGO

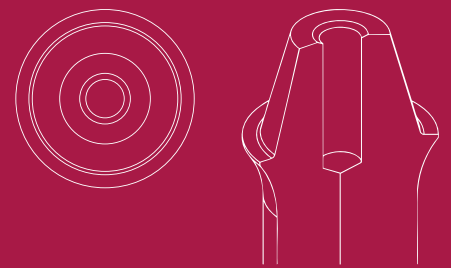

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	-	31.323.150.01-2	-



LAB SCANBODY

30.413.005.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.046.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O151

LIST OF COMPATIBILITIES AVAILABLE

BTI

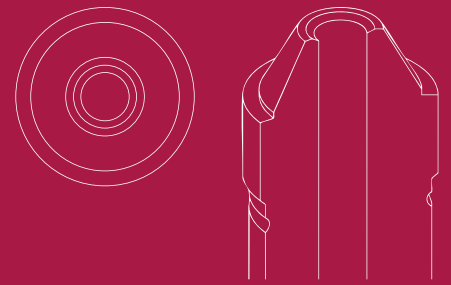

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.151.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
9	52.409.123.01-2	50.313.151.01-2	43.621.410.01-2 43.624.410.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.613.151.01-2
4	30°	33.490.716.01-2	
6		33.690.716.01-2	

ANALOG



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.039.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.01-2	UNIGRIP	43.625.108.01-2



COMPATIBLE WITH O158

LIST OF COMPATIBILITIES **AVAILABLE**
IMPLANT DIRECT

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.158.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.040.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O159

LIST OF COMPATIBILITIES **AVAILABLE**

HAHN IMPLANT (GLIDEWELL) - NOBEL BIO CARE - REFLECT

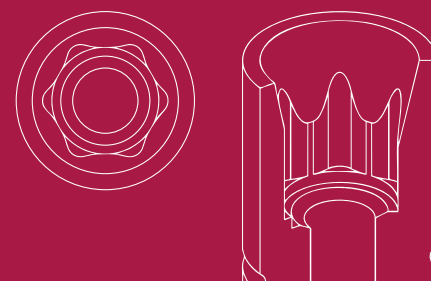


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	41°	17°	31.320.159.01-2	31.310.159.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.159.01-2	43.621.415.01-2



LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG	ANALOG
3		33.335.754.01-2*	34.610.159.01-2	22.610.159.01-2
4	25°	33.435.754.01-2*		
6		33.635.754.01-2*		

*Only for R



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.067.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.008.02-2	UNIGRIP	43.625.108.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.300.159.01-2
2	42.300.159.02-2
3	42.300.159.03-2
4	42.300.159.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O160

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

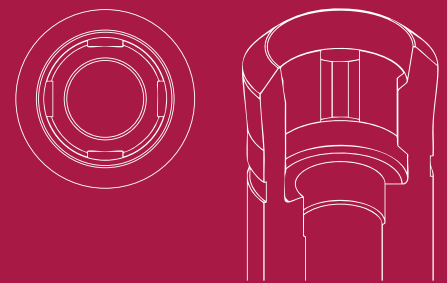


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	30°	31.320.160.01-2	31.310.160.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.131.01-2	50.310.160.01-2	43.621.415.01-2



LAB SCANBODY	SCANALOG
30.410.006.01-2	23.410.160.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG	ANALOG
3		33.315.804.01-2	34.610.160.01-2	22.610.160.01-2
4	25°	33.415.804.01-2		
6		33.615.804.01-2		



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.078.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	TORX T6	43.601.107.01-2



COMPATIBLE WITH O161

LIST OF COMPATIBILITIES **AVAILABLE**
ANTHOGRYR

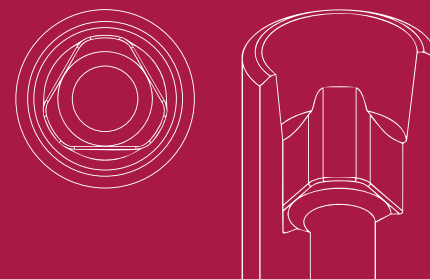

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	45°	25°	31.320.161.01-2	31.310.161.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.310.161.01-2	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY


30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.320.704.01-2*	34.610.161.01-2
4		33.420.704.01-2*	
6		33.620.704.01-2*	

*Only for R



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.170.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW

40.316.014.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.161.01-2
2	42.302.161.02-2
3	42.302.161.03-2
4	42.302.161.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	NON ENGAGING
3/4.4	48.312.161.05-2
VIEW COMPONENTS	



COMPATIBLE WITH O162

LIST OF COMPATIBILITIES **AVAILABLE**
ANTHOGYR

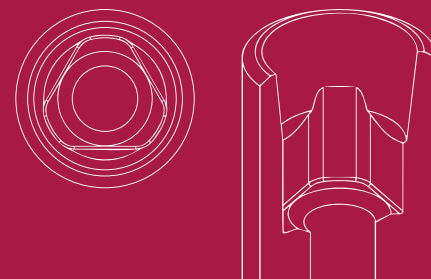

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	45°	24°	31.324.162.01-2	31.314.162.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.132.01-2	50.310.161.01-2	43.621.415.01-2
12	52.412.132.01-2		



LAB SCANBODY


30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.320.704.01-2*	34.610.161.01-2
4		33.420.704.01-2*	
6		33.620.704.01-2*	

*Only for R



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT
SCREW

40.316.014.01-2



COMPATIBLE WITH O163



LIST OF COMPATIBILITIES AVAILABLE ANTHOGYR

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.163.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.163.01-2	43.620.411.01-2



LAB SCANBODY

30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.390.716.01-2	34.613.163.01-2
4	30°	33.490.716.01-2	
6		33.690.716.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.039.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW

40.314.014.01-2



COMPATIBLE WITH O166

LIST OF COMPATIBILITIES **AVAILABLE**
LASAK

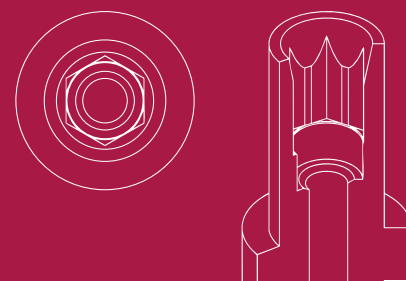

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,9	45°	30°	31.320.166.01-2	31.310.166.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.166.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY
30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.335.754.01-2	34.610.166.01-2
4	25°	33.435.754.01-2	
6		33.635.754.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.084.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O167

LIST OF COMPATIBILITIES **AVAILABLE**
LASAK

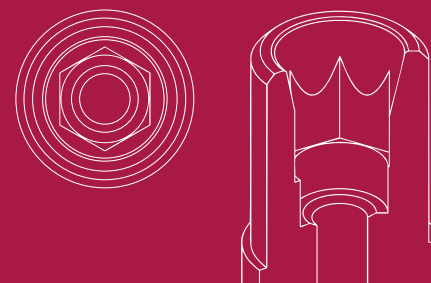

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,9	43°	30°	31.322.167.01-2	31.312.167.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.313.167.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.117.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	20°	33.330.734.01-2	34.613.167.01-2
4		33.430.734.01-2	
6		33.630.734.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation


SCREWS

DYNAMIC SCREW	LENTH	SCREWDRIVER
41.316.084.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH O169

LIST OF COMPATIBILITIES **AVAILABLE**
ALPHABIO

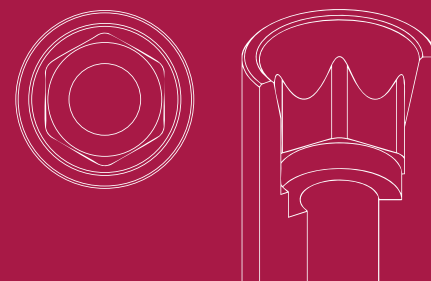

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	45°	29°	31.322.169.01-2	31.312.169.01-2
1,5	25°	15°	31.322.169.02-2	31.312.169.02-2
3	20°	-	31.322.169.04-2	31.312.169.04-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,5	30°	25°	15°	31.322.169.22-2	31.312.169.22-2
3	25°	20°	15°	31.322.169.24-2	31.312.169.24-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.117.01-2	50.312.169.01-2	43.621.410.01-2
12	52.412.117.01-2	50.312.169.04-2 (IG=3mm)	43.624.410.01-2



LAB SCANBODY


30.412.001.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL**ANALOG**

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.330.734.01-2	34.612.169.01-2
4	25°	33.430.734.01-2	
6		33.630.734.01-2	

**SCANBODY OP**

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
54.315.169.21-2	49.416.000.02-2	13	B	43.601.104.01-2
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

**SCREWS**

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.317.070.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.169.01-2
2	42.302.169.02-2
3	42.302.169.03-2
4	42.302.169.04-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.169.01-2
2,5/3,9	48.312.169.02-2
3,5/4,9	48.312.169.03-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	ENGAGING
3	62.302.169.03-2
4	62.302.169.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O170

LIST OF COMPATIBILITIES **AVAILABLE**
SIC INVENT

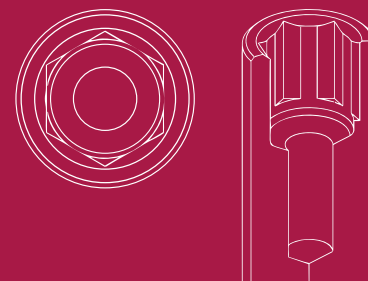

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	38°	-	31.322.170.01-2	31.312.170.01-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	20°	15°	31.322.170.21-2	31.312.170.21-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.104.01-2
12	52.412.104.01-2



LAB SCANBODY
30.410.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.390.716.01-2
4	25°	33.490.716.01-2
6		33.690.716.01-2

**SCANBODY OP**

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.170.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	


**SCREWS**

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH O171

LIST OF COMPATIBILITIES **AVAILABLE**
SIC INVENT

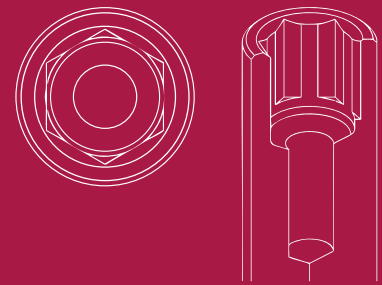

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	35°	-	31.323.171.01-2	31.313.171.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.117.01-2
12	52.412.117.01-2



LAB SCANBODY
30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.390.716.01-2
4	25°	33.490.716.01-2
6		33.690.716.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.170.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	




SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.079.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH O173

LIST OF COMPATIBILITIES **AVAILABLE**
KLOCKNER

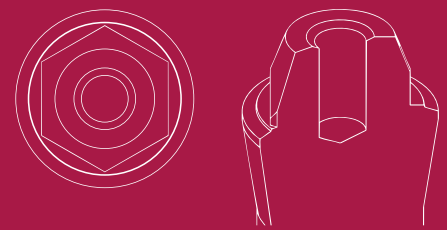

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	30°	31.323.173.01-2	-



LAB SCANBODY
30.413.005.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.040.02-2	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW
40.314.012.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O176

LIST OF COMPATIBILITIES **AVAILABLE**
EASY IMPLANT

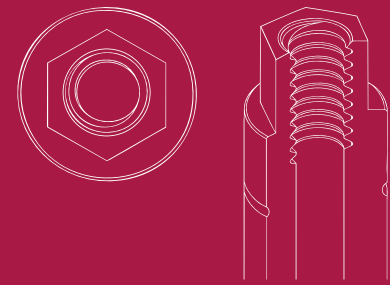

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	35°	-	-	31.310.176.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.138.01-2	50.310.176.01-2	43.621.415.01-2



LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.360.756.01-2	34.610.176.01-2
4	35°	33.460.756.01-2	
6		33.660.756.01-2	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.044.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

COMPATIBLE WITH O178

LIST OF COMPATIBILITIES AVAILABLE

P-I BRANEMARK - ZIMMER

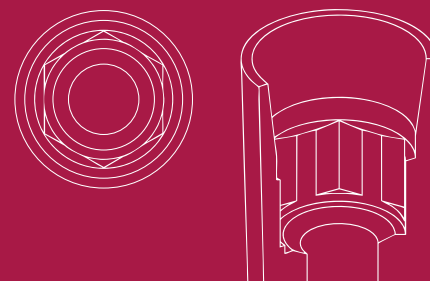

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	45°	-	31.320.178.01-2	31.310.178.01-2



LAB SCANBODY

30.410.006.01-2



ANALOG

DIGITAL ANALOG

34.610.178.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



MULTI-UNIT

INTERNAL MULTI-UNIT

GH (mm)	NON ENGAGING
3	62.300.178.03-2
4	62.300.178.04-2


[VIEW COMPONENTS](#)



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O181

LIST OF COMPATIBILITIES **AVAILABLE**
PALTOP - SURCAM DENTAL

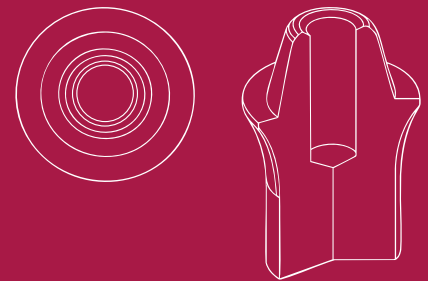

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,4	45°	-	31.322.181.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,4	30°	30°	20°	31.322.181.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.312.181.01-2	43.620.411.01-2



LAB SCANBODY	SCANALOG
30.413.005.01-2	23.412.181.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.360.756.01-2
4	30°	33.460.756.01-2
6		33.660.756.01-2

ANALOG

DIGITAL ANALOG
34.612.181.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.181.31-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.043.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O183

LIST OF COMPATIBILITIES **AVAILABLE**
ANKLYOS

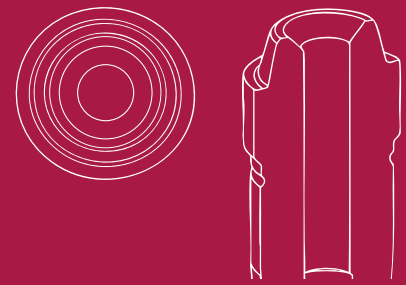

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	-	31.322.183.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.136.01-2	50.312.183.01-2	43.620.411.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.330.734.01-2
4	30°	33.430.734.01-2
6		33.630.734.01-2

ANALOG

DIGITAL ANALOG
34.612.183.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE
54.322.183.31-2	49.414.000.01-2	6	A
	49.415.000.01-2	9	A
	49.416.000.01-2	13	A
	49.414.000.02-2	6	B
	49.415.000.02-2	9	B
	49.416.000.02-2	13	B
	49.414.000.03-2	6	C
	49.415.000.03-2	9	C
	49.416.000.03-2	13	C
	49.416.000.04-2	13	D
	49.416.000.05-2	13	E
	CAPS	HEIGHT	TYPE
	49.418.000.01-2	3,8	Regular
	49.418.000.02-2	3,8	Wide
	49.419.000.01-2	6	Regular
	49.419.000.02-2	6	Wide
	49.420.000.01-2	8	Regular
	49.420.000.02-2	8	Wide



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.048.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O186

LIST OF COMPATIBILITIES **AVAILABLE**
NEODENT

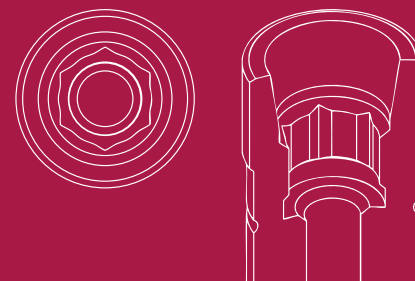

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	40°	30°	31.323.186.01-2	31.313.186.01-2
2,5	20°	18°	31.323.186.02-2	31.313.186.02-2
3,5	15°	-	31.323.186.03-2	31.313.186.03-2




DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,2	30°	25°	15°	31.323.186.21-2	31.313.186.21-2
2,5	30°	25°	15°	31.323.186.22-2	31.313.186.22-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.101.01-2		
10	52.410.101.01-2	50.313.186.04-2 (IG=3mm)	43.621.410.01-2
12	52.412.101.01-2		43.624.410.01-2



LAB SCANBODY

30.413.002.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL**ANALOG**

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.330.734.01-2	34.613.186.01-2
4	25°	33.430.734.01-2	
6		33.630.734.01-2	

**SCANBODY OP**

SCANBODY	PEEK PINS	HEIGHT	TYPE
54.315.186.21-2	49.414.000.01-2	6	A
	49.415.000.01-2	9	A
	49.416.000.01-2	13	A
	49.414.000.02-2	6	B
	49.415.000.02-2	9	B
	49.416.000.02-2	13	B
	49.414.000.03-2	6	C
	49.415.000.03-2	9	C
	49.416.000.03-2	13	C
	49.416.000.04-2	13	D
	49.416.000.05-2	13	E

**SCREWS**

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW		
40.316.008.04-2		



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.303.186.01-2
2	42.303.186.02-2
3	42.303.186.03-2
4	42.303.186.04-2
5	42.303.186.05-2
VIEW COMPONENTS	



ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
1,5/2,9	48.312.186.01-2
2,5/3,9	48.312.186.02-2
3,5/4,9	48.312.186.03-2
VIEW COMPONENTS	



INTERNAL MULTI-UNIT


GH (mm)	NON ENGAGING
2	62.303.186.02-2
3	62.303.186.03-2
4	62.303.186.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O187

LIST OF COMPATIBILITIES AVAILABLE

BEGO

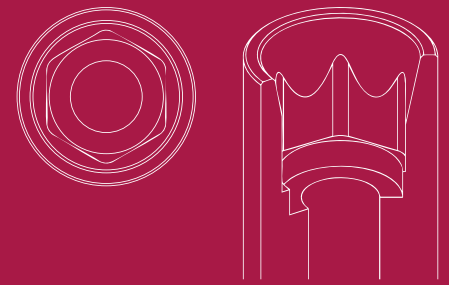


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	25°	31.322.009.01-2	31.312.009.01-2
0,5	25°	25°	31.322.009.02-2	31.312.009.02-2
1	25°	-	31.322.009.03-2	31.312.009.03-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.114.01-2	50.312.187.01-2	43.621.410.01-2
12	52.412.114.01-2		43.624.410.01-2



LAB SCANBODY

30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	25°	33.390.716.01-2	34.612.187.01-2
4		33.490.716.01-2	
6		33.690.716.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation


SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.059.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH O188

LIST OF COMPATIBILITIES **AVAILABLE**
ADIN

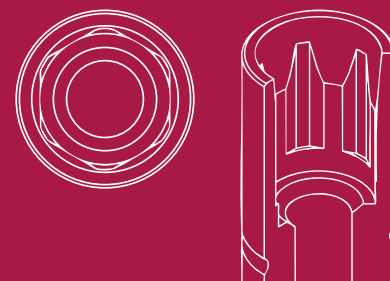

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	45°	-	31.320.188.01-2	31.310.188.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY
10	52.410.128.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.315.078.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O190



LIST OF COMPATIBILITIES **AVAILABLE** DENTIUM

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,8	45°	-	31.320.190.01-2	31.310.190.01-2



LAB SCANBODY

30.410.006.01-2



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.084.02-2	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation


COMPATIBLE WITH O191

LIST OF COMPATIBILITIES **AVAILABLE**
DENTIUM

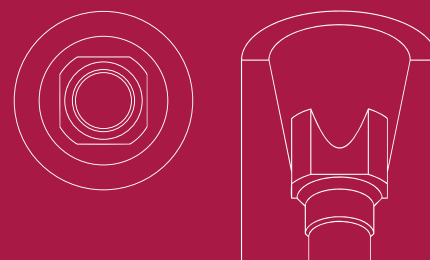

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,8	45°	-	31.322.191.01-2	31.312.191.01-2



LAB SCANBODY
30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.084.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O192

LIST OF COMPATIBILITIES **AVAILABLE**
DENTIUM

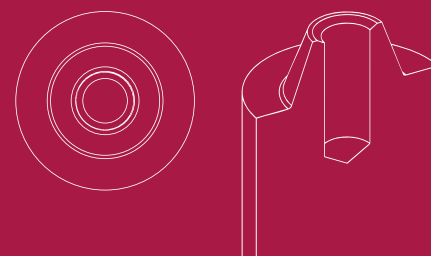

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	-	31.323.192.01-2	-



LAB SCANBODY

30.413.005.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.048.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O193

LIST OF COMPATIBILITIES AVAILABLE

COWELLMEDI - DENTIUM

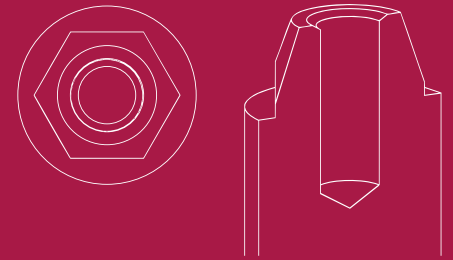

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	-	31.323.193.01-2	-
LAB SCANBODY				
30.413.005.01-2				



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	0°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.613.193.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.193.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	

**SCREWS**


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.051.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2
STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.005.01-2	-	43.601.105.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O195

LIST OF COMPATIBILITIES **AVAILABLE**
ALPHABIO

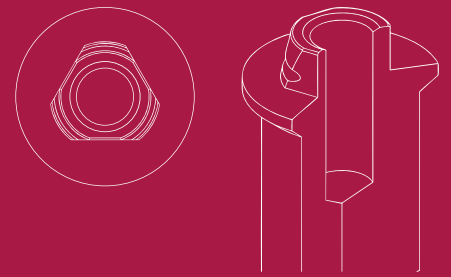

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	-	31.323.195.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,5	30°	25°	25°	31.323.195.21-2	-



LAB SCANBODY

30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.390.716.01-2
4	25°	33.490.716.01-2
6		33.690.716.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.195.31-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
CAPS		HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	

**SCREWS**


DYNAMIC SCREW	HIGH	LENGTH	SCREWDRIVER
41.317.041.01-2	41.317.052.36-2	18	43.618.201.01-2
		24	43.624.201.01-2
		32	43.632.201.01-2



COMPATIBLE WITH O196

LIST OF COMPATIBILITIES AVAILABLE

GC TECH

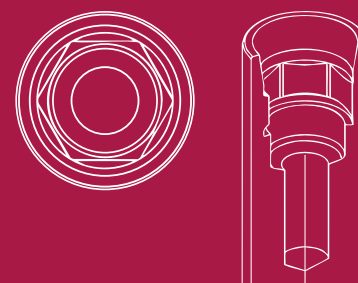

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	40°	-	31.320.196.01-2	31.310.196.01-2
2	25°	-	31.320.196.02-2	31.310.196.02-2
3	25°	-	31.320.196.03-2	31.310.196.03-2



LAB SCANBODY

30.410.006.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.086.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O197

LIST OF COMPATIBILITIES AVAILABLE

GC TECH

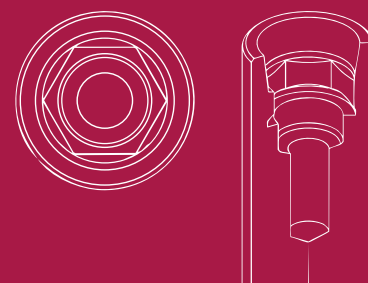

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	35°	25°	31.322.197.01-2	31.312.197.01-2
2	20°	25°	31.322.197.02-2	31.312.197.02-2
3	20°	-	31.322.197.03-2	31.312.197.03-2



LAB SCANBODY

30.412.001.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.086.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O198

LIST OF COMPATIBILITIES AVAILABLE

GC TECH

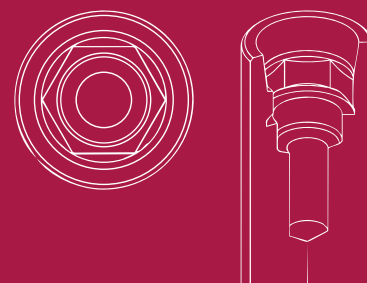

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,2	40°	-	31.324.198.01-2	31.314.198.01-2



LAB SCANBODY

30.414.003.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.316.086.01-2	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O2O5

LIST OF COMPATIBILITIES AVAILABLE

ZIMMER

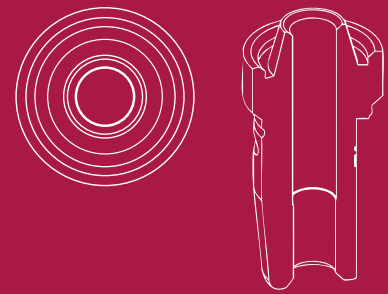


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	-	31.322.205.01-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.312.205.01-2	43.620.411.01-2



LAB SCANBODY

30.412.001.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.390.716.01-2
4	30°	33.490.716.01-2
6		33.690.716.01-2

ANALOG

DIGITAL ANALOG
34.612.205.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.205.31-2	49.414.000.01-2	6	A	43.625.105.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.317.040.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O207

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

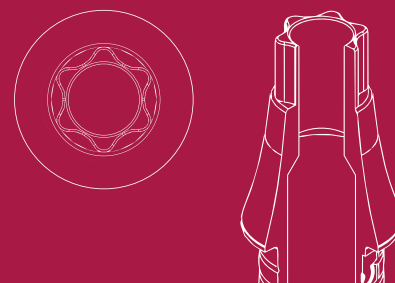

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	35°	15°	31.320.207.01-2	31.310.207.01-2
3	20°	-	31.320.207.03-2	31.310.207.03-2
4	15°	-	31.320.207.04-2	31.310.207.04-2



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
1,5	25°	20°	15°	31.320.207.21-2	31.310.207.21-2
3	20°	15°	10°	31.320.207.23-2	31.310.207.23-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY

30.410.006.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL

ANALOG

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.345.856.01-2*	34.610.207.01-2
4	30°	33.445.856.01-2*	
6		33.645.856.01-2*	

*Only for R



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2.5/3.9	48.312.207.02-2
3.5/4.9	48.312.207.03-2
4.5/5.9	48.312.207.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O2O8

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

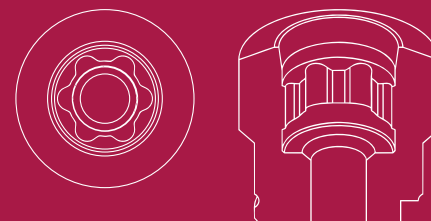


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	45°	20°	31.324.208.01-2	31.314.208.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY

30.414.003.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.345.856.01-2*	34.614.208.01-2
4		33.445.856.01-2*	
6		33.645.856.01-2*	

*Only for R



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2
VIEW COMPONENTS	




ANGULATED MULTI-UNIT 20°

GH (mm)	ENGAGING
2,5/3,9	48.312.207.02-2
3,5/4,9	48.312.207.03-2
4,5/5,9	48.312.207.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O222

LIST OF COMPATIBILITIES **AVAILABLE**
MEGAGEN

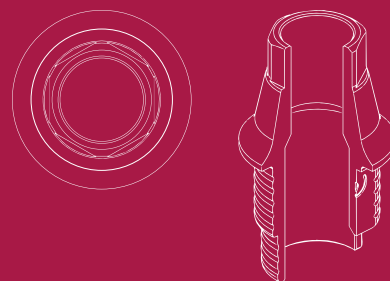

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	30°	-	31.320.222.01-2	31.310.222.01-2
2	25°	-	31.320.222.02-2	31.310.222.02-2
3	20°	-	31.320.222.03-2	31.310.222.03-2



LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.315.604.01-2
4	25°	33.415.604.01-2
6		33.615.604.01-2

ANALOG

DIGITAL ANALOG

34.610.222.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.222.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	




SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.078.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH O223

LIST OF COMPATIBILITIES **AVAILABLE**
MEGAGEN

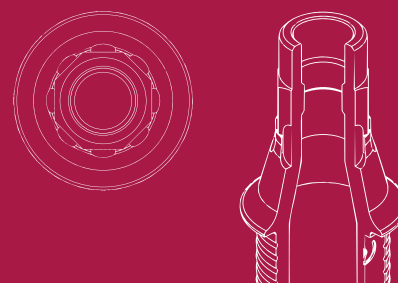

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	30°	-	31.323.223.01-2	31.313.223.01-2
2	25°	15°	31.323.223.02-2	31.313.223.02-2
3	20°	10°	31.323.223.03-2	31.313.223.03-2



LAB SCANBODY

30.413.002.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.315.604.01-2	34.613.223.01-2
4	25°	33.415.604.01-2	
6		33.615.604.01-2	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.223.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	




SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.078.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH O229

LIST OF COMPATIBILITIES **AVAILABLE**
PALTOP

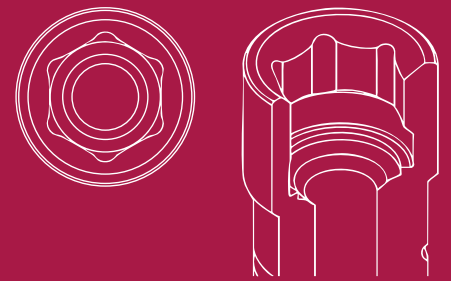

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	40°	-	31.320.229.01-2	31.310.229.01-2



LAB SCANBODY
30.410.006.01-2



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.064.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O236

LIST OF COMPATIBILITIES **AVAILABLE**
ROOTT

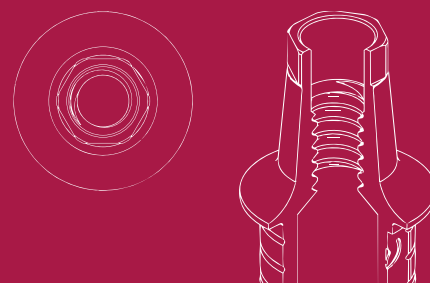

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	20°	25°	31.322.236.01-2	31.312.236.01-2



LAB SCANBODY

30.412.001.01-2



SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.236.21-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.075.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O242

LIST OF COMPATIBILITIES **AVAILABLE**
OXY

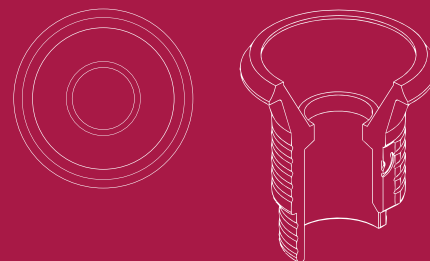

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	40°	-	31.323.242.01-2	-



LAB SCANBODY
30.413.005.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3		33.370.716.01-2
4	25°	33.470.716.01-2
6		33.670.716.01-2

ANALOG

DIGITAL ANALOG
34.613.242.01-2



SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.242.31-2	49.414.000.01-2	6	A	43.601.104.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	



SCREWS


DYNAMIC SCREW	DYNAMIC SCREW Ø2,6	LENGTH	SCREWDRIVER
41.318.045.01-2	41.318.055.01-2 (Direct MU)	18	43.618.201.01-2
41.318.055.01-2 (IMPLANT DIRECT)		24	43.624.201.01-2
		32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O243

LIST OF COMPATIBILITIES **AVAILABLE**
GMI (ILERIMPLANT)

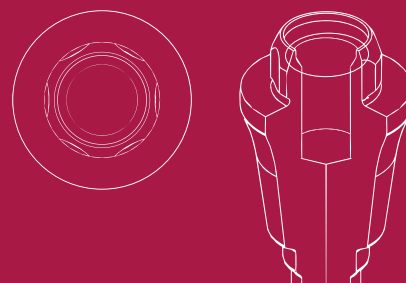

SCREWS

DYNAMIC SCREW	LENTH	SCREWDRIVER
41.316.084.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.003.01-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
2	42.303.243.02-2
3	42.303.243.03-2


[VIEW COMPONENTS](#)



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O245

LIST OF COMPATIBILITIES **AVAILABLE**
C-TECH

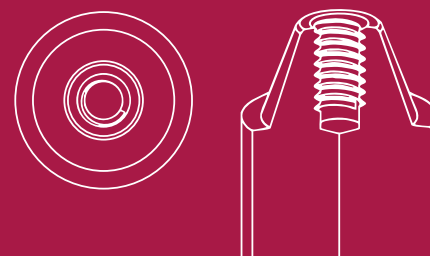

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,6	40°	-	31.323.245.01-2	-



LAB
SCANBODY

30.413.005.01-2



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.314.039.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O246

LIST OF COMPATIBILITIES **AVAILABLE**
C-TECH

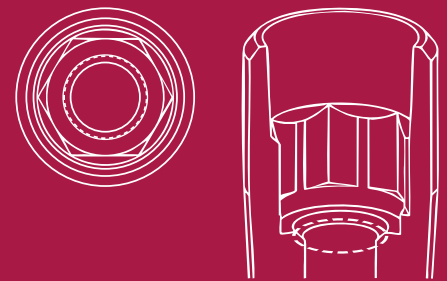

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	25°	-	31.322.246.01-2	31.312.246.01-2
2	25°	-	31.322.246.02-2	31.312.246.02-2
LAB SCANBODY				
30.412.001.01-2				



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O247

LIST OF COMPATIBILITIES **AVAILABLE**
DIO IMPLANTS

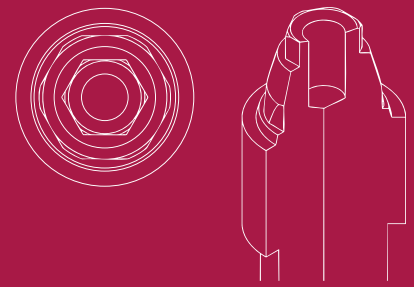

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	40°	-	31.323.247.01-2	-



LAB SCANBODY

30.413.005.01-2



SCANBODY REFERENCE

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.322.247.31-2	49.414.000.01-2	6	A	43.601.103.02-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	
CAPS		HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	


**SCREWS**

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.040.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



COMPATIBLE WITH O249

LIST OF COMPATIBILITIES **AVAILABLE**
MEDENTIS

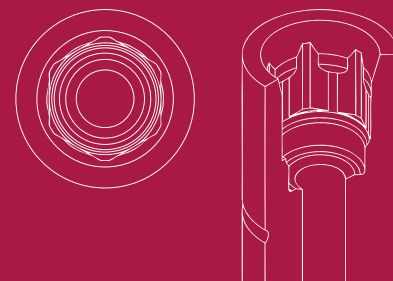


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	40°	-	31.320.249.01-2	31.310.249.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.128.01-2	50.310.249.03-2 (IG=3mm)	43.621.415.01-2



LAB SCANBODY

30.410.006.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3		33.315.804.01-2	34.610.249.01-2
4	25°	33.415.804.01-2	
6		33.615.804.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.080.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.003.08-2	Hex 1,20	43.601.103.02-2



COMPATIBLE WITH O251

LIST OF COMPATIBILITIES **AVAILABLE**
BREDENT MEDICAL

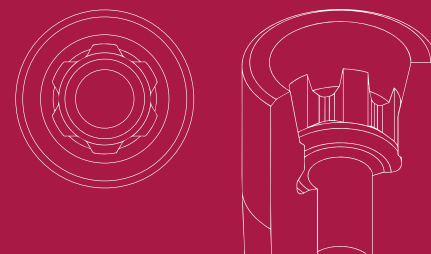

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1	40°	25°	31.322.251.01-2	31.312.251.01-2
1,5	40°	20°	31.322.251.02-2	31.312.251.02-2
3	25°	10°	31.322.251.04-2	31.312.251.04-2



LAB SCANBODY

30.412.001.01-2



ANALOG

DIGITAL ANALOG


34.612.251.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.251.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	

**SCREWS**

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.064.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.01-2	Hex 1,20	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.251.01-2
2	42.302.251.02-2
3	42.302.251.03-2
4	42.302.251.04-2
VIEW COMPONENTS	




INTERNAL MULTI-UNIT

GH (mm)	NON ENGAGING
3	62.302.251.03-2
4	62.302.251.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O257

LIST OF COMPATIBILITIES **AVAILABLE**
BTI

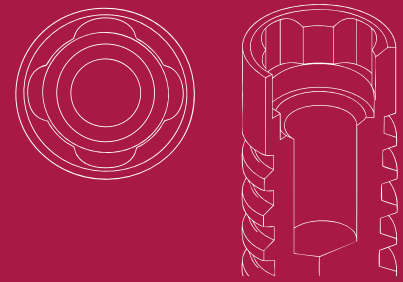

SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.065.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.318.003.01-2	Hex. 1.20	43.601.103.02-2



MULTI-UNIT

STRAIGHT MULTI-UNIT


GH (mm)	NON ENGAGING
1	42.302.257.01-2
2	42.302.257.02-2
3	42.302.257.03-2
4	42.302.257.04-2
VIEW COMPONENTS	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O258

LIST OF COMPATIBILITIES **AVAILABLE**
ASTRA

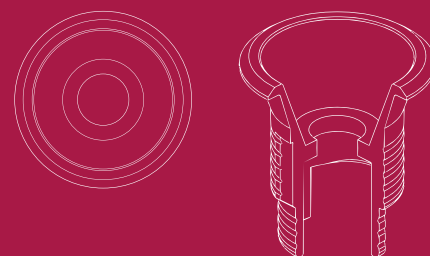

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,3	45°	30°	31.323.025.01-2	-



DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	30°	25°	10°	31.323.025.21-2	-



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
8	52.408.112.01-2	50.313.025.02-2	43.621.410.01-2
10	52.410.111.01-2	50.313.025.01-2	43.624.410.01-2 43.620.411.01-2



LAB SCANBODY	MINI SCANBODY	SCANALOG
30.413.005.01-2	53.413.025.01-2	23.413.025.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

DYNAMIC MILLING TOOL**ANALOG**

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG	ANALOG
3		33.390.716.01-2	34.613.025.01-2	22.613.025.01-2
4	30°	33.490.716.01-2		
6		33.690.716.01-2		

**SCANBODY REFERENCE**

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
	49.414.000.01-2	6	A	
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
54.322.025.31-2	49.416.000.04-2	13	D	43.625.108.01-2
	49.416.000.05-2	13	E	
	CAPS	HEIGHT	TYPE	
	49.418.000.01-2	3,8	Regular	
	49.418.000.02-2	3,8	Wide	
	49.419.000.01-2	6	Regular	
	49.419.000.02-2	6	Wide	
	49.420.000.01-2	8	Regular	
	49.420.000.02-2	8	Wide	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.039.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




STRAIGHT SCREW	TYPE	SCREWDRIVER
40.314.005.04-2	Hex 1,27	43.625.105.01-2



COMPATIBLE WITH O260

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

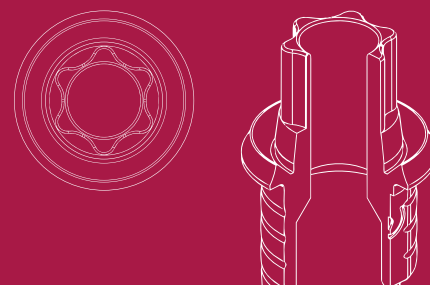


STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	40°	-	31.320.260.01-2	31.310.260.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.410.006.01-2	23.410.260.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.345.856.01-2	34.610.260.01-2
4		33.445.856.01-2	
6		33.645.856.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT

STRAIGHT MULTI-UNIT


GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2
VIEW COMPONENTS	



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm αs = Standard maximum angulation αc = Standard maximum angulation αd = Direct to implant maximum angulation

COMPATIBLE WITH O261

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

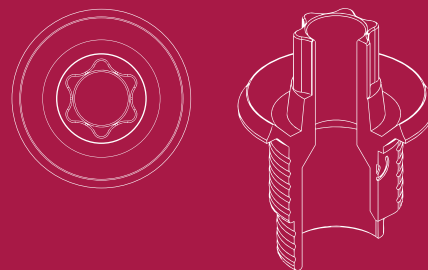

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	40°	-	31.323.261.01-2	31.313.261.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY	SCANALOG
30.413.004.01-2	23.413.261.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL
3	30°	33.345.856.01-2
4		33.445.856.01-2
6		33.645.856.01-2

ANALOG

DIGITAL ANALOG
34.613.261.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O262

LIST OF COMPATIBILITIES **AVAILABLE**
STRAUMANN

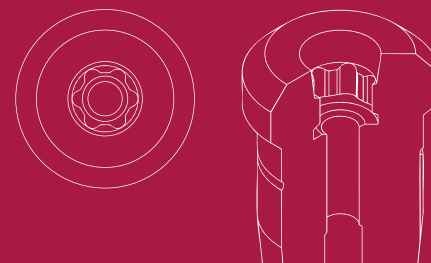

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	40°	-	31.324.262.01-2	31.314.262.01-2



DYNAMIC SCANBODY (LAB/CLIN)

H (mm)	SCANBODY	ADAPTOR	SCREWDRIVER ADAPTOR
10	52.410.103.01-2	50.310.207.03-2 (IG=3mm)	43.621.410.01-2
12	52.412.103.01-2		43.624.410.01-2



LAB SCANBODY

30.414.008.01-2



DYNAMIC MILLING TOOL

SHANK	α_{di}	DYNAMIC MILLING TOOL	DIGITAL ANALOG
3	30°	33.345.856.01-2	34.614.262.01-2
4		33.445.856.01-2	
6		33.645.856.01-2	



ANALOG

LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_{di} = Direct to implant maximum angulation

SCANBODY OP

SCANBODY	PEEK PINS	HEIGHT	TYPE	SCREWDRIVER
54.315.207.21-2	49.414.000.01-2	6	A	43.601.107.01-2
	49.415.000.01-2	9	A	
	49.416.000.01-2	13	A	
	49.414.000.02-2	6	B	
	49.415.000.02-2	9	B	
	49.416.000.02-2	13	B	
	49.414.000.03-2	6	C	
	49.415.000.03-2	9	C	
	49.416.000.03-2	13	C	
	49.416.000.04-2	13	D	
	49.416.000.05-2	13	E	



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.316.066.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



STRAIGHT SCREW	TYPE	SCREWDRIVER
40.316.007.03-2	TORX T6	43.601.107.01-2



MULTI-UNIT


STRAIGHT MULTI-UNIT

GH (mm)	NON ENGAGING
1	42.302.207.01-2
2	42.302.207.02-2
3	42.302.207.03-2
4	42.302.207.04-2
VIEW COMPONENTS	



COMPATIBLE WITH O264

LIST OF COMPATIBILITIES **AVAILABLE**
MEGAGEN

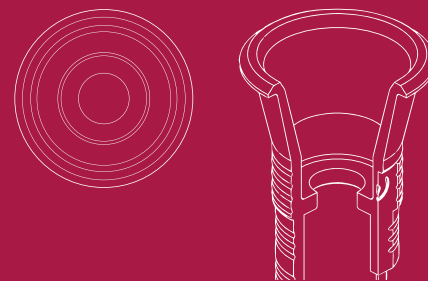

DYNAMIC 3TIBASE

GH (mm)	α_s CH=5mm	α_s CH=7mm	α_s CH=9mm	NON ENGAGING	ENGAGING
0,3	-	25°	25°	31.323.264.21-2	-



MINI SCANBODY

53.413.264.01-2



SCREWS

DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.314.044.02-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2




LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O265

LIST OF COMPATIBILITIES AVAILABLE

ALPHA-DENT - PROTEG IMPLANTS

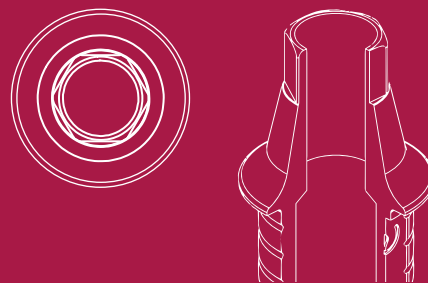

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
1,5	35°	-	31.322.265.03-2	31.312.265.03-2
2	25°	-	31.322.265.04-2	31.312.265.04-2



LAB SCANBODY

30.412.001.01-2



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.318.079.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O266

LIST OF COMPATIBILITIES **AVAILABLE**
TBR

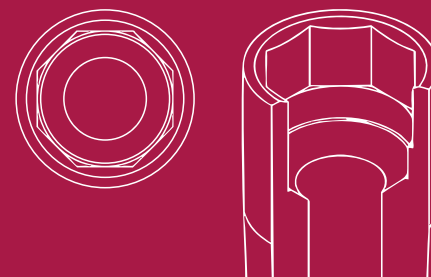

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	35°	-	31.320.266.01-2	31.310.266.01-2
2	25°	-	31.320.266.04-2	31.310.266.04-2



LAB SCANBODY

30.410.006.01-2



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.068.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O267

LIST OF COMPATIBILITIES **AVAILABLE**
TBR

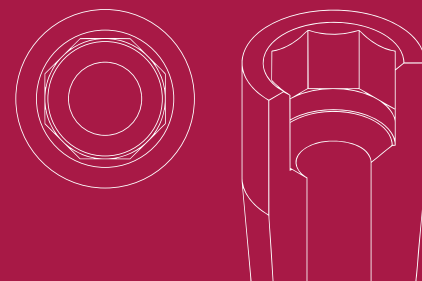

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	40°	-	31.322.267.01-2	31.312.267.01-2



LAB SCANBODY

30.412.001.01-2



SCREWS


DYNAMIC SCREW	LENGTH	SCREWDRIVER
	18	43.618.201.01-2
41.320.068.01-2	24	43.624.201.01-2
	32	43.632.201.01-2



LIBRARY OPTIONS: GH = Gingival Height CH = Cement Height H = Height IG = Adaptor 3mm α_s = Standard maximum angulation α_c = Standard maximum angulation α_d = Direct to implant maximum angulation

COMPATIBLE WITH O268

LIST OF COMPATIBILITIES **AVAILABLE**
TBR

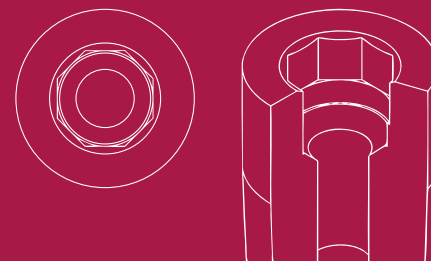

STANDARD DYNAMIC TIBASE

GH (mm)	α_s	α_c	NON ENGAGING	ENGAGING
0,5	45°	-	31.323.268.01-2	31.313.268.01-2



LAB SCANBODY


30.413.002.01-2




SCREWS



DYNAMIC SCREW	LENGTH	SCREWDRIVER
41.320.068.01-2	18	43.618.201.01-2
	24	43.624.201.01-2
	32	43.632.201.01-2



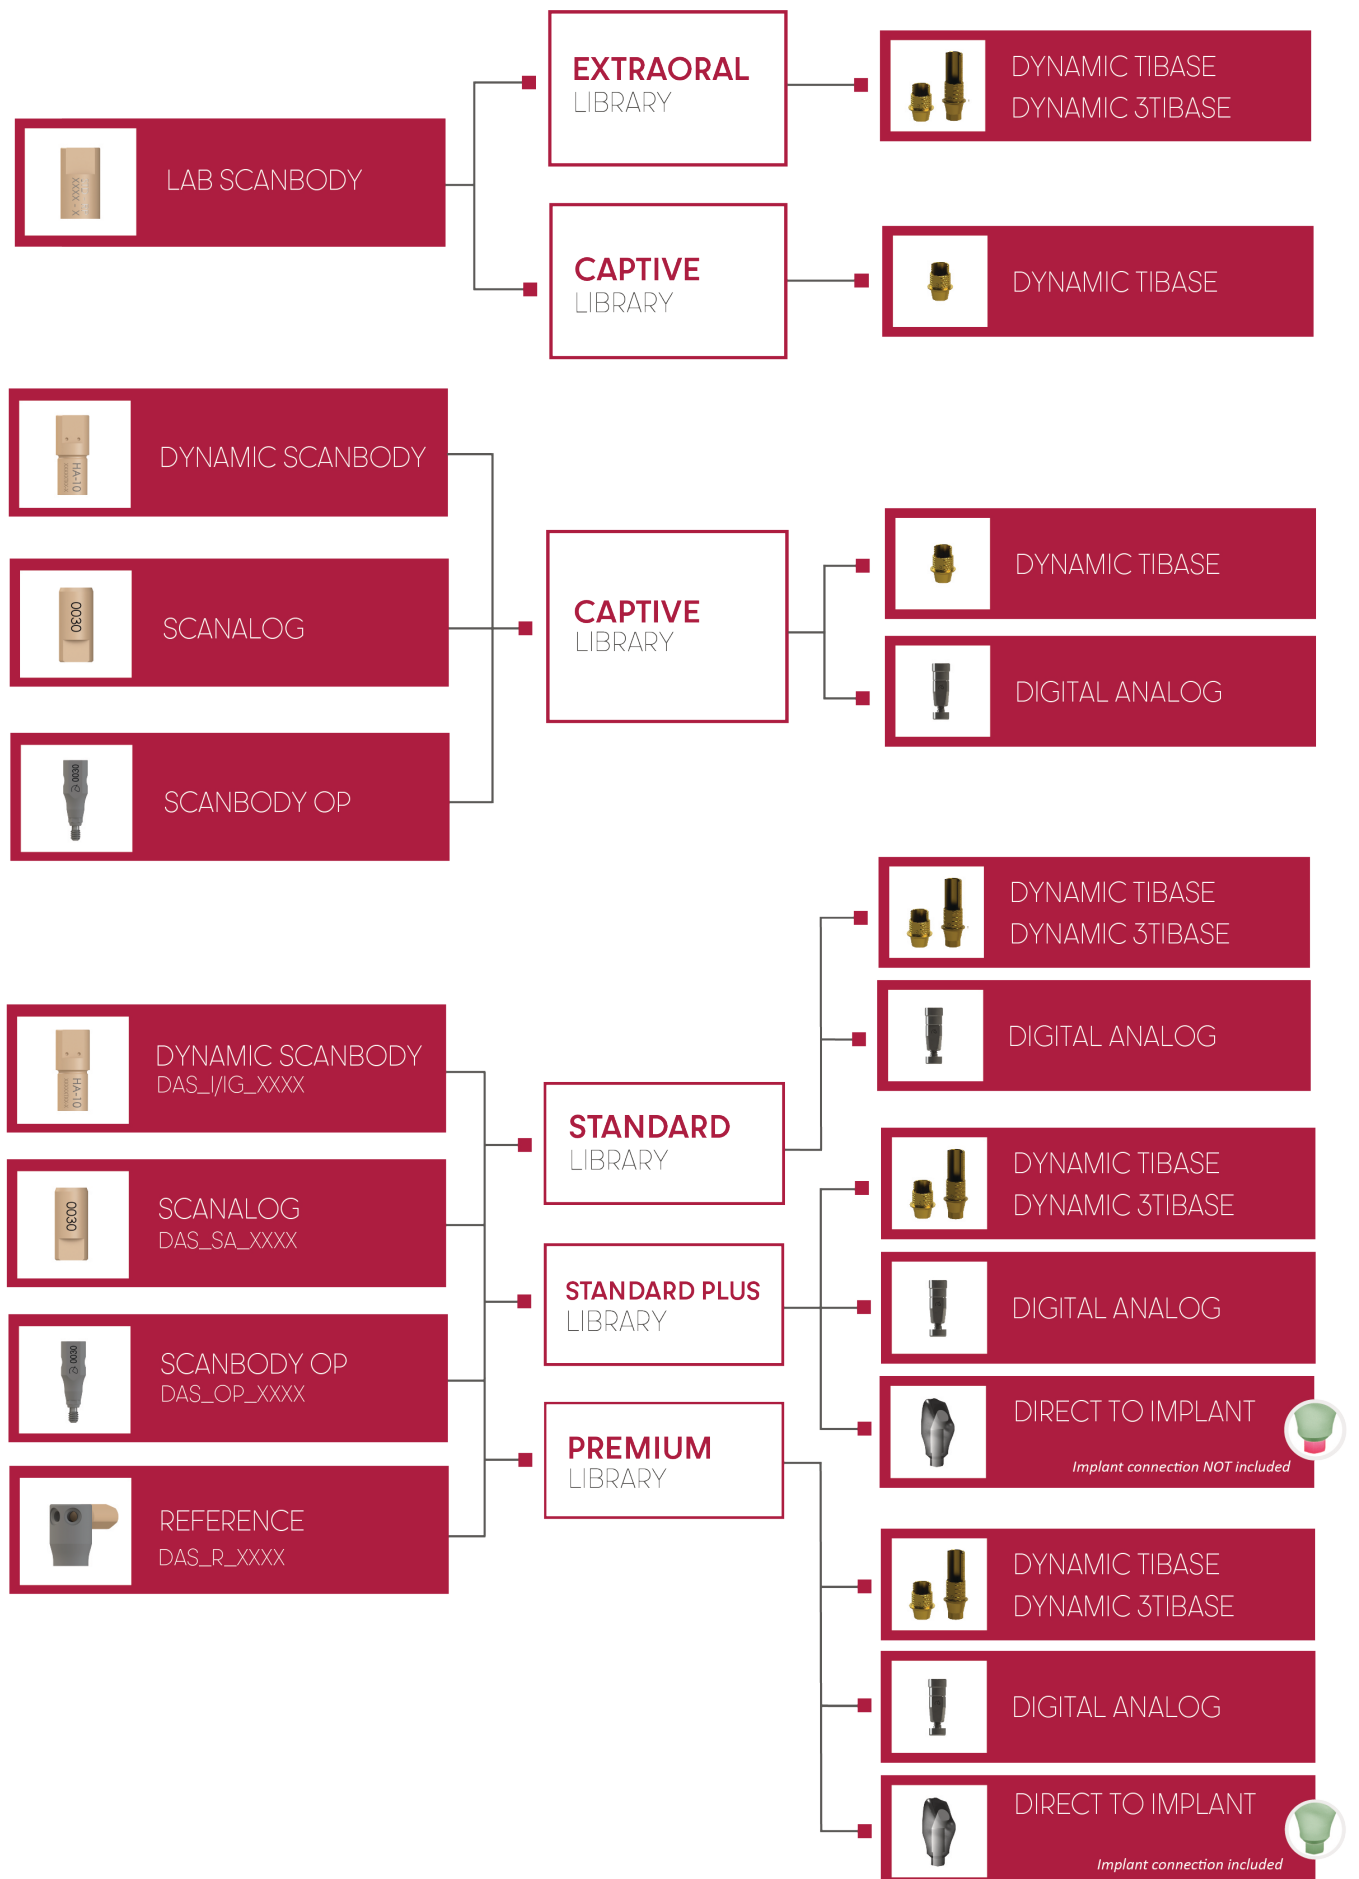

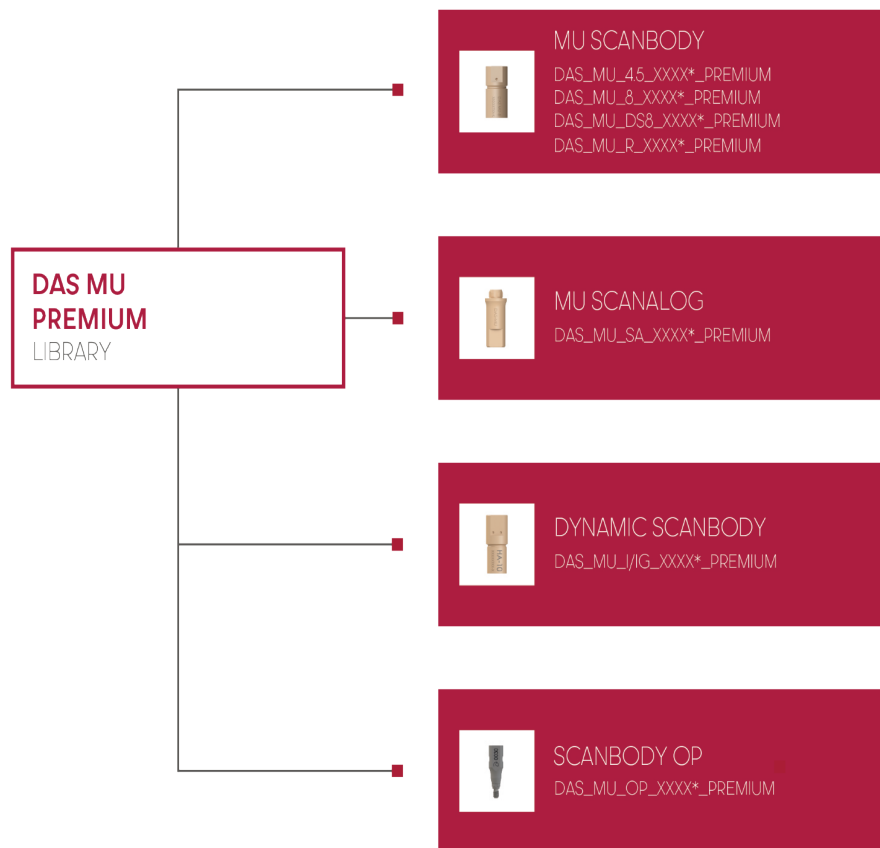

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS
STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

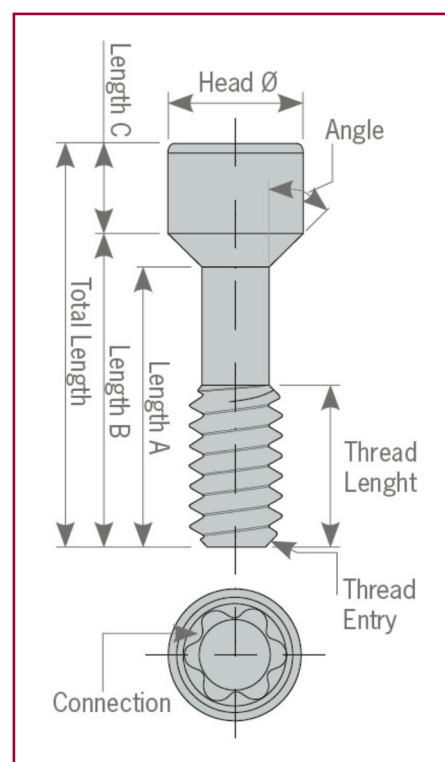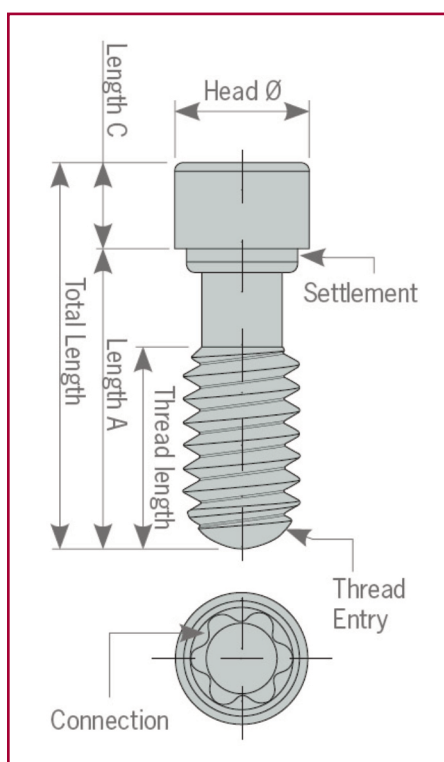

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS



REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.314.039.01-2	1.4	15 Ncm	3.9	1.8	2.1	-	1.8	2.4	straight	-	45° Chamfer	Hexalobular 1.70
41.314.040.02-2	1.4	15 Ncm	4	1.7	2.25	2.7	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.314.043.01-2	1.4	15 Ncm	4.3	1.8	2.03	2.9	1.4	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.044.01-2	1.4	15 Ncm	4.4	2.15	2.73	3	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.314.046.01-2	1.4	15 Ncm	4.6	2.5	2.5	3.17	1.43	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.064.01-2	1.4	15 Ncm	6.4	2.2	4.21	5.15	1.25	2.3	conical	25°	45° Chamfer	Hexalobular 1.70
41.314.067.02-2	1.4	15 Ncm	6.7	2.5	4.71	5.5	1.2	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.070.01-2	1.4	15 Ncm	7	2.3	5.39	5.65	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.314.074.01-2	1.4	15 Ncm	7.4	3.55	5	5.99	1.41	2.3	conical	25°	45° Chamfer	Hexalobular 1.70
41.314.076.01-2	1.4	15 Ncm	7.6	2.4	5.88	6.35	1.25	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.314.080.01-2	1.4	15 Ncm	8	2.1	4.96	6.8	1.2	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.314.084.01-2	1.4	15 Ncm	8.4	2.5	5.92	6.85	1.55	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.314.105.01-2	1.4	15 Ncm	10.5	2.31	5	5.45	5.05	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.315.078.01-2	No-80	15 Ncm	7.8	2.45	5.77	6	1.8	2.3	conical	65°	45° Chamfer	Hexalobular 1.70
41.316.040.01-2	1.6	20 Ncm	4	2.07	2.3	2.47	1.53	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.048.01-2	1.6	20 Ncm	4.8	2.6	2.93	3.5	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.048.02-2	1.6	20 Ncm	4.8	2.85	3	3.58	1.22	2.3	conical	31°	45° Chamfer	Hexalobular 1.70
41.316.064.01-2	1.6	20 Ncm	6.4	3.15	4.7	5	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.064.02-2	1.6	20 Ncm	6.4	1.6	4.08	5.48	0.92	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.316.066.01-2	1.6	20 Ncm	6.6	1.95	4.78	5.2	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.071.01-2	1.6	20 Ncm	7.1	2.8	5.2	5.54	1.56	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.072.01-2	1.6	20 Ncm	7.2	3.5	5.2	5.82	1.38	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.316.073.01-2	1.6	20 Ncm	7.3	2.2	4.71	5.56	1.74	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.316.076.01-2	1.6	20 Ncm	7.6	3.5	6.1	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.316.078.01-2	1.6	20 Ncm	7.84	2.2	5.51	7.04	0.8	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.316.079.01-2	1.6	20 Ncm	7.9	2.30	5.42	6.60	1.3	2.3	conical	20°	45° Chamfer	Hexalobular 1.70
41.316.080.01-2	1.6	20 Ncm	8	3	6.3	6.51	1.49	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.316.081.01-2	1.6	20 Ncm	8.1	3	6.35	6.73	1.37	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.084.01-2	1.6	20 Ncm	8.4	3.5	6.8	-	1.6	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.316.084.02-2	1.6	20 Ncm	8.4	2.7	5.85	6.85	1.55	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.316.086.01-2	1.6	20 Ncm	8.6	3	7.2	-	1.4	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.316.094.01-2	1.6	20 Ncm	9.4	2.9	7.62	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.316.108.01-2	1.6	20 Ncm	10.8	2.2	4.72	5.56	5.24	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.316.115.01-2	1.6	20 Ncm	11.5	3.5	5.2	5.82	5.68	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.316.118.01-2	1.6	20 Ncm	11.8	3.5	6.1	-	5.7	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.316.124.01-2	1.6	20 Ncm	12.4	2.2	5.55	7.05	5.35	2.3	conical	15°	45° Chamfer	Hexalobular 1.70
41.316.132.01-2	1.6	20 Ncm	13.2	2.9	7.63	8	5.2	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.317.040.01-2	N1-72	25 Ncm	4	2.1	2.5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.317.041.01-2	N1-72	25 Ncm	4.1	1.9	2.3	2.47	1.63	2.3	conical	55°	45° Chamfer	Hexalobular 1.70
41.317.065.01-2	N1-72	25 Ncm	6.5	2.4	4.7	5.18	1.33	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.317.073.01-2	N1-72	25 Ncm	7.3	2.5	5.5	5.77	1.53	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.317.106.01-2	N1-72	25 Ncm	10.6	2.8	5.54	5.65	4.95	2.3	conical	70°	Semi-sphere	Hexalobular 1.70
41.318.043.01-2	1.8	25 Ncm	4.3	2	2.52	2.7	1.6	2.3	conical	55°	45° Chamfer	Hexalobular 1.70
41.318.044.01-2	1.8	25 Ncm	4.4	2.75	3	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.318.045.01-2	1.8	25 Ncm	4.5	2.3	2.81	2.9	1.6	2.3	conical	70°	45° Chamfer	Hexalobular 1.70
41.318.051.01-2	1.8	25 Ncm	5.1	2.7	3.55	3.7	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.064.01-2	1.8	25 Ncm	6.4	3.45	4.7	5.1	1.3	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.318.065.01-2	1.8	25 Ncm	6.5	2.83	5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.318.067.01-2	1.8	25 Ncm	6.7	2.35	4.93	5.4	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.318.068.01-2	1.8	25 Ncm	6.8	4	5.25	5.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.071.01-2	1.8	25 Ncm	7.1	2.6	5.54	5.65	1.45	2.3	conical	70°	45° Chamfer	Hexalobular 1.70
41.318.074.01-2	1.8	25 Ncm	7.4	3.8	5.8	6.04	1.36	2.3	conical	50°	45° Chamfer	Hexalobular 1.70
41.318.075.01-2	1.8	25 Ncm	7.5	3.3	6.1	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.318.076.01-2	1.8	25 Ncm	7.6	2.52	5.73	6.2	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.318.077.01-2	1.8	25 Ncm	7.7	2.5	5.59	6.5	1.2	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.318.077.02-2	1.8	25 Ncm	7.7	2.2	6.08	6.35	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.080.01-2	1.8	25 Ncm	8	4	6.5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.318.083.01-2	1.8	25 Ncm	8.3	4.25	6.79	6.95	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.048.01-2	2	25 Ncm	4.8	2.7	3.3	3.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.051.01-2	2	25 Ncm	5.1	3.1	3.6	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.060.01-2	2	25 Ncm	6	2.7	4.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.065.01-2	2	25 Ncm	6.5	2.7	5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.320.068.01-2	2	25 Ncm	6.8	4.4	5.3	5.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.090.01-2	2	25 Ncm	9	4	7.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.094.01-2	2	25 Ncm	9.4	3	7.84	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70

DYNAMIC SCREWS TECHNICAL SPECIFICATIONS



REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.320.117.01-2	2	25 N·cm	11.7	2.75	5.91	6.18	5.52	2.3	conical	35°	Semi-sphere	Hexalobular 1.70
41.320.125.01-2	2	25 N·cm	12.5	3.3	6.33	6.5	6	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.320.129.01-2	2	25 N·cm	12.9	4.7	6.7	-	6.2	2.4	straight	-	Semi-sphere	Hexalobular 1.70
41.320.137.01-2	2	25 N·cm	13.7	4	7.5	-	6.2	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.325.067.01-2	2.5	25 N·cm	6.7	4.6	5.1	-	1.6	2.85	straight	-	Semi-sphere	Hexalobular 1.70
41.318.051.01-2	1.8	25 N·cm	5.1	2.7	3.55	3.7	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.051.02-2	1.8	25 N·cm	5.1	2.7	3.38	3.65	1.45	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.318.064.01-2	1.8	25 N·cm	6.4	3.45	4.7	5.1	1.3	2.3	conical	35°	45° Chamfer	Hexalobular 1.70
41.318.067.01-2	1.8	25 N·cm	6.7	2.35	4.93	5.4	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.318.069.01-2	1.8	25 N·cm	6.9	3.5	5.4	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.318.070.01-2	1.8	25 N·cm	7	3.4	5.303	5.7	1.3	2.3	conical	-	45° Chamfer	Hexalobular 1.70
41.318.071.01-2	1.8	25 N·cm	7.1	2.6	5.54	5.65	1.45	2.3	conical	70°	45° Chamfer	Hexalobular 1.70
41.318.074.01-2	1.8	25 N·cm	7.4	3.8	5.8	6.04	1.36	2.3	conical	50°	45° Chamfer	Hexalobular 1.70
41.318.076.01-2	1.8	25 N·cm	7.6	2.52	5.73	6.2	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.318.077.01-2	1.8	25 N·cm	7.7	2.5	5.59	6.5	1.2	2.3	conical	30°	45° Chamfer	Hexalobular 1.70
41.318.079.01-2	1.8	25 N·cm	7.9	4	6.34	6.5	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.080.01-2	1.8	25 N·cm	8	4	6.5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.318.083.01-2	1.8	25 N·cm	8.3	4.25	6.79	6.95	1.35	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.111.01-2	1.8	25 N·cm	11.1	2.2	6.06	6.35	4.75	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.318.122.01-2	1.8	25 N·cm	12.2	3.8	5.8	6	6.2	2.3	conical	50°	45° Chamfer	Hexalobular 1.70
41.320.038.01-2	2	25 N·cm	3.81	2.35	2.35	2.42	1.39	2.35	conical	70°	45° Chamfer	Hexalobular 1.70
41.320.039.01-2	2	25 N·cm	3.9	1.9	2.41	2.5	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.042.01-2	2	25 N·cm	4.2	2.2	3.1	-	1.1	2.315	straight	-	30° Chamfer	Hexalobular 1.70
41.320.043.01-2	2	25 N·cm	4.3	2	2.5	-	1.8	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.320.044.01-2	2	25 N·cm	4.4	2.45	2.95	3.1	1.3	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.320.047.01-2	2	25 N·cm	4.7	3	3.3	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.048.01-2	2	25 N·cm	4.8	2.7	3.3	3.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.050.01-2	2	25 N·cm	5	2.8	3.35	3.6	1.4	2.3	conical	31°	Semi-sphere	Hexalobular 1.70
41.320.050.02-2	2	25 N·cm	5	3	3.5	-	1.5	1.5	straight	-	45° Chamfer	Hexalobular 1.70
41.320.051.01-2	2	25 N·cm	5.1	3.1	3.6	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.052.01-2	2	25 N·cm	5.2	3	3.7	-	1.5	2.6	straight	-	30° Chamfer	Hexalobular 1.70
41.320.060.01-2	2	25 N·cm	6	2.7	4.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.065.01-2	2	25 N·cm	6.5	2.7	5	-	1.5	2.3	straight	-	45° Chamfer	Hexalobular 1.70
41.320.067.01-2	2	25 N·cm	6.7	2.3	3.59	5.7	1	2.58	conical	15°	45° Chamfer	Hexalobular 1.70
41.320.068.01-2	2	25 N·cm	6.8	4.4	5.3	5.4	1.4	2.3	conical	60°	45° Chamfer	Hexalobular 1.70
41.320.070.01-2	2	25 N·cm	7	3	5.6	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.071.01-2	2	25 N·cm	7.1	4	5.11	5.55	1.55	2.3	conical	20°	45° Chamfer	Hexalobular 1.70
41.320.074.01-2	2	25 N·cm	7.4	3.3	6	-	1.4	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.075.01-2	2	25 N·cm	7.5	2.75	5.9	6.19	1.31	2.3	conical	35°	Semi-sphere	Hexalobular 1.70
41.320.079.01-2	2	25 N·cm	7.9	3.3	6.32	6.5	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.320.081.01-2	2	25 N·cm	8.1	4.6	5.53	5.8	2.3	2.3	conical	65°	45° Chamfer	Hexalobular 1.70
41.320.082.01-2	2	25 N·cm	8.2	4.7	6.7	-	1.5	2.4	straight	-	Semi-sphere	Hexalobular 1.70
41.320.090.01-2	2	25 N·cm	9	4	7.5	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.094.01-2	2	25 N·cm	9.4	3	7.84	8	1.4	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.320.094.02-2	2	25 N·cm	9.4	3	7.9	-	1.5	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.320.117.01-2	2	25 N·cm	11.7	2.75	5.91	6.18	5.52	2.3	conical	35°	Semi-sphere	Hexalobular 1.70
41.320.125.01-2	2	25 N·cm	12.5	3.3	6.33	6.5	6	2.3	conical	45°	45° Chamfer	Hexalobular 1.70
41.320.129.01-2	2	25 N·cm	12.9	4.7	6.7	-	6.2	2.4	straight	-	Semi-sphere	Hexalobular 1.70
41.320.137.01-2	2	25 N·cm	13.7	4	7.5	-	6.2	2.3	straight	-	Semi-sphere	Hexalobular 1.70
41.325.054.01-2	2.5	25 N·cm	5.4	4.6	4.1	-	1.3	2.865	straight	-	Semi-sphere	Hexalobular 1.70
41.325.067.01-2	2.5	25 N·cm	6.7	4.6	5.1	-	1.6	2.85	straight	-	Semi-sphere	Hexalobular 1.70

STRARICHT SCREWS TECHNICAL SPECIFICATIONS



REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.312.003.01-2	1.2	0.25	15 N·cm	7.85	2.7	6.2	6.55	1.3	1.9	conical	45° Chamfer	Hex. 1.20
40.314.003.01-2	1.4	0.3	15 N·cm	3.9	1.91	2.1	-	1.8	2.4	straight	45° Chamfer	Hex. 1.20
40.314.003.02-2	1.4	0.3	15 N·cm	4	2	2.2	-	1.8	2.3	straight	45° Chamfer	Hex. 1.20
40.314.003.03-2	1.4	0.3	15 N·cm	7.6	2.4	6.05	6.3	1.3	1.9	conical	45° Chamfer	Hex. 1.20
40.314.003.04-2	1.4	0.3	15 N·cm	7.5	2.5	5.45	5.7	1.8	1.85	conical	45° Chamfer	Hex. 1.20
40.314.003.05-2	1.4	0.3	15 N·cm	5.3	1.34	3.7	-	1.6	2.1	straight	30° Chamfer	Hex. 1.25
40.314.004.01-2	1.4	0.3	15 N·cm	6.3	2.2	4.6	5.1	1.2	2.1	conical	30° Chamfer	Hex. 1.25
40.314.005.01-2	1.4	0.3	15 N·cm	7.6	3.6	5.21	6	1.6	2.15	conical	45° Chamfer	Hex. 1.27
40.314.005.02-2	1.4	0.3	15 N·cm	7.5	2.4	5.5	5.7	1.8	2.1	conical	45° Chamfer	Hex. 1.27
40.314.005.04-2	1.4	0.3	15 N·cm	4	1.7	2.25	-	1.75	2.1	straight	45° Chamfer	Hex. 1.27
40.314.007.01-2	1.4	0.3	15 N·cm	4	1.8	2.01	2.8	1.2	2.2	conical	45° Chamfer	Torx T6
40.314.007.02-2	1.4	0.3	15 N·cm	7	2.1	6.2	2.25	0.8	2.1	conical	45° Chamfer	Torx T6
40.314.007.03-2	1.4	0.3	15 N·cm	5.1	1.1	3.35	3.9	1.2	2.1	conical	45° Chamfer	Torx T6
40.314.008.01-2	1.4	0.3	15 N·cm	3.6	1.8	2.1	-	1.5	2.1	straight	45° Chamfer	Unigrip
40.314.008.02-2	1.4	0.3	15 N·cm	6.7	2.5	4.87	5.3	1.4	1.8	conical	45° Chamfer	Unigrip
40.314.008.03-2	1.4	0.3	15 N·cm	6.65	1.6	3.65	5.75	0.9	2.95	conical	45° Chamfer	Unigrip
40.314.008.04-2	1.4	0.3	15 N·cm	4.8	1.1	3.05	3.6	1.2	2.1	conical	45° Chamfer	Unigrip
40.314.012.01-2	1.4	0.3	15 N·cm	4.5	1.7	2.01	2.4	2.1	2.15	conical	45° Chamfer	Star 1.50
40.314.014.01-2	1.4	0.3	15 N·cm	4.45	2.3	2.48	-	1.97	2.16	straight	45° Chamfer	Hex. 1.19
40.315.008.01-2	No-80	0.317	15 N·cm	8.3	2.45	5.79	5.95	2.35	2	conical	45° Chamfer	Unigrip
40.316.002.01-2	1.6	0.35	20 N·cm	7	2.79	4.86	5.44	1.56	2.3	conical	45° Chamfer	Cuad. 1.30
40.316.002.02-2	1.6	0.35	20 N·cm	9.3	3.3	7.3	-	2	2.3	straight	Semi-sphere	Cuad. 1.30
40.316.003.01-2	1.6	0.35	20 N·cm	8.4	2.5	6.6	-	1.8	2	straight	45° Chamfer	Hex. 1.20
40.316.003.02-2	1.6	0.35	20 N·cm	10.2	2	7.88	8.2	2	2.2	conical	45° Chamfer	Hex. 1.20
40.316.004.02-2	1.6	0.35	20 N·cm	8.8	3	6.73	7	1.8	2.1	conical	45° Chamfer	Hex. 1.25
40.316.004.03-2	1.6	0.35	20 N·cm	6.9	2.2	5.02	5.2	1.7	1.92	conical	45° Chamfer	Hex. 1.25
40.316.005.01-2	1.6	0.35	20 N·cm	7.5	3.6	5.44	5.9	1.6	2.13	conical	45° Chamfer	Hex. 1.27
40.316.005.02-2	1.6	0.35	20 N·cm	8.25	3	6.25	-	2	2.33	straight	45° Chamfer	Hex. 1.27
40.316.005.03-2	1.6	0.35	20 N·cm	8.25	3.03	6.25	-	2	2.45	straight	45° Chamfer	Hex. 1.27
40.316.005.04-2	1.6	0.35	20 N·cm	10.5	3.2	8.15	8.4	2.1	2.1	conical	45° Chamfer	Hex. 1.27
40.316.005.05-2	1.6	0.35	20 N·cm	7.6	2.7	5.21	5.5	2.1	2.1	conical	45° Chamfer	Hex. 1.27
40.316.005.06-2	1.6	0.35	20 N·cm	3.8	1.8	2.2	-	1.6	2.1	straight	45° Chamfer	Hex. 1.27
40.316.005.07-2	1.6	0.35	20 N·cm	8.8	2.85	6.73	6.9	1.9	2.15	conical	45° Chamfer	Hex. 1.27
40.316.005.08-2	1.6	0.35	20 N·cm	9	3.9	6.49	6.9	2.1	2.18	conical	45° Chamfer	Hex. 1.27
40.316.005.09-2	1.6	0.35	20 N·cm	8.5	1.6	6.46	7	1.5	2.2	conical	45° Chamfer	Hex. 1.27
40.316.007.01-2	1.6	0.35	20 N·cm	7.9	2	5.63	6.9	1	2.18	conical	45° Chamfer	Torx T6
40.316.007.02-2	1.6	0.35	20 N·cm	9	1.6	6.96	7.5	1.5	2.2	conical	45° Chamfer	Torx T6
40.316.008.02-2	1.6	0.35	20 N·cm	7.3	2.7	5.15	5.9	1.4	2.2	conical	45° Chamfer	Unigrip
40.316.008.03-2	1.6	0.35	20 N·cm	8.5	1.6	6.46	7	1.5	2.2	conical	45° Chamfer	Unigrip
40.316.012.01-2	1.6	0.35	20 N·cm	8	2.65	5.53	6	2	2.15	conical	45° Chamfer	Star 1.50
40.316.014.01-2	1.6	0.35	20 N·cm	7.9	2.3	5.42	6.46	1.44	2.2	conical	45° Chamfer	Hex. 1.19
40.317.002.01-2	N1-72	0.353	25 N·cm	8.17	3	5.31	5.87	2.3	2.4	conical	45° Chamfer	Cuad. 1.30
40.317.004.01-2	N1-72	0.353	25 N·cm	7.6	2.8	5.6	5.77	1.83	2.3	conical	45° Chamfer	Hex. 1.27
40.317.005.01-2	N1-72	0.353	25 N·cm	7.6	2.15	5.17	5.4	2.2	2.2	conical	45° Chamfer	Hex. 1.27
40.317.005.02-2	N1-72	0.353	25 N·cm	7.3	2.4	4.73	5.25	2.05	2.4	conical	45° Chamfer	Hex. 1.27
40.318.002.01-2	1.8	0.35	25 N·cm	7	3.2	5.2	-	1.8	2.5	straight	45° Chamfer	Cuad. 1.30
40.318.002.02-2	1.8	0.35	25 N·cm	8.3	2.6	6.6	-	1.7	2.45	straight	45° Chamfer	Cuad. 1.30
40.318.003.01-2	1.8	0.35	25 N·cm	6.8	3.3	5.2	-	1.6	2.3	straight	45° Chamfer	Hex. 1.20
40.318.003.02-2	1.8	0.35	25 N·cm	8	3.6	6	-	2	2.1	straight	45° Chamfer	Hex. 1.20
40.318.004.01-2	1.8	0.35	25 N·cm	7.2	4.8	5.36	5.9	1.3	2.4	conical	45° Chamfer	Hex. 1.25
40.318.004.02-2	1.8	0.35	25 N·cm	9.8	5.8	7.96	8.5	1.3	2.4	conical	45° Chamfer	Hex. 1.25
40.318.004.03-2	1.8	0.35	25 N·cm	7.65	3.3	5.17	5.75	1.9	2.4	conical	45° Chamfer	Hex. 1.25
40.318.005.01-2	1.8	0.35	25 N·cm	4.5	2.3	2.8	2.9	1.6	2.33	conical	45° Chamfer	Hex. 1.27
40.318.005.02-2	1.8	0.35	25 N·cm	7.6	3.6	5.76	6	1.6	2.33	conical	45° Chamfer	Hex. 1.27
40.318.005.03-2	1.8	0.35	25 N·cm	8.5	1.6	6.56	7	1.5	2.2	conical	45° Chamfer	Hex. 1.27
40.318.005.04-2	1.8	0.35	25 N·cm	5.2	1.6	3.41	3.8	1.4	2.2	conical	45° Chamfer	Hex. 1.27
40.318.006.01-2	1.8	0.35	25 N·cm	6	3	3.67	4	2	2.4	conical	45° Chamfer	Hex. 1.70
40.318.007.01-2	1.8	0.35	25 N·cm	9.1	4.25	7.32	7.45	1.65	2.18	conical	45° Chamfer	Torx T6
40.318.008.01-2	1.8	0.35	25 N·cm	8.3	2.5	6.5	-	1.8	2.45	straight	45° Chamfer	Unigrip
40.318.012.01-2	1.8	0.35	25 N·cm	7.25	2.4	4.93	5.25	2	2.15	conical	45° Chamfer	Star 1.50
40.318.012.02-2	1.8	0.35	25 N·cm	8	2.6	5.68	6	2	2.15	conical	45° Chamfer	Star 1.50

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.318.013.01-2	1.8	0.35	25 N-cm	7.7	2.5	5.7	6.4	1.3	2.2	conical	45° Chamfer	Hex. 1.00
40.320.002.01-2	2	0.4	30 N-cm	4.9	3.26	3.26	3.5	1.4	2.49	conical	45° Chamfer	Cuad. 1.30
40.320.002.02-2	2	0.4	30 N-cm	7.45	3	5.7	5.9	1.5	2.4	conical	45° Chamfer	Cuad. 1.30
40.320.002.03-2	2	0.4	30 N-cm	10.2	3.15	8.4	-	1.8	2.45	straight	45° Chamfer	Cuad. 1.30
40.320.003.01-2	2	0.4	30 N-cm	4.7	3	3.33	-	1.37	2.35	straight	45° Chamfer	Hex. 1.20
40.320.003.02-2	2	0.4	30 N-cm	7	3.25	5	-	2	2.4	straight	45° Chamfer	Hex. 1.20
40.320.003.03-2	2	0.4	30 N-cm	7.9	3.7	5.55	6.05	1.85	2.4	conical	45° Chamfer	Hex. 1.20
40.320.003.04-2	2	0.4	30 N-cm	8.4	2.75	5.68	6.35	2.05	2.3	conical	45° Chamfer	Hex. 1.20
40.320.003.05-2	2	0.4	30 N-cm	4.8	3.3	3.65	3.9	0.9	2.45	conical	45° Chamfer	Hex. 1.20
40.320.003.06-2	2	0.25	25 N-cm	4	2	2.5	-	1.5	2.3	straight	30° Chamfer	Hex. 1.20
40.320.003.07-2	2	0.25	25 N-cm	8.5	1.6	6.63	7	1.5	2.2	conical	45° Chamfer	Hex. 1.20
40.320.005.01-2	2	0.4	30 N-cm	7.6	3.7	6	-	1.6	2.33	straight	45° Chamfer	Hex. 1.27
40.320.005.02-2	2	0.4	30 N-cm	10.3	4	8.3	-	2	2.45	straight	45° Chamfer	Hex. 1.27
40.320.005.03-2	2	0.4	30 N-cm	10.3	3.5	8.3	-	2	2.33	straight	45° Chamfer	Hex. 1.27
40.320.005.04-2	2	0.4	30 N-cm	10.5	3.2	8.15	8.4	2.1	2.5	conical	45° Chamfer	Hex. 1.27
40.320.007.01-2	2	0.4	30 N-cm	6.7	2.25	3.59	5.7	1	2.58	conical	45° Chamfer	Torx T6
40.320.007.02-2	2	0.4	30 N-cm	7.4	3.3	6	-	1.4	2.3	straight	Semi-sphere	Torx T6
40.320.007.03-2	2	0.4	30 N-cm	7.4	2.8	5.9	6.1	1.3	2.4	conical	Semi-sphere	Torx T6
40.320.007.04-2	2	0.4	30 N-cm	4.6	2.96	3.21	3.5	1.1	2.45	conical	45° Chamfer	Torx T6
40.320.007.05-2	2	0.25	25 N-cm	5	3	3.5	-	1.5	2.6	straight	30° Chamfer	Torx T6
40.320.008.01-2	2	0.4	30 N-cm	7	3.25	5	-	2	2.4	straight	45° Chamfer	Unigrip
40.320.008.02-2	2	0.4	30 N-cm	7.3	3	5.8	6.2	1.1	2.5	conical	45° Chamfer	Unigrip
40.320.008.03-2	2	0.4	30 N-cm	10	3.1	8.5	-	1.5	2.45	straight	45° Chamfer	Unigrip
40.320.008.04-2	2	0.4	30 N-cm	8.5	1.6	6.63	7	1.5	2.2	conical	45° Chamfer	Unigrip
40.325.002.01-2	2.5	0.45	30 N-cm	7.41	3.5	4.75	5.29	2.12	2.87	conical	Semi-sphere	Cuad. 1.30
40.325.008.01-2	2.5	0.45	30 N-cm	7	2.8	5.6	-	1.4	3.4	straight	45° Chamfer	Unigrip
40.320.003.01-2	2	0.4	30 N-cm	4.7	3	3.33	-	1.37	2.35	straight	45° Chamfer	Hex. 1.20
40.320.003.02-2	2	0.4	30 N-cm	7	3.25	5	-	2	2.4	straight	45° Chamfer	Hex. 1.20
40.320.003.03-2	2	0.4	30 N-cm	7.9	3.7	5.55	6.05	1.85	2.4	conical	45° Chamfer	Hex. 1.20
40.320.003.04-2	2	0.4	30 N-cm	8.4	2.75	5.68	6.35	2.05	2.3	conical	45° Chamfer	Hex. 1.20
40.320.003.05-2	2	0.4	30 N-cm	4.8	3.3	3.65	3.9	0.9	2.45	conical	45° Chamfer	Hex. 1.20
40.320.003.06-2	2	0.25	25 N-cm	4	2	2.5	-	1.5	2.3	straight	30° Chamfer	Hex. 1.20
40.320.003.07-2	2	0.25	25 N-cm	8.5	1.6	6.63	7	1.5	2.2	conical	45° Chamfer	Hex. 1.20
40.320.003.08-2	2	0.4	25 N-cm	4.2	2.2	2.7	-	1.5	2.3	straight	30° Chamfer	Hex. 1.20
40.320.005.01-2	2	0.4	30 N-cm	7.6	3.7	6	-	1.6	2.33	straight	45° Chamfer	Hex. 1.27
40.320.005.02-2	2	0.4	30 N-cm	10.3	4	8.3	-	2	2.45	straight	45° Chamfer	Hex. 1.27
40.320.005.03-2	2	0.4	30 N-cm	10.3	3.5	8.3	-	2	2.33	straight	45° Chamfer	Hex. 1.27
40.320.005.04-2	2	0.4	30 N-cm	10.5	3.2	8.15	8.4	2.1	2.5	conical	45° Chamfer	Hex. 1.27
40.320.005.05-2	2	0.4	25 N-cm	9	2.15	6.93	7.3	1.7	2.2	conical	45° Chamfer	Hex. 1.27

SCREWDRIVERS



STRAIGHT SCREWS


Straight screws cover all the thread metrics available on the market. We have several lengths for each metric to make the adaptation to the milled structures easier.




DYNAMIC MILLING TOOL SPECIFICATIONS



MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER	SEAT	CUTTING LENGTH	USEFUL LENGTH (max. drilling depth)	STEM CUTTING DIAMETER	SUPPORT DIAMETER (SHANK)	TOTAL LENGTH
		Øc		Lc	Lu	Øv	Øs	Lt
BEGO RS/RSX 3° ASTRA EVOLUTION 3.0° *Only for titanium and soft materials	33.325.472.01-2	1.4	25	0.4	4.7	0.5	3	50
	33.425.472.01-2	1.4	25	0.4	4.7	0.5	4	50
	33.625.472.01-2	1.4	25	0.4	4.7	0.5	6	50
STRAUMANN BONE LEVEL NP STRAUMANN BONE LEVEL RP MEDENTIS ICX TEMPLANT 4.1 STRAUMANN SYNOCTA 3.5 MEDENTIS ICX NARROW	33.315.804.01-2	1.6	15	0.7	8	0.65	3	50
	33.415.804.01-2	1.6	15	0.7	8	0.65	4	50
	33.615.804.01-2	1.6	15	0.7	8	0.65	6	50
ANTHOGYR AXIOM RG/PX XNP ANTHOGYR AXIOM RG/PX RP ANTHOGYR AXIOM RG/PX WP	33.320.704.01-2	1.6	20	0.7	7	0.8	3	50
	33.420.704.01-2	1.6	20	0.7	7	0.8	4	50
	33.620.704.01-2	1.6	20	0.7	7	0.8	6	50
ASTRA EVOLUTION 3.6 ANKYLOS ALPHABIO CONICAL STANDARD CONNECTION LASAK BIONIQ QR NEODENT GM ANKYLOS BALANCE BASE	33.330.734.01-2	1.6	30	0.7	7.3	0.8	3	50
	33.430.734.01-2	1.6	30	0.7	7.3	0.8	4	50
	33.630.734.01-2	1.6	30	0.7	7.3	0.8	6	50
NOBEL BIOACARE ACTIVE NP NOBEL BIOACARE ACTIVE 3.0 LASAK BIONIQ QN	33.335.754.01-2	1.6	35	0.7	7.5	0.65	0.5	50
	33.435.754.01-2	1.6	35	0.7	7.5	0.65	4	50
	33.635.754.01-2	1.6	35	0.7	7.5	0.65	6	50
OSSTEM TS NP CAMLOG SCREW LINE 3.8 NP CAMLOG SCREW LINE 4.3 RP KLOCKNER VEGA NV XIVE S 3.4 BIOTECH DENTAL KONTACT XNP BIOTECH DENTAL KONTACT RP DIO UF NP CAMLOG SCREW-LINE 3.3	33.345.804.01-2	1.6	45	0.7	8	0.65	3	50
	33.445.804.01-2	1.6	45	0.7	8	0.65	4	50
	33.645.804.01-2	1.6	45	0.7	8	0.65	6	50
MIS C1 NP MIS M4 NP CONELOG 3.8 CONELOG 4.3 ASTRA YELLOW ALPHABIO CONICAL HEX CONNECTION	33.360.754.01-2	1.6	60	0.7	7.5	0.65	3	50
	33.460.754.01-2	1.6	60	0.7	7.5	0.65	4	50
	33.660.754.01-2	1.6	60	0.7	7.5	0.65	6	50
BIOMET 3i CERTAIN NP ASTRA AQUA	33.390.754.01-2	1.6	90	0.7	7.5	0.65	3	50
	33.490.754.01-2	1.6	90	0.7	7.5	0.65	4	50
	33.690.754.01-2	1.6	90	0.7	7.5	0.65	6	50
ASTRA EVOLUTION 4.2	33.350.775.01-2	1.7	50	0.7	7.7	0.8	3	50
	33.450.775.01-2	1.7	50	0.7	7.7	0.8	4	50
	33.650.775.01-2	1.7	50	0.7	7.7	0.8	6	50
BIOMET 3i CERTAIN RP NOBEL BIOACARE BRANEMARK NP NOBEL BIOACARE REPLACE NP MEGAGEN ANYRIDGE RP BIOMET 3i CERTAIN WP	33.390.805.01-2	1.7	90	0.7	8	0.65	3	50
	33.490.805.01-2	1.7	90	0.7	8	0.65	4	50
	33.690.805.01-2	1.7	90	0.7	8	0.65	6	50
BEGO S/RI 3.25-3.75 BEGO S/RI 4.1 BEGO S/RI 4.5 BEGO S/RI 5.50 STRAUMANN SCREW-RETAINED NC/RC BEGO MULTI-PLUS	33.335.676.01-2	1.8	35	1	6.7	0.9	3	50
	33.435.676.01-2	1.8	35	1	6.7	0.9	4	50
	33.635.676.01-2	1.8	35	1	6.7	0.9	6	50
KLOCKNER ESSENTIAL CONE 4.5 DIRECTO IMPLANTE KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 12° KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 25° KLOCKNER VEGA RV XIVE S 3.8 XIVE S 4.5 BIOHORIZONS 3.0 STRAUMANN SYNOCTA 6.5 STRAUMANN BLX RB STRAUMANN BLX WB STRAUMANN TLX NT STRAUMANN TLX RT STRAUMANN TLX WT DENTIUM MU SUPERLINE	33.345.856.01-2	1.8	45	1	8.5	0.9	3	50
	33.445.856.01-2	1.8	45	1	8.5	0.9	4	50
	33.645.856.01-2	1.8	45	1	8.5	0.9	6	50

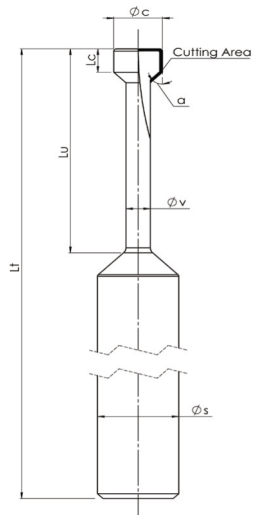

3 FLUTE T-SLOT CUTTER



MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER Øc	SEAT	CUTTING LENGTH Lc	USEFUL LENGTH (max. drilling depth) Lu	STEM CUTTING DIAMETER Øv	SUPPORT DIAMETER (SHANK) Øs	TOTAL LENGTH Lt
"MIS C1 RP PALTOP UNIVERSAL MULTI UNIT MIS C1 WP S&M PREMIUM KHONO 3.3 S&M PREMIUM KHONO 3.8 S&M OUTLINK 3.3 S&M OUTLINK 4.1 S&M PREMIUM KHONO 4.25 BREDENT SKY NP BREDENT SKY RP ADIN TOUAREG/CLOSEFIT NP ADIN TOUAREG/CLOSEFIT UNP CAMLOG CONOLOG 3.3 GLOBAL D (TEKKA) EASY IMPLANT MINI ROOT R"	33.360.756.01-2	1.8	60	1	7.5	0.9	3	50
	33.460.756.01-2	1.8	60	1	7.5	0.9	4	50
	33.660.756.01-2	1.8	60	1	7.5	0.9	6	50
"ZIMMER SCREW-VENT 3.5 ZIMMER SCREW-VENT 4.5 ASTRA EVOLUTION UNIT ABUTMENT ZIMMER TYPE 5.7 OXY FIXO	33.370.716.01-2	1.8	70	1	7.1	0.9	3	50
	33.470.716.01-2	1.8	70	1	7.1	0.9	4	50
	33.670.716.01-2	1.8	70	1	7.1	0.9	6	50
"NOBEL BIOACARE BRANEMARK RP NOBEL BIOACARE MULTI-UNIT RP BIOMET 3i OSSEOTITE NP BTI EXTERNAL CONNECTION NP BTI INTERNAL CONNECTION RP MIS MULTI-UNIT ST KEYSTONE PRIMA NP KEYSTONE PRIMA RP KEYSTONE PRIMA WP NEOSS PROACTIVE 3.4 NEOSS PROACTIVE 4.1 BIOMET 3i OSSEOTITE WP BTI EXTERNAL CONNECTION WP BTI MULTI-IM UNIVERSAL RP ANTHOGYRD MULTI-UNIT 4.8 BEGO MINI BTI INTERNAL WP LASAK MULTI-UNIT ON/OR SIC SICACE 3.3 SIC SICACE 4.2 IMPLANT DIRECT"	33.390.716.01-2	1.8	90	1	7.1	0.9	3	50
	33.490.716.01-2	1.8	90	1	7.1	0.9	4	50
	33.690.716.01-2	1.8	90	1	7.1	0.9	6	50
"STRAUMANN INTERNAL OCTAGON RP STRAUMANN INTERNAL OCTAGON 6.5"	33.315.708.01-2	1.8	15	1	7	1	3	50
	33.415.708.01-2	2	15	1	7	1	4	50
	33.615.708.01-2	2	15	1	7	1	6	50
STRAUMANN SYNOCCTA RP	33.330.708.01-2	2	30	1	7	1	3	50
	33.430.708.01-2	2	30	1	7	1	4	50
	33.630.708.01-2	2	30	1	7	1	6	50
"NOBEL BIOACARE ACTIVE RP NOBEL BIOACARE ACTIVE WP"	33.335.758.01-2	2	35	1	7.5	1	3	50
	33.435.758.01-2	2	35	1	7.5	1	4	50
	33.635.758.01-2	2	35	1	7.5	1	6	50
"OSSTEM TS RP CAMLOG SCREW-LINE 5.0 CAMLOG SCREW-LINE 6.0"	33.345.808.01-2	2	45	1	8	1	3	50
	33.445.808.01-2	2	45	1	8	1	4	50
	33.645.808.01-2	2	45	1	8	1	6	50
"NOBEL BIOACARE REPLACE RP ASTRA LILAC NOBEL BIOACARE REPLACE WP ASTRA EVOLUTION 4.8 NOBEL BIOACARE BRANEMARK WP ASTRA EVOLUTION 5.4 NOBEL BIOACARE REPLACE 6.0"	33.390.958.01-2	2	90	1	9.5	1	3	50
	33.490.958.01-2	2	90	1	9.5	1	4	50
	33.690.958.01-2	2	90	1	9.5	1	6	50

SCREWDRIVER ADAPTOR

Screwdriver for the Dynamic Scanbody System



Ref. 43.621.410.01-2
Screwdriver with manual handle
Standard length: 21 mm



Ref. 43.621.415.01-2
Tiny Screwdriver with manual handle
Length: 21 mm



Ref. 43.624.410.01-2
Contra-angle
Length: 24 mm



Ref. 43.620.411.01-2
Multi-Unit
Contra-angle
Length: 20 mm

COMPLEMENTS



Manual handle

Made of stainless steel.
They are used to connect screwdriver bits with the contra-angle connection

Large manual handle for laboratory

Ref. 49.601.000.03-2

Ideal to manipulate models in the laboratory
Length: 55.65 mm



Manual handle for clinic

Ref. 49.601.000.01-2

Clinic handle: used to position the prosthesis in the mouth prior to torque control in the clinic.
Length: 15.65 mm



Universal manual torque wrench prosthetic

Ref. 11.990.990.07-2

Torque wrench
4 mm square connection.
Torque 10-35N.c



Dynamic Screw Transfer

Ref. 49.413.000.01-2

Manual torque wrench adapter prosthetic

Piece to connect the screwdriver with contra-angle connection to the torque wrench.



Universal Manual torque wrench adapter

Ref. 49.604.000.05-2
4 mm Square connection



Straumann Manual torque wrench adapter

Ref. 49.604.000.07-2
Straumann connection



Nobel Biocare Manual torque wrench adapter

Ref. 49.604.000.08-2



MIS Manual torque wrench adapter

Ref. 49.604.000.09-2

DYNAMIC SCREWDRIVERS

Screwdriver with hexalobular head, exclusively to the 3.0 Dynamic Abutment System.
Lengths: 18, 24, 32 mm



Ref. 43.618.201.01-2
Hexalobular 1,70 mm.
Length: 18 mm



Ref. 43.632.201.01-2
Hexalobular 1,70 mm.
Length: 32 mm



Ref. 43.624.201.01-2
Hexalobular 1,70 mm.
Length: 24 mm

DAS MU SYSTEM COMPONENTS



MU Dynamic TiBase
Non-engaging*
31.322.209.01-2

Engaging*
31.312.209.01-2



MU Dynamic 3TiBase
Non-engaging*
31.322.209.21-2



Reference Scanbody
Non-engaging*
54.322.209.31-2



Engaging*
54.312.209.31-2



Healing Cap
Regular
40.320.003.88-2



Wide
40.320.003.89-2



MU ScAnalog
23.412.209.01-2



MU Scanbody 4,5 mm
53.412.209.01-2




MU Scanbody 8 mm
Non-engaging*
53.422.209.02-2



MU Dynamic Scanbody
52.408.137.01-2



Dynamic Scanbody Adaptor
50.312.209.01-2



Screwdriver Adaptor
43.621.410.01-2



43.624.410.01-2



Impression coping
Non-engaging*
29.301.000.11-2



Titanium Abutment
Non-engaging*
35.312.209.21-2

Engaging*
35.322.209.21-2



Digital Analog
34.312.209.01-2



Analog
22.612.209.01-2



Digital Analog Positioner
49.309.000.01-2



Dynamic Screw
41.320.040.01-2



**Provisional (temporary)
Dynamic Screw**
41.320.050.02-2



Straight Screw
40.320.003.06-2

COMPONENTS OPTIONS: * Non-engaging - R * Engaging - NR

DAS MU SYSTEM COMPONENTS

Peek Pins


Type A

49.414.000.01-2 (6 mm)
49.415.000.01-2 (9 mm)
49.416.000.01-2 (13 mm)




Type B

49.414.000.02-2 (6 mm)
49.415.000.02-2 (9 mm)
49.416.000.02-2 (13 mm)



Type C

49.414.000.03-2 (6 mm)
49.415.000.03-2 (9 mm)
49.416.000.03-2 (13 mm)



Type D

49.416.000.04-2 (13 mm)



Type E

49.416.000.05-2 (13 mm)



CAPS

Regular

49.418.000.01-2 (3,8 mm)
49.419.000.01-2 (6 mm)
49.420.000.01-2 (8 mm)



Wide

49.418.000.02-2 (3,8 mm)
49.419.000.02-2 (6 mm)
49.420.000.02-2 (8 mm)



Ratchet

49.409.000.01-2



Screwdriver

43.321.316.01-2



43.322.316.01-2



Mu ANG Insertion tool

49.422.000.01-2



Dynamic Screwdriver

43.618.201.01-2 (18 mm)
43.624.201.01-2 (24 mm)
43.632.201.01-2 (32 mm)



Screwdriver Hex.1,2

43.601.103.02-2



MU DMTone

33.390.716.01-2 Shank Ø3
33.490.716.01-2 Shank Ø4
33.690.716.01-2 Shank Ø6

INTERNAL DAS MU SYSTEM COMPONENTS



MU Dynamic TiBase

Type A Engaging*
31.312.210.01-2



Type B Engaging*
31.313.210.01-2



Non-engaging*
31.322.210.01-2




Reference Scanbody
Engaging*
54.312.210.31-2




Healing Cap
Regular
40.318.003.89-2



Peek Pins
Type A
49.414.000.01-2 (6 mm)
49.415.000.01-2 (9 mm)
49.416.000.01-2 (13 mm)



Type B
49.414.000.02-2 (6 mm)
49.415.000.02-2 (9 mm)
49.416.000.02-2 (13 mm)



Type C
49.414.000.03-2 (6 mm)
49.415.000.03-2 (9 mm)
49.416.000.03-2 (13 mm)



Type D
49.416.000.04-2 (13 mm)



Type E
49.416.000.05-2 (13 mm)



CAPS
Regular
49.418.000.01-2 (3,8 mm)
49.419.000.01-2 (6 mm)
49.420.000.01-2 (8 mm)



Wide
49.418.000.02-2 (3,8 mm)
49.419.000.02-2 (6 mm)
49.420.000.02-2 (8 mm)



Dynamic Screw
41.318.050.01-2



Provisional (temporary)
Dynamic Screw
41.318.057.01-2



Ratchet
49.409.000.02-2



Screwdriver
43.321.320.01-2



Digital Analog
34.312.210.01-2



Digital Analog Positioner
49.309.000.01-2



Dynamic Screwdriver
43.618.201.01-2 (18 mm)
43.624.201.01-2 (24 mm)
43.632.201.01-2 (32 mm)



MU DMTone
33.390.716.01-2 Shank Ø3
33.490.716.01-2 Shank Ø4
33.690.716.01-2 Shank Ø6

COMPONENTS OPTIONS: * Non-engaging = R * Engaging = NR

TERMS AND CONDITIONS

These guarantee terms and conditions ("T&C") cover the entire range of Talladium products ("Products"), manufactured by TALLADIUM ESPAÑA S.L. and distributed by Geoda Medical S.L. or official dealers. The guarantee described in these T&C is exclusively in benefit of the clinician ("Clinician") and of the dental technician ("Technician") and not for the benefit of third parties or institutions, including patients.

GUARANTEE PERIOD

TALLADIUM ESPAÑA S.L. offers a lifelong guarantee for its entire range of products starting from the date of issue of the invoice.

GUARANTEE SCOPE

Subject to the limitations and exceptions described in these T&C, TALLADIUM ESPAÑA S.L. will offer the following benefits:

QUALITY: If there are defects in the materials or in the manufacturing of the Product, TALLADIUM ESPAÑA S.L. will replace the Product with no additional cost.

SAFETY: If, having complied with all the product indications, the prosthesis should have to be made again, due to a fault in the Dynamic Abutment or Dynamic Titanium Base system, TALLADIUM ESPAÑA S.L. will replace the abutments and screws necessary to remake the prosthesis, as well as the costs derived from its manufacturing.

In case of having used our products and having complied with all the product indications, the implants suffer any damage, TALLADIUM ESPAÑA S.L. will pay the cost of the implants. This coverage will only be valid during the first 6 months after the collocation of the prosthesis which includes our products.

CLAIM REQUIREMENTS AND PROCEDURE

To receive the benefits indicated in these T&C, the treating Clinician must satisfy the following requirements:

- The claim must be notified to TALLADIUM ESPAÑA S.L. within (30) days since the date the claimed defect was detected.
- This requires that the Clinician or Technician must contact the customer service department by telephone or by e-mail to make the claim.
- A claim form will be completed, which, together with a document or report which justifies the faulty Product and the faulty Product itself, will be sent by the customer to TALLADIUM ESPAÑA S.L. offices, within the previously indicated period.
- Clinicians or Technicians presenting a claim in agreement with these T&C must be up to date in any payments owing to TALLADIUM ESPAÑA S.L. or to any of its subsidiaries, at the time when the claim form is presented.
- All the use procedures of our Products must be carried out in agreement with the instructions of TALLADIUM ESPAÑA S.L. as well as in accordance with commonly accepted dentistry practices.
- The expenses derived from this procedure will be assumed by the customer. The return shipping costs will be assumed by TALLADIUM ESPAÑA S.L. in all those cases covered by these T&C.

Regardless of the guarantee rights, claims should be notified as soon as possible in order to comply with regulatory requirements.

GENERAL LIMITATIONS OF THIS GUARANTEE

With the exception of the guarantee described in these T&C, neither TALLADIUM ESPAÑA S.L. nor its representatives, nor third parties manufacturing or distributing the Products, represent or offer a guarantee, agreement or any other express or implicit, oral or written, commitment, with respect to the Products (without limitation), including guarantees involved in the marketing, durability or suitability for individual uses or purposes. In addition and within the maximum extent permitted by the relative law, TALLADIUM ESPAÑA S.L. rejects (on its own behalf, and on behalf of its representatives and third parties that manufacture or distribute Products) any responsibility with respect to any direct or indirect damage caused, which may result from or be a consequence of the design, composition of the dental prosthesis into which the Products are integrated.


GUARANTEE EXCLUSIONS

TALLADIUM ESPAÑA S.L. limits this guarantee to:

- Transformed abutments that form part of the dental prosthesis. But not the screws used to anchor them.
- Those products that are not used with the accessories and parts marketed by Talladium España

AMENDMENT OR SUSPENSION OF THE GUARANTEE


TALLADIUM ESPAÑA S.L. reserves the right to amend or withdraw these T&C at any time and without prior notification. Any modification or suspension shall not affect products already placed in patients.




This printed version is probably outdated and may not include all products or compatibilities.

Scan and download the latest version of this catalogue

www.dynamicabutment.com

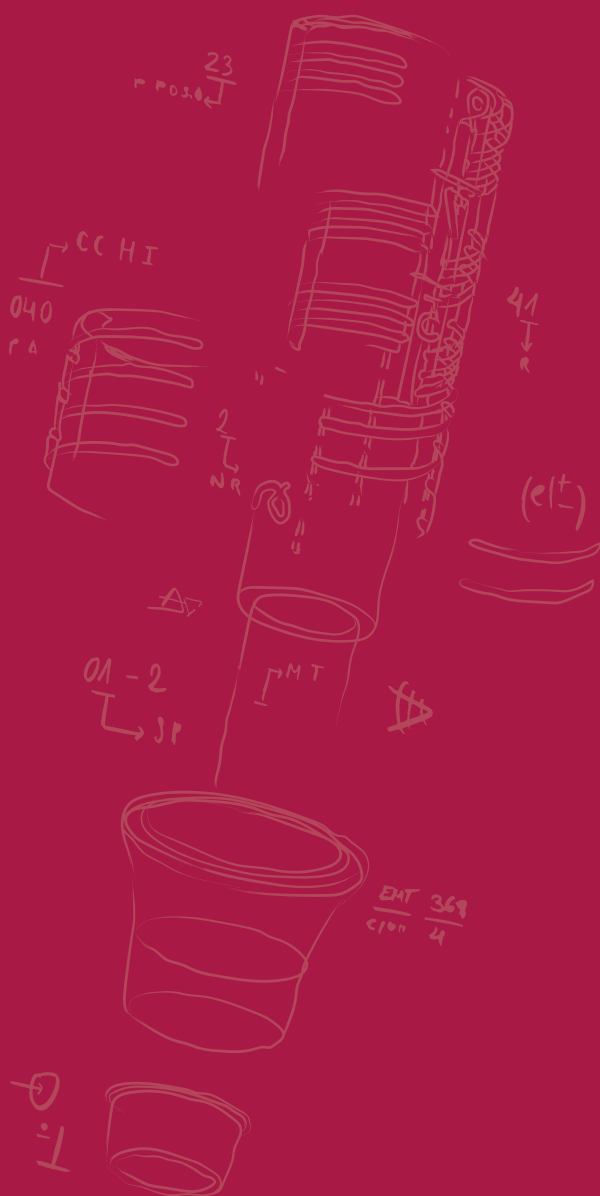

www.dynamicabutment.com

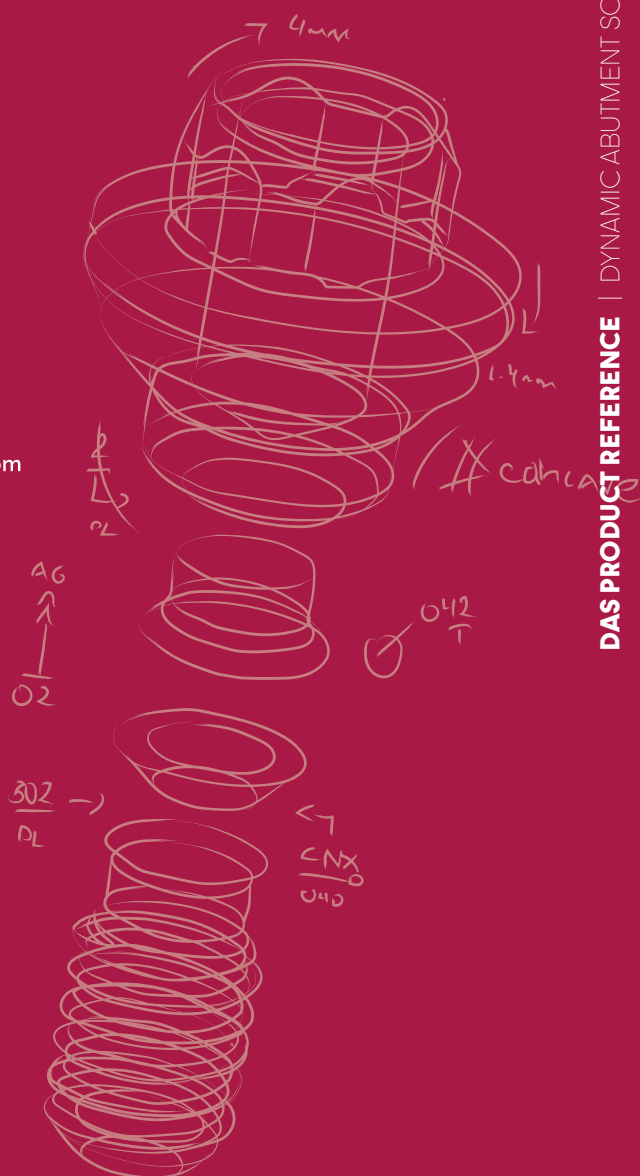

Virginia Woolf, 17
25005 · Lleida (Spain)

INTERNATIONAL +34 873 450 709
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com