

VIEWBOARD

ViewBoard IFP7533-G

Key Features


- Integrated with
 myViewBoard software
- Multi-tasking capabilities for enhanced lesson delivery
- Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11



Product **Description**

The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.



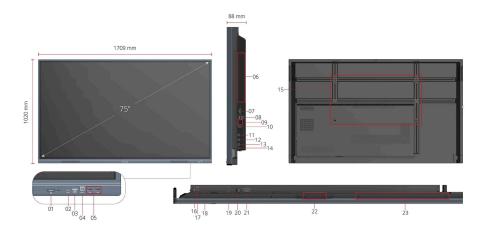

- 1. POWER ON/OFF
- 2. USB C 3. HDMI 1
- 4. TOUCH 1
- 5. USB 3.0x2 6. OPS Slot 7. RS-232
- 8. LAN 9. USB 2.0x2
- 10. TOUCH 2
- 11. HDMI 2 12. HDMI 3
- 13. HDMI OUT 14. USB
- 15. VESA® Wall Mount (800x400mm)

22. Wi-Fi Slot

23. Sensor Mount

- 16. SPDIF
- 17. AUDIO in 18. AUDIO out
- 19. VGA 20. Power On/OFF 21. AC IN

Visit Us

www.viewsonic.com



| DISPLAY | | TOP CAMERA PLATE | |
|-----------------------|--|--|--|
| Panel Size: | 75" | Yes | |
| Panel Type: | TFT LCD Module with DLED Backlight. IPS | EMBEDDED OS | |
| | | Android 11 (next 3 OS version upgradable) | |
| Display Area (mm): | 1649.664(H) × 927.936(V) (74.6" diagonal) | BUNDLE SOFTWARE Basic Annotation Software: myViewBoard | |
| Aspect Ratio: | 16:9 | Basic Annotation Software. | Whiteboard |
| Resolution: | 4K UHD 3840x2160(Pixels) | Pro Annotation Software: | myViewBoard for Windows (Embedded in optional Windows Slot- in PC) |
| Colors: | 1.07B colors | Wireless Presentation: | myViewBoard Display |
| Brightness: | 400 nits | Wilciess i rescritation. | Remote Device |
| Contrast Ratio: | 5000:1 (Typical) | Device Management: | Management: myViewBoard Manager |
| Response Time: | 6ms | Wireless Presentation with Touch | illy view board in allager |
| Viewing Angles: | H=178, V=178 | Feedback: Viewboard Cast: | Yes |
| Backlight Life: | 50,000 Hours | SPECIAL FEATURES | |
| Surface Treatment: | Hardness: 7H, 4mm tempered glass, Anti- Glare, Anti-Dust and Anti-Fingerprint Technologies | All-in-one USB port: | (combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels. |
| Orientation: PLATFORM | Landscape | Simple LAN sharing between IFP and slot-in device: | 10/100M for Android & Slot-in PC |
| Processor: | Quad-core ARM Cortex (A55*4) GPU: Quad-core ARM Mali G52 (Support 4K | Light Sensor: | Yes |
| | | POWER | |
| | | Voltage: | 100-240V AC |
| RAM: | UHD) 8GB DDR4 | Consumption: | On:106W; Off: ≤ 0.5W |
| | | ERGONOMICS | |
| Storage: TOUCH | 64GB/128GB | Wall Mount (VESA®): | 800x400 |
| TOOCH | (IR) Ultra-Fine Touch | OPERATING CONDITIONS | |
| Type/ Tech: | Technology | Temperature (° C): | 0°C to 40°C |
| Touch Point: | 20 for Android, 40 points touch for windows. Touch Accuracy:± 1 mm. Air Gap:0.9 mm | Humidity: | 20% ~ 80% RH non- condensing |
| | | DIMENSIONS (W X H X D) | |
| INPUT | | Physical (inch / mm): | 1709 x 1020 x 88 mm / 67.3 x 40.2 x 3.5 in |
| HDMI: | HDMI-IN 2.0 x 3 (3840x2160 @60Hz) | Packaging (inch / mm): | 1863 x 1140 x 225 mm / 73.3x 44.9 x 8.6 in |
| RGB / VGA: | x1 | WEIGHT | |
| Audio: | x1 | Net (lb / kg): | 104.3lb/47.3kg |
| RS232: | x1 | Gross (lb / kg): | 133.5lb/60.55kg |
| OPS: | x1 (Optional Intel Standard OPS) | REGULATIONS | |
| WiFi: | x1 (Optional VB-WIFI- 002/VB-WIFI- | FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI,BIS | |
| | 004/VSB050) | PACKAGE CONTENTS | |
| OUTPUT | | 1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m | |
| HDMI: | HDMI 2.0 x1 | | |
| Audio: | x1 | | |
| SPDIF: | x1 | COMPATIBLE SLOT-IN PC | |
| LAN | | VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16 | |
| RJ45: | x2 (Gigabyte Ethernet) | NOTE | |
| Type A: | USB3.0 x4 (Front x2, Rear x2); USB2.0 x1 | Other Apps: Live, Record, PIP, Split Screen, Screen Lock | |
| Туре В: | x2 (Front x1, Rear x1) | | |
| Type C: | Frontx1 (PD65W + | | |
| | DP1.2 + Data USB2.0 | | |

SPEAKERS

16W x 2

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

